Service
Service
Service

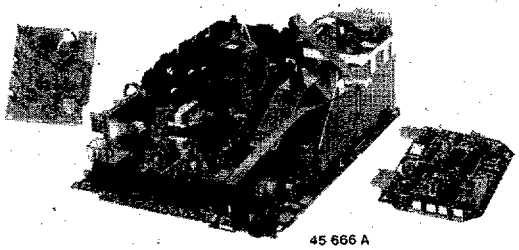
45 666 A

Service Manual

Contents

		Page
1.	Block diagram and technical specification	1.2
2.	Connection facilities	2.1
3.	Warnings and notes	3.1
4.	Mechanical instructions	4.1
5.	Overview oscillograms	5.1
	Detailed block diagram	5.3
6.	Electrical diagrams and PC-board layouts	
	Control (Diagram A)	6.1
	Tuner, IF and sound (Diagram B)	6.5
	Video processing (Diagram C)	6.9
	Power supply, synchronization, frame and line (Diagram D)	6.16
	Separate operation (Diagram E)	6.26
	Picture tube module (Diagram F)	6.27
	Mono IF/sound module (Diagram G)	6.30
	Stereo IF/sound module (Diagram H)	6.35
	NICAM IF/sound module (Diagram I)	6.41
	PIP module (Diagram K)	6.47
	Teletext module (Diagram J)	6.52
7.	Electrical adjustments	7.1
8.	List of error messages and repair tips	8.1
9.	Directions for use and survey of menus	9.1
10.	Electrical spare parts lists	10.1

Published by Consumer Electronics Printed in The Netherlands ©Copyright reserved Subject to modification GB 4822 727 19063

Block diagram

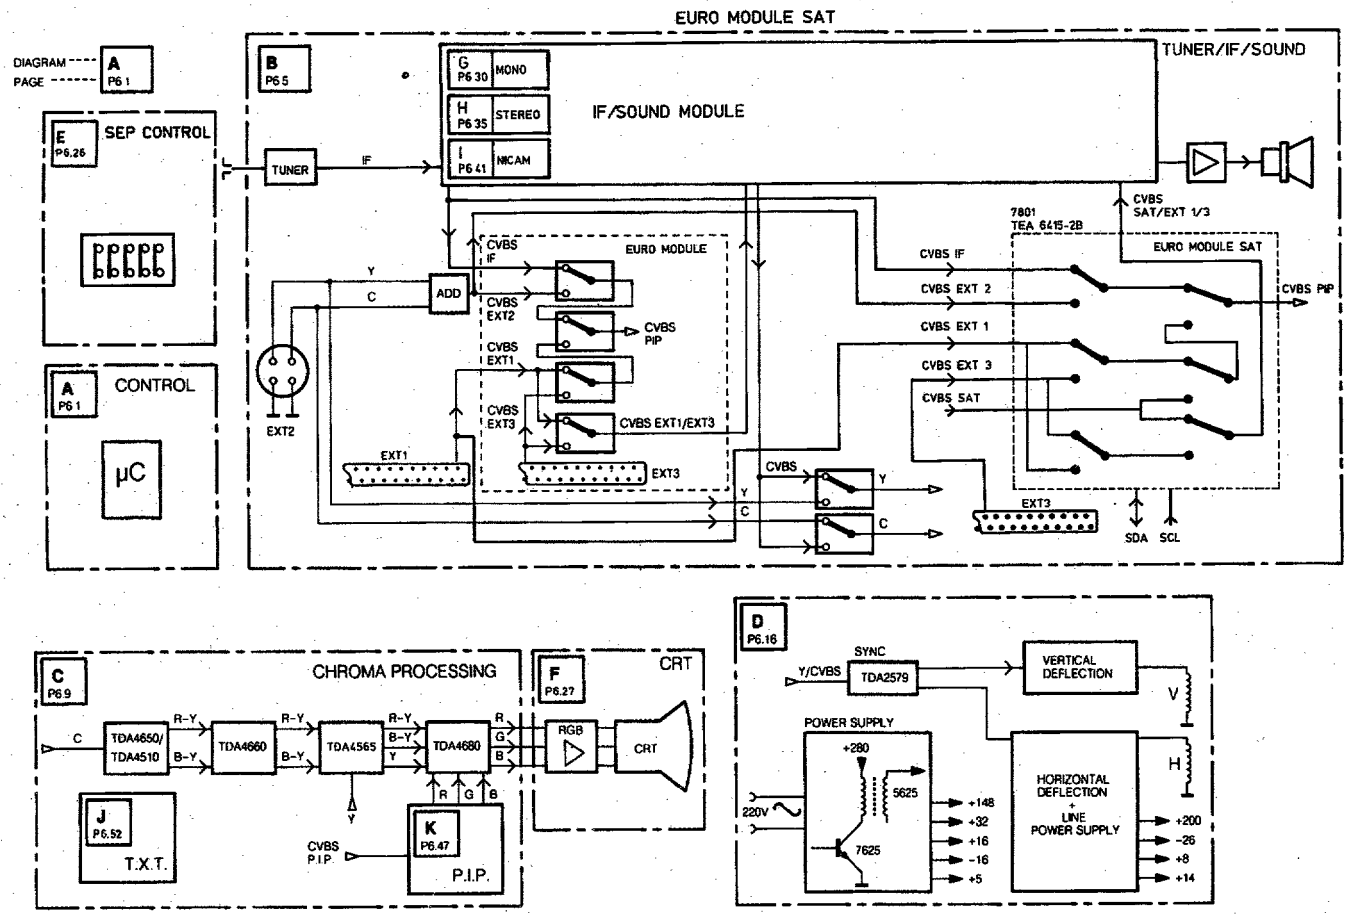

Technical specification

Mains voltag	:220 - 240 V (± 10%)
Mains frequency	:50 Hz (± 10%)
Aerial input impedance	:75Ω - coax
Minimum aerial voltage	:40μV
Maximum aerial voltage	:32mV
Pull-in range colour synchronization	: ± 300Hz
Pull-in range horizontal synchronization	: ± 300Hz

Local operation functions:

P +; P -; ◿ +; ◿ -; install

Programmes: 0-59
VCR operation on programmes: 0-59

Indications:

- On Screen Display (OSD)

- LED: - standby (red)
  - operation (green)
  - RC5 reception (flashing yellow)
  - internal fault in μP (flashing)

Errata

DIAGRAM: SCHALTBILD:	LOCATION: POSITION:	CORRECTION: KORREKTUR:	
(Page/ Seite):		Present situation: Vorliegende Situation:	Corrected situation: Korrekte Situation:
B (6.6)	C20	Item number R3386 Positionsnummer R3386	Item number R3886 Positionsnummer R3886
B (6.7)	O24	Connecting line reference E58 Verbindungsleitung Ref. E58	Connecting line reference D58 Verbindungsleitung Ref. D58
B (6.6)	B14	Connecting line reference A21 Verbindungsleitung Ref. A21	Connecting line reference D21 Verbindungsleitung Ref. D21
C (6.11)	K24	C2366	Delete C2366 C2366 entfernen
C (6.11)	N15 N16	Circuitry with TS7372 Circuitry with TS7374 Schaltung mit TS7322 Schaltung mit TS7374	Delete R3394, TS7372 and short circuit e-c TS7372 Delete R3395, TS7374 and short circuit e-c TS7374 R3394. TS7372 entfernen und Stromkreis e-c TS7372 kurzschließen R3305, TS7374 entfernen und Stromkreis e-c TS7374 kurzschließen
D (6.17)	E17		Add R3537 100kΩ (4822 116 52234) in series with R3539 R3537 100kΩ (4822 116 52234) in Reihe mit R3539 schalten
D (6.16)	A2	Connecting line reference B40 Verbindungsleitung Ref. B40	Connecting line reference B21 Verbindungsleitung Ref. B21
F (6.27/6.28)	D10	cD6301 connected to cTS7305 cD6331 connected to cTS7335 cD6361 connected to cTS7356 cD6302 verbunden mit cTS7305 cD6331 verbunden mit cTS7335 cD6361 verbunden mit cTS7356	cD6301 connected to bTS7305 cD6331 connected to bTS7335 cD6361 connected to bTS7356 cD6301 verbunden mit bTS7305 cD6331 verbunden mit bTS7335 cD6361 verbunden mit bTS7356
PWB mono carrier/Leiterplatte Monoträger (6.20)	F2	S5561	S5661
Spare parts list/ Stückliste (10.4)		6648-4822 130 34488-BZX79/F12	6648-4822 130 34197-BZX79/B12

Electrical adjustments/Electrische Abgleicharbeiten

Adapted Vg2, white drive, white limiter and cut-off settings: see service information GR2.2 93.02
Angepaßte Einstelungen für Vg2, Weißabgleich, Weißspitzenbegrenzung und Sperrpunktabgleich: siehe Service Information GR2.2 93.02

Turn page/Bitte wenden

Modifications during production/Änderungen während der Herstellung

* Modified line output transformer T5545: see of point 1 of service information GR2.2 93.01
* Modifizierter Zeilenausgangstransformator T5545: siehe Punkt 1 der Service-Information GR2.2 93.01

* Modified CRT panel: see points 2 and 3 of service information GR2.2 93.01
* Modifizierte CRT-Platine: siehe Punkt 2 und 3 der Service-Information GR2.2 93.01

* Modified TXT module: see service information GR2.2 93.03
* Modifiziertes Videtext-Modul: siehe Service-Information GR2.2 93.03

* Modified IF module: see service information GR2.2 94.01
* Modifiziertes ZF-Modul: siehe Service-Information GR2.2 94.01

Connection facilities

1. Specification of the terminal sockets

EXT1



1 - Audio ⊖ R (0,5V_{RMS} ≤ 1kΩ)
2 - Audio ⊖ R (0,2 - 2V_{RMS}; 0,5 V_{nom}; ≥ 10kΩ)
3 - Audio ⊖ L (0,5V_{RMS} ≤ 1kΩ)
4 - Audio ⊥
5 - Blue ⊥
6 - Audio ⊖ L (0,2 - 2V_{RMS}; 0,5 V_{nom}; ≥ 10kΩ)
7 - Blue ⊖ (0,7V_{pp}/75Ω)
8 - RC5 ⊖ (500-800mV_{pp}) + CVBS-Status 1 ⊖ (0-2V: int.; 9,5-12V: ext.)
9 - Green ⊥
10 - -
11 - Green ⊖ (0,7V_{pp}; 75Ω)
12 - -
13 - Red ⊥
14 - -
15 - Red ⊖ (0,7V_{pp}; 75Ω)
16 - RGB-Status (0-0,4V: int. 1-3V ext. 75Ω)
17 - CVBS ⊖ ⊥
18 - CVBS ⊖ ⊥
19 - CVBS ⊖ (1V_{pp}/75Ω)
20 - CVBS ⊖ (1V_{pp}/75Ω)
21 - Earth screen

EXT2

1 - ⊥
2 - ⊥
3 - Y ⊖ (1V_{pp}; 75Ω)
4 - C ⊖ (1V_{pp}; 75Ω)

2x ◎ CINCH Audio ⊖ L+R (0,2-2V_{RMS}; 0,5 V_{nom} ≥ 10kΩ)

EXT3



1 - Audio ⊖ R (0,5V_{RMS}; ≤ 1kΩ)
2 - Audio ⊖ R (0,2 - 2V_{RMS}; 0,5 V_{nom}; ≥ 10kΩ)
3 - Audio ⊖ L (0,5V_{RMS}; ≤ 1kΩ)
4 - Audio ⊥
5 -
6 - Audio ⊖ L (0,2 - 2V_{RMS}; 0,5 V_{nom}; ≥ 10kΩ)
7 - -
8 - CVBS status 3 ⊖ (0-2V: int.; 9,5-12V: ext.)
9 - -
10 - -
11 - -
12 - -
13 - -
14 - -
15 - -
16 - -
17 - CVBS ⊖ ⊥
18 - CVBS ⊖ ⊥
19 - CVBS ⊖ (1V_{pp}/75Ω)
20 - CVBS ⊖ (1V_{pp}/75Ω)
21 - Earth screen

Audio out

2x ◎ CINCH Audio ⊖ L+R (0,5V_{RMS}; ≤ 1kΩ)

Front

◎ 3.5mm ≥ 8Ω

2. Connecting equipment

Depending on the type of TV set, a variety of equipment can be connected. The exact number of pieces of equipment depends on the number of connectors on the back of the TV set (EXT1, 2 or 3). The wiring diagram in Fig. 2.1 shows which kinds of equipment can be connected. The wiring diagram shows the TV set with the maximum number of connectors possible for the GR2.2 chassis.

An RGB source (e.g. laserdisc player) can only be connected to EXT1. In order to switch the TV set to RGB operation, this RGB source must generate both a CVBS status signal at pin 8 and an RGB status signal at pin 16 of the euroconnector. It is not possible to switch the equipment to EXT1 in RGB operation using the remote control.

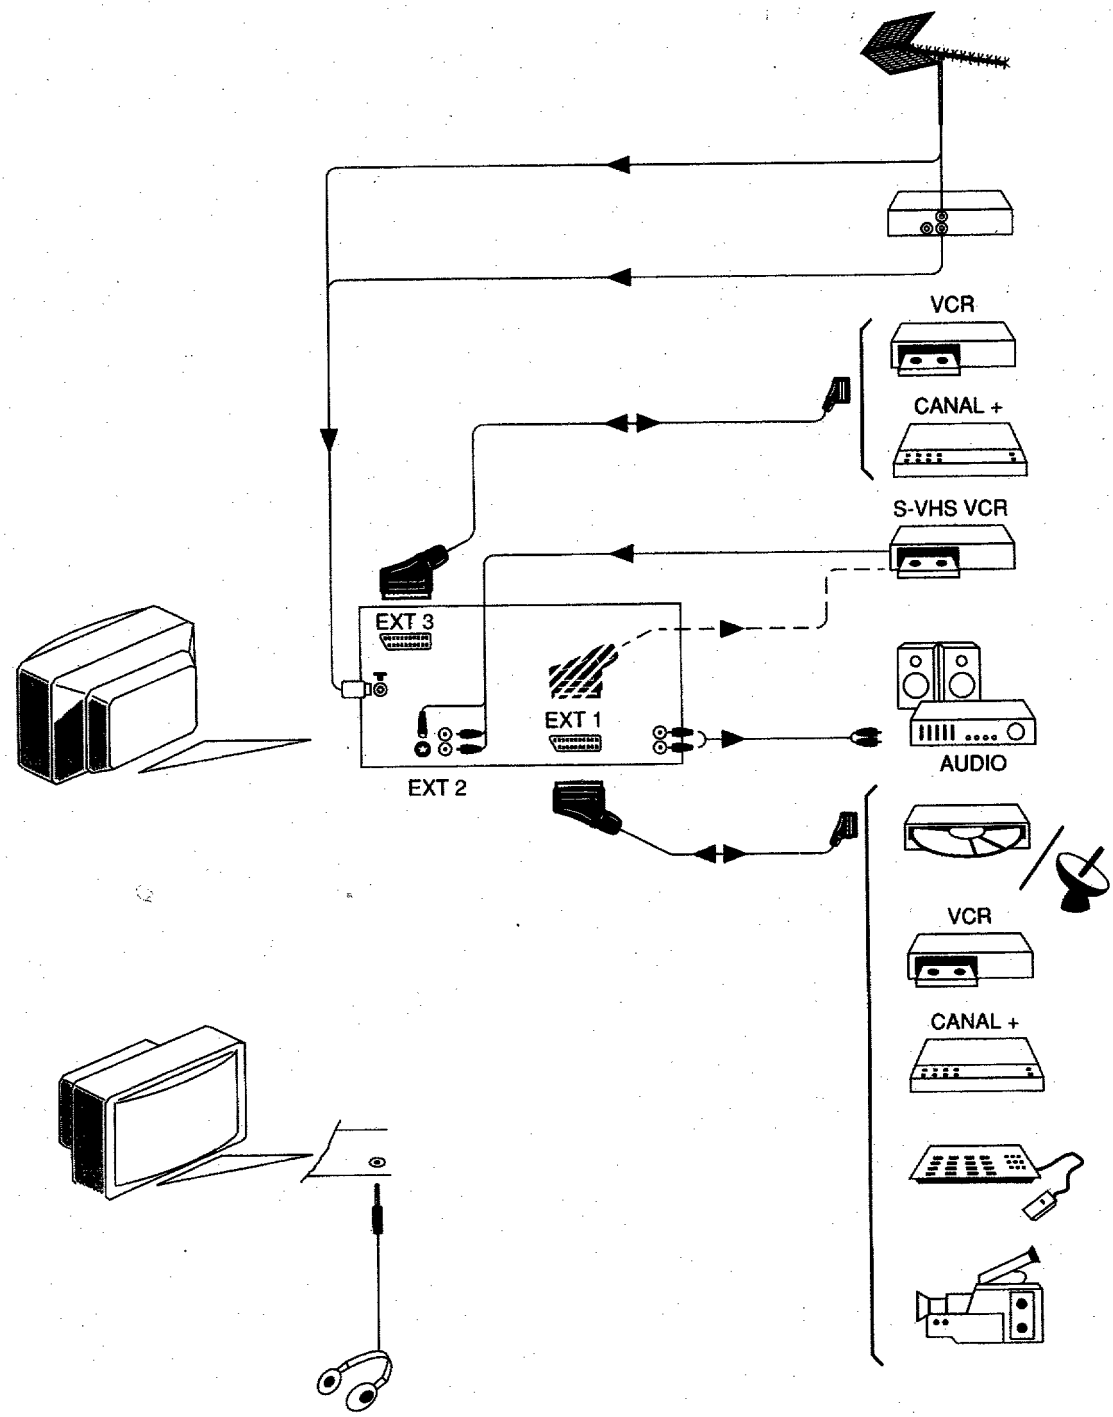

Fig. 2.1

Mechanical instructions

1. Removing the back plate

It is only possible to remove the back plate after removing the screws on the top, side, possibly on the underneath **and possibly under the EXT 3 connection** (see Fig. 4.1). In the case of subwoofer units, the subwoofer speaker on the carrier panel should also be unplugged.

2. Service position 1

Service position for module service and to measure test points
Unlock the chassis after the cables of the degaussing coil and any PIP module have been disconnected, and pull it backwards until all test points are accessible (see Fig. 4.2).
In order to make the tuner and the IF/sound module accessible, the bracket above these modules can be removed (see Fig. 4.3). With the exception of one fault message, the unit continues to function normally when the PIP module is not connected.

3. Service position 2

Service position for repair
Place the chassis on the heat sink on the tuner side after service position 1 is reached (see Fig. 4.4).
Warning: make sure that the heat sink of the sound output amplifier does not form a short circuit with the raster/line heat sink if the bracket of the euromodule has been removed!

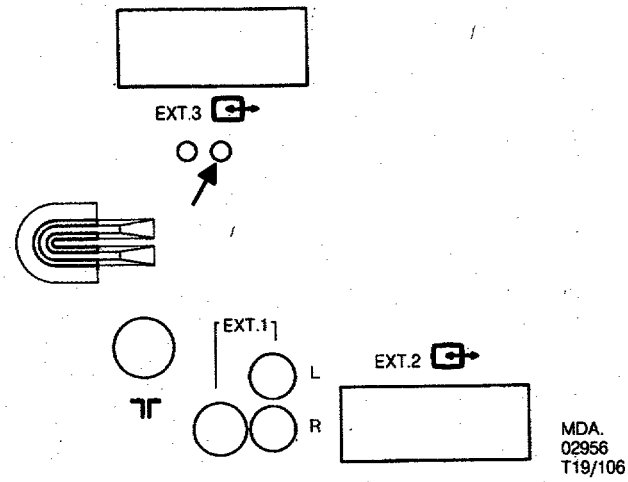

Fig. 4.1

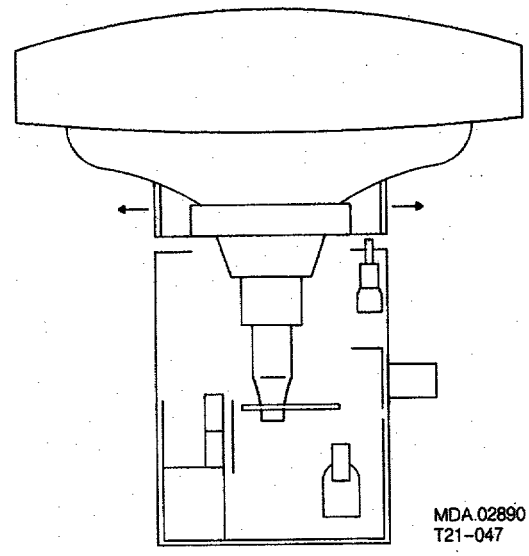

Fig. 4.2

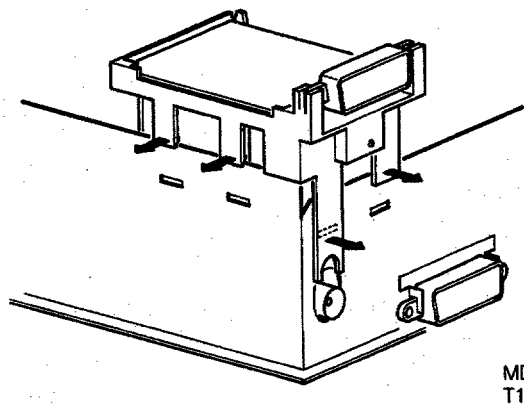

Fig. 4.3

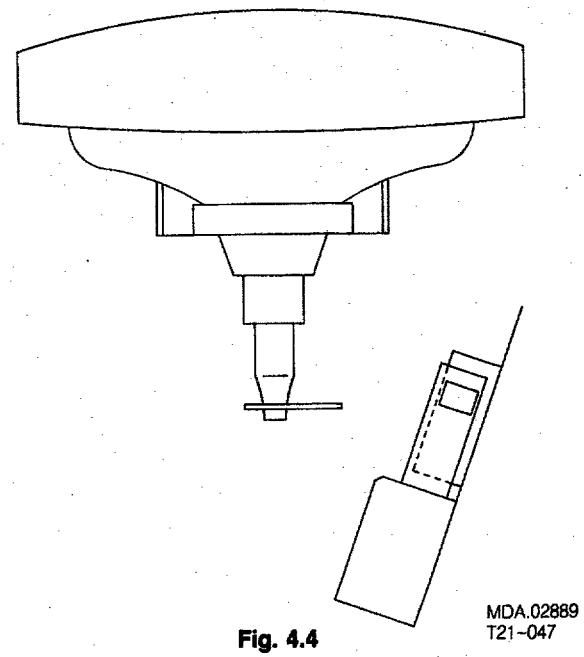

Fig. 4.4

Warnings

1. Safety regulations require that the unit should be returned in its original condition and that components identical to the original components are used. The safety components are indicated by the symbol ⚠.

2. In order to prevent damage to ICs and transistors, all high-voltage flashovers must be avoided. In order to prevent damage to the picture tube, it should be discharged using the method shown in Fig.3.1. Use a high-voltage probe and a multimeter (position DC-V). Discharge until the meter reading is OV (after approx. 30s).

3. ESD

   All ICs and many other semiconductors are sensitive to electrostatic discharges (ESD). Careless handling during repair can drastically shorten their life. Make sure that during repair you are connected by a pulse band with resistance to the same potential as the earth of the unit. Keep components and tools also at this same potential.

4. When repairing a unit, always connect it to the mains voltage via an isolating transformer.

5. Be careful when taking measurements in the high-voltage section and on the picture tube.

6. Never replace modules or other components while the unit is switched on.

7. It is recommended that safety goggles are worn when replacing the picture tube.

8. When making settings, use plastic rather than metal tools.
   This will prevent any short circuits and the danger of a circuit becoming unstable.

9. After repair the wiring should be fastened once more in the cable clamps for this purpose.

10. In order to prevent measuring errors, the heat sinks should not be used as reference points for measurements.
    The heat sink for the sound output amplifier (next to the channel selector) is connected to the -16 or -12 volts.

11. Together with the deflection unit and any multipole unit, the flat square picture tubes used form an integrated unit. The deflection and the multipole units are set optimally at the factory. Adjustment of this unit during repair is therefore not recommended.

12. The high-voltage cable in 21" units is glued in the line output transformer. This can therefore not be replaced.

Notes

1. The cold chassis direct voltages and oscillograms should be measured with regard to the tuner earth (⊥). Voltages on the line mains side of the SOPS transformer 5625 should be measured with respect to (⏚).

2. The direct voltages and oscillograms given in the diagrams should be measured in the service default mode (see section 9). A colour bar signal, modulated on a picture carrier wave of 475.25 MHz, should be used as the video signal. A 1 kHz signal should be used for the sound (for all systems).

3. Where necessary, the oscillograms and direct voltages are measured with (⊓) and without aerial signal(⊼). Voltages in the power supply section are measured both for normal operation (⏻) and in standby (⏻). These values are indicated by means of the appropriate symbols.

4. The picture tube PCB has printed spark gaps. Each spark gap is connected between an electrode of the picture tube and the Aquadag coating.

5. The semiconductors indicated in the circuit diagram and in the parts lists are completely interchangeable per position with the semiconductors in the unit, irrespective of the type indication on these semiconductors.

6. The connectors used for the modules (board to board) are gold-plated and should only be replaced by the same type.

7. In the case of fault finding and/or repair to the teletext module, the accessibility of the circuit and the components can be increased by using extension cards.
   The order numbers of these extension cards are:
   * 6 times: 4822 395 30259
   * 8 times: 4822 214 31402

8. Both multisystem and single system units are mentioned in this documentation.
   The term multisystem unit is used to refer to a unit that is suitable for the reception of PAL BGI and SECAM BGLL' systems.
   A multi-system set for Eastern-Europa is suitable for the reception of the PAL/SECAM BGDK systems. The term single system unit is used to refer to all other units (such as PAL BG, PAL/SECAM BG and PAL I units).

9. Blackline units can be recognized by the thick, protected high-voltage cable. Non-blackline units have a thin, unprotected high-voltage cable.

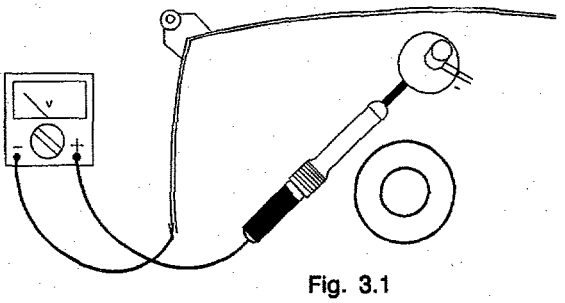

Fig. 3.1

Oscillogrammes / Oszillogramme / Oscillogrammes



TP 1
0,2 V/div AC
20 µS/div



TP 8
50 mV/div AC
10 µS/div



TP 14 ⏱
0,2 V/div DC
0,5 mS/div



TP 21
0,5 V/div DC
5 µS/div



TP 26 ⏱
0,1 V/div AC
5 mS/div



TP 2
0,2 V/div AC
20 µS/div



TP 9
0,5 V/div AC
10 µS/div



TP 15
1 V/div AC
0,2 mS/div



TP 21 ⏱
0,5 V/div DC
10 µS/div



TP 27
1 V/div DC



TP 3
0,2 V/div AC
10 µS/div



TP 10
0,5 V/div AC
10 µS/div



TP 16
1 V/div DC
0,1 mS/div



TP 22
1 V/div DC



TP 27 ⏱
50 mV/div AC
10 mS/div



TP 4
0,2 V/div AC
10 µS/div



TP 11
0,5 V/div AC
10 µS/div



TP 17
1 V/div DC
20 mS/div



TP 23
1 V/div DC



TP 28
0,5 V/div AC
5 µS/div



TP 5
0,1 V/div AC
10 µS/div



TP 12
1 V/div AC
10 µS/div



TP 18
2 V/div DC
20 mS/div



TP 24
5V/div DC



TP 28 ⏱
1 /div AC
10 mS/div



TP 6
0,2 V/div AC
10 µS/div



TP 13
1 V/div DC
1 S/div



TP 19
50 mV/div AC
10 µS/div



TP 25
0,2 V/div AC
5 µS/div



TP 29
0,5 V/div AC
5 µS/div



TP 7
0,2 V/div AC
10 µS/div



TP 14
1 V/div DC
0,5 mS/div



TP 20
0,5 V/div AC
10 µS/div



TP 26
1 V/div DC



TP 29 ⏱
1 V/div AC
10 mS/div

Oscillogrammes / Oszillogramme / Oscillogrammes



TP 30
2 V/div DC
5 µS/div



TP 36
0,2 V/div AC
5 mS/div



TP 41 b
5 V/div AC
5 mS/div



TP 30 ⏱
1 V/div DC
10 mS/div



TP 37
2 V/div AC
20 µS/div



TP 41 c
0,1 V/div AC
5 mS/div



TP 31
2 V/div DC
20 µS/div



TP 38
20 mV/div AC
20 µS/div

TP 41 d
5 V/div AC
5 mS/div



TP 32
50 mV/div DC
0,2 mS/div



TP 39
0,2 V/div AC
20 µS/div



TP 51
130 V_{pp}
115 V_{pp} for 21"



TP 33
2 V/div DC
0,2 mS/div



TP 40
0,5 V/div AC
20 µS/div



TP 52
120 V_{pp}
115 V_{pp} for 21"



TP 34
2 V/div DC
20 µS/div



TP 41
2 V/div AC
5 mS/div



TP 53
120 V_{pp}
110 V_{pp} for 21"



TP 35
50 mV/div DC
0,2 mS/div



TP 41 a
5 V/div AC
5 mS/div

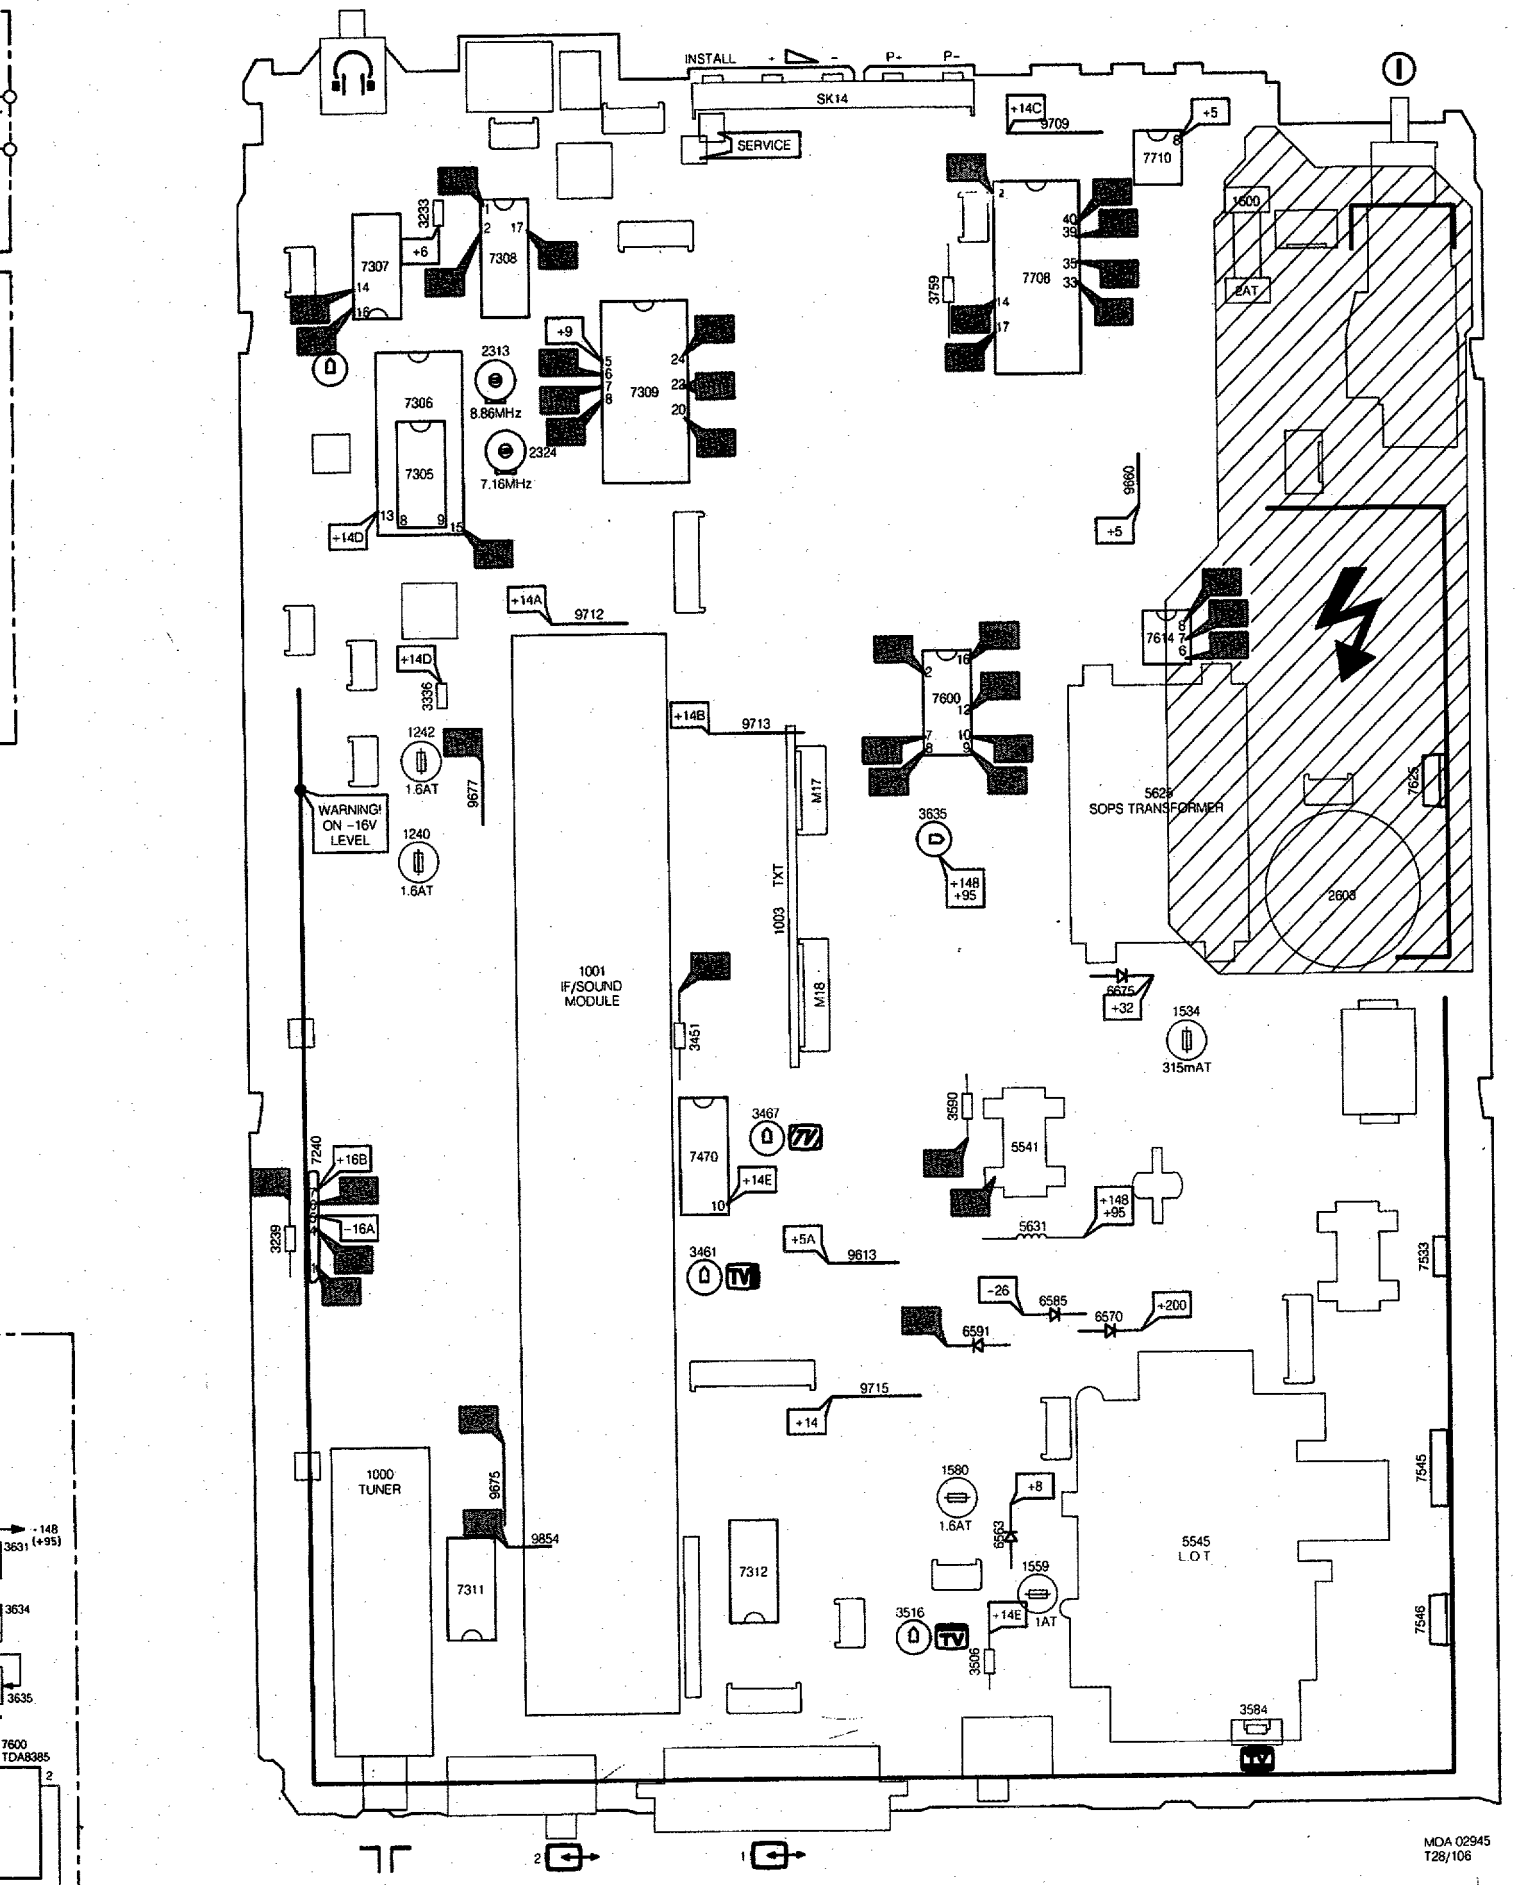
INSTALL
SK14
SERVICE
P+
P-
+14C
9709
+5
7710
1500
BAT
7307
+6
3233
7308
3759
7708
+9
7309
2313
8.86MHz
2324
7.16MHz
7306
7305
+14D
9660
+14A
9712
3336
1242
1.6AT
9677
WARNING!
ON -16V
LEVEL
1240
1.6AT
+14B
9713
7600
7614
5625
SOPS TRANSFORMER
2608
7625
M17
M18
1003 TXT
3635
+14B
+9S
1001
IF/SOUND
MODULE
3451
6675
+32
1534
315mAT
3467
7470
+14E
3590
5541
+14B
+9S
5631
7240
+16B
-16A
3239
3461
+5A
9613
-26
6585
6570
+200
6591
7533
9715
+14
1000
TUNER
9675
9854
7311
7312
1580
1.6AT
+8
6563
1559
1AT
3516
+14E
3506
5545
L.O.T
7545
7546
3584
2
1
MDA 02945
T28/106

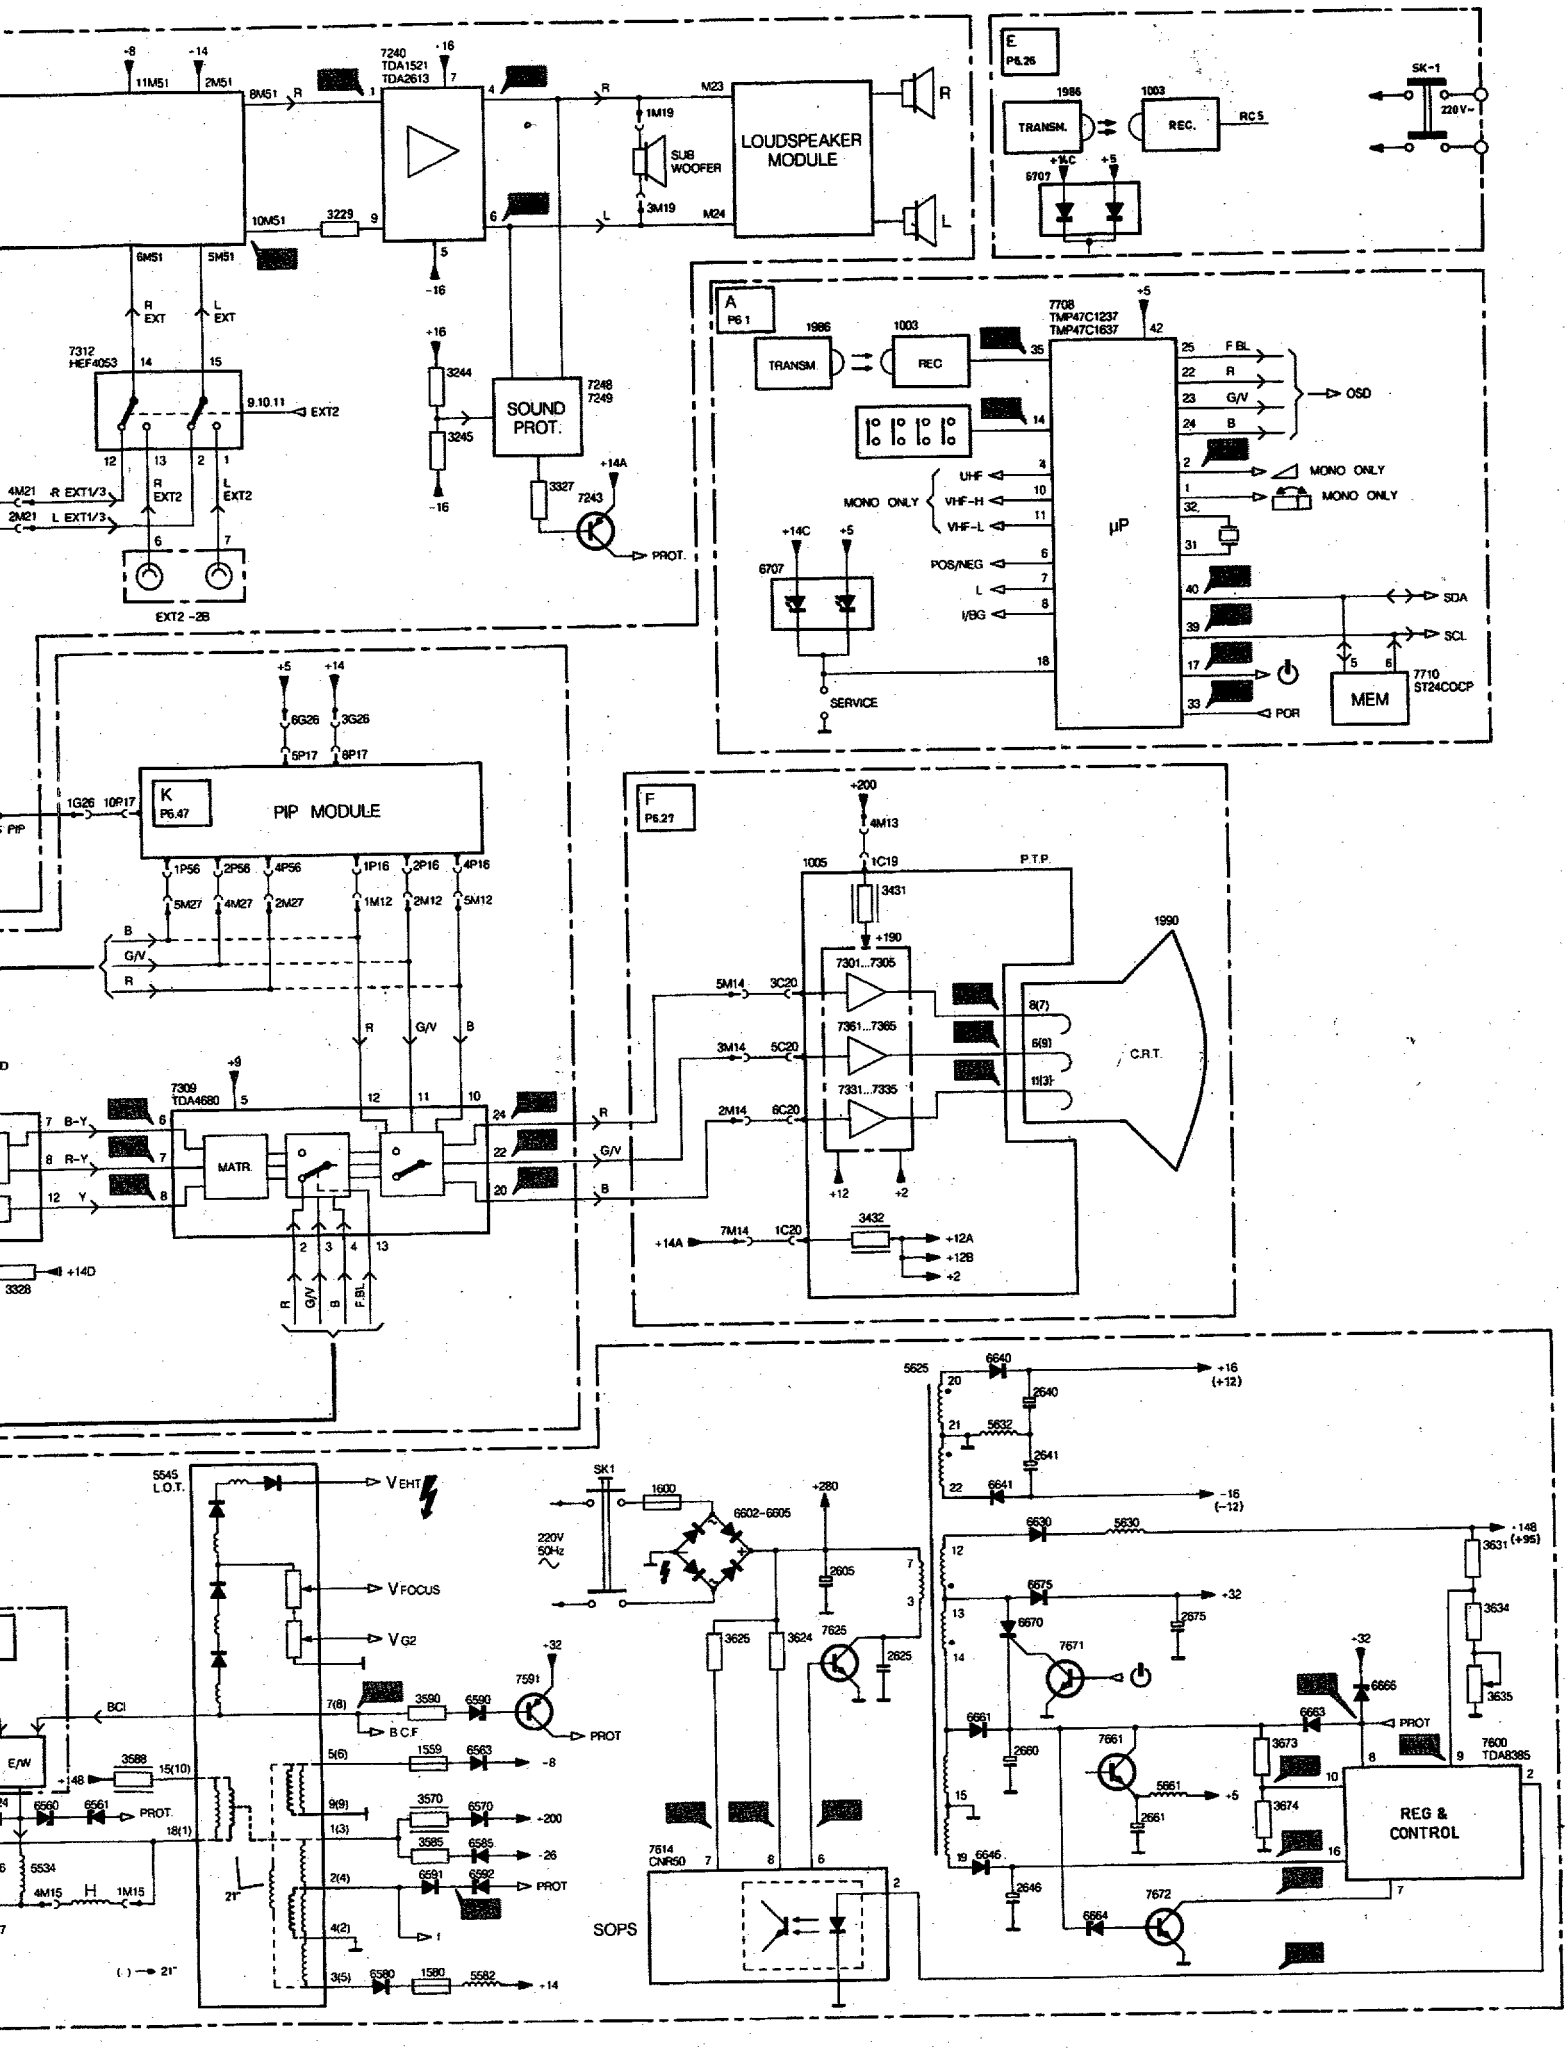
LOUDSPEAKER MODULE
SUB WOOFER
SOUND PROT.
TRANSM.
REC.
RC5
SK-1
220V~
μP
OSD
MONO ONLY
SDA
SCL
MEM
SERVICE
POR
PIP MODULE
MATR.
C.R.T.
P.T.P.
REG & CONTROL
SOPS
PROT.
VEHT
VFOCUS
VG2
B.C.I
B.C.F

Blockdiagram / Blockschaltbild / Schéma-bloc

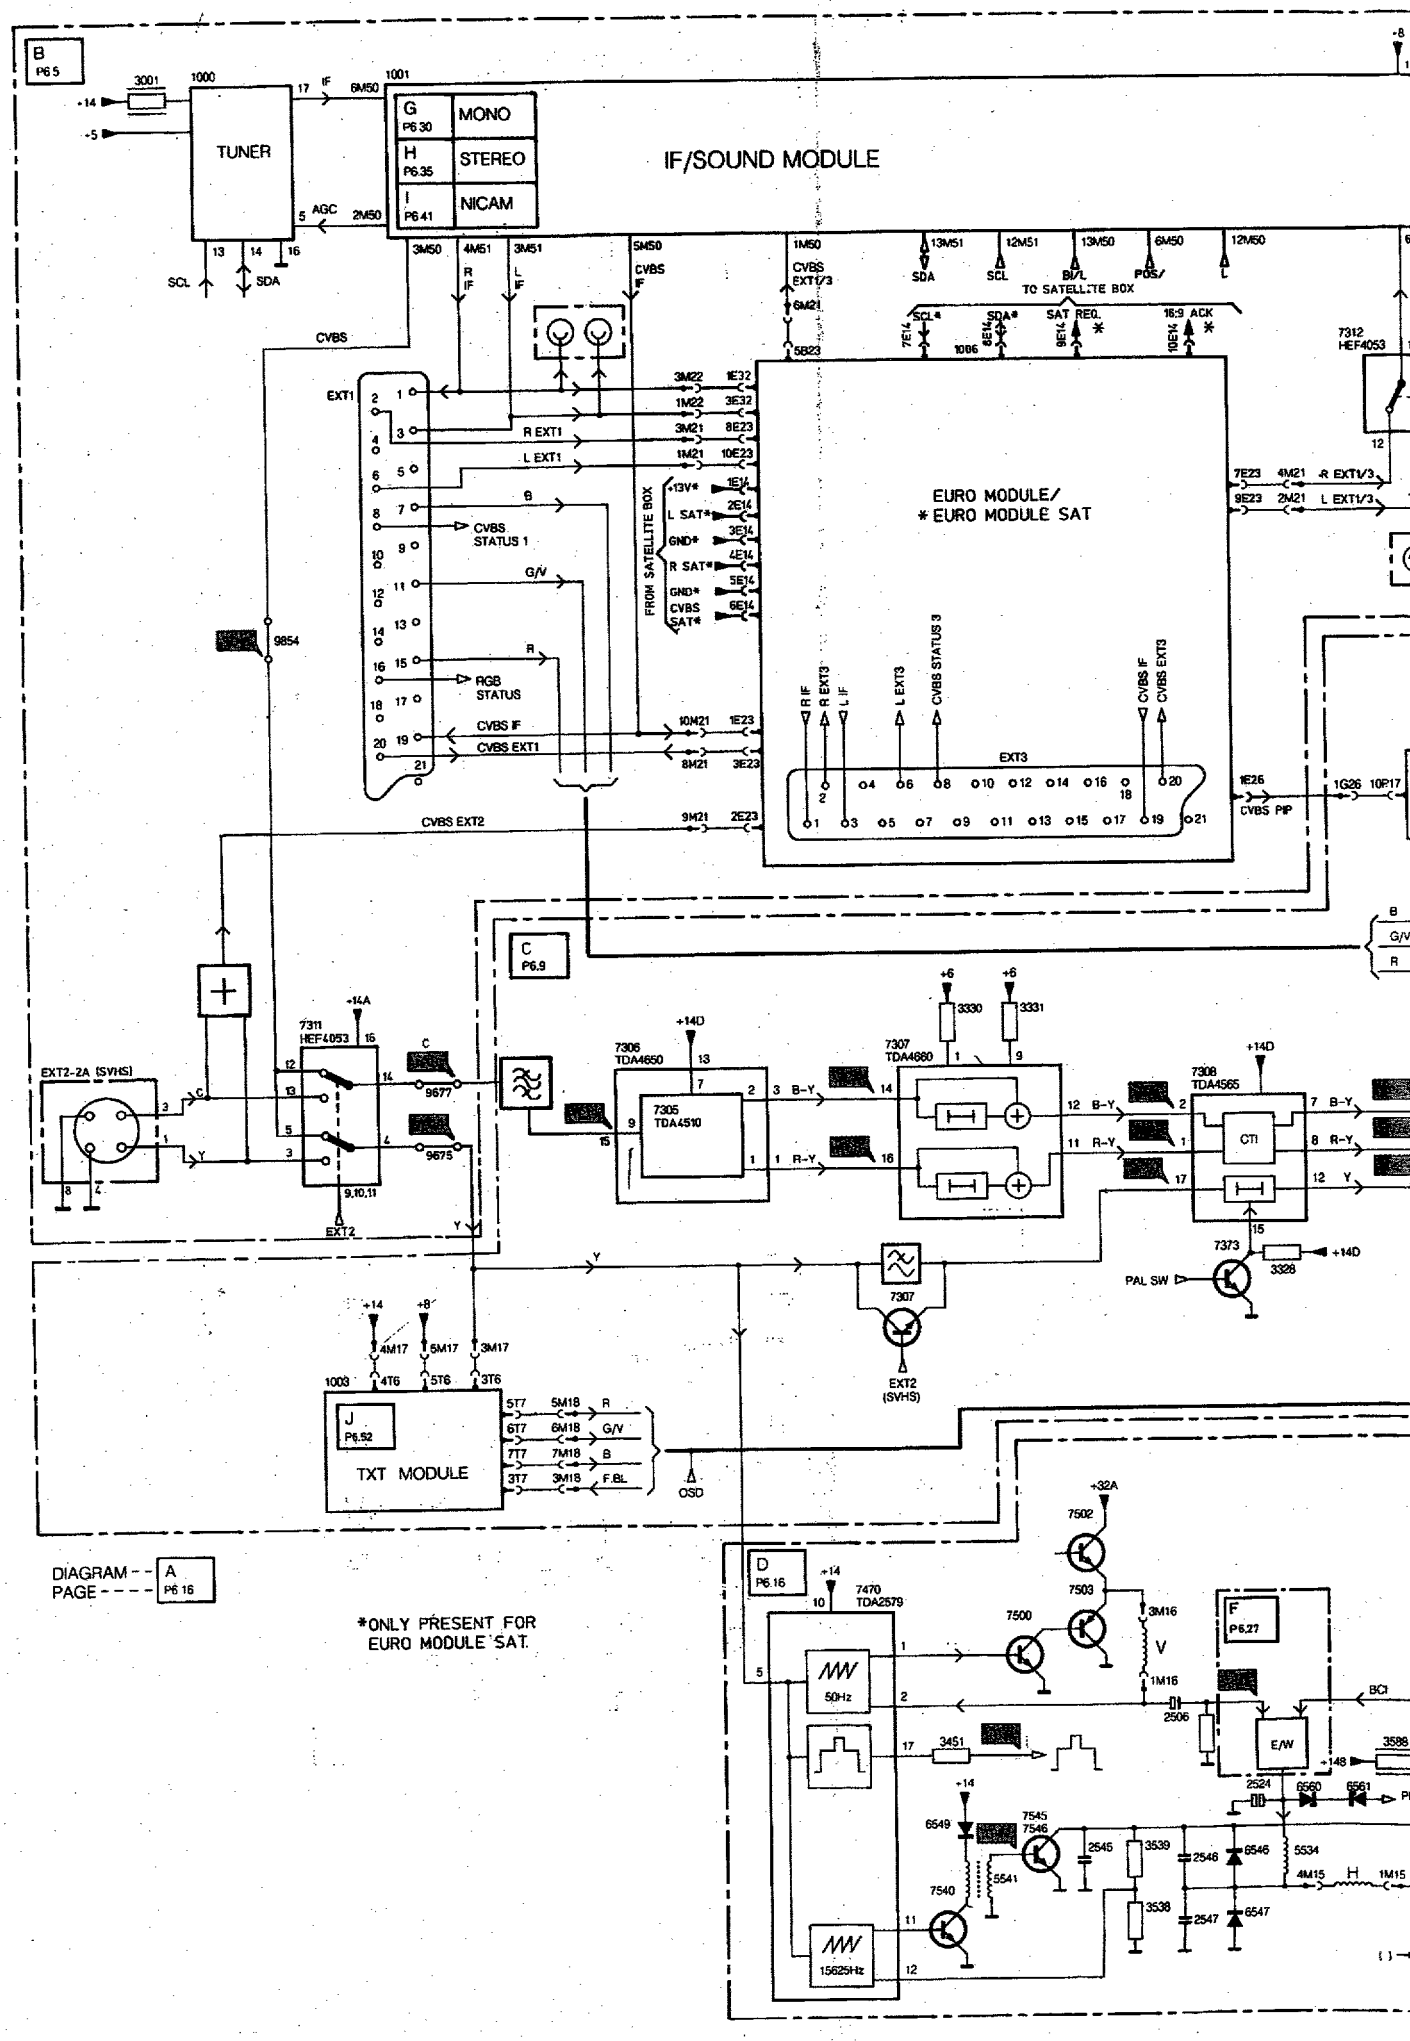

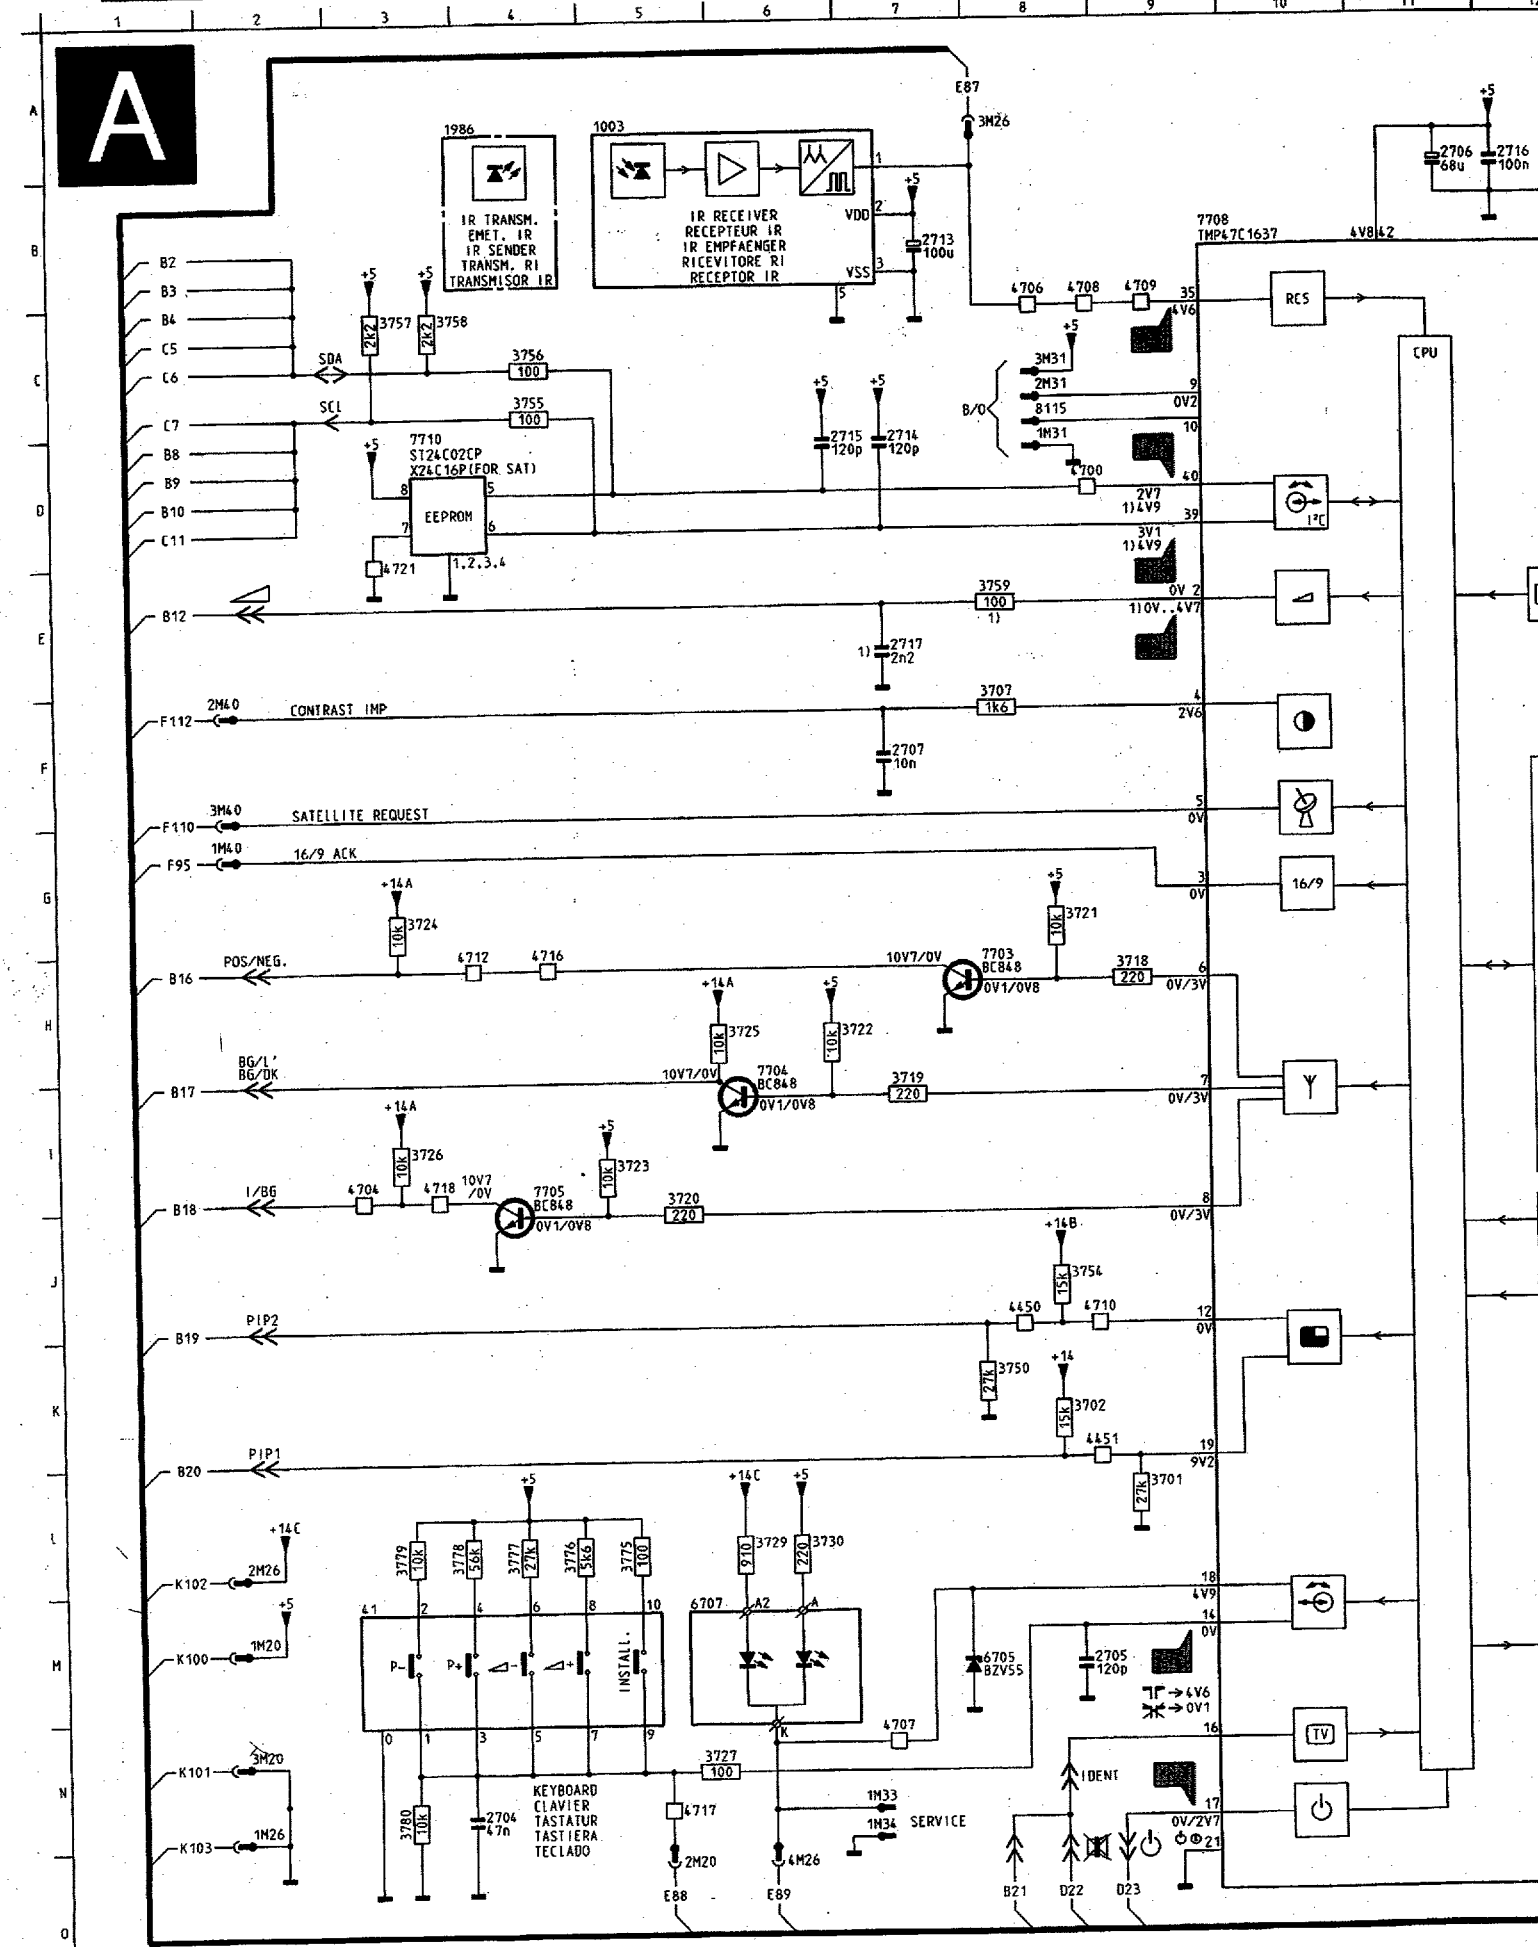
A
IR TRANSM.
EMET. IR
IR SENDER
TRANSM. RI
TRANSMISOR IR
IR RECEIVER
RECEPTEUR IR
IR EMPFAENGER
RICEVITORE RI
RECEPTOR IR
7708
TMP47C1637
CPU
RCS
I²C
7710
ST24C02CP
X24C16P(FOR SAT)
EEPROM
CONTRAST IMP
SATELLITE REQUEST
16/9 ACK
POS./NEG.
BG/L'
BG/DK
I/BG
PIP2
PIP1
SDA
SCL
B/O
IDENT
SERVICE
TV
KEYBOARD
CLAVIER
TASTATUR
TASTIERA
TECLADO
INSTALL.

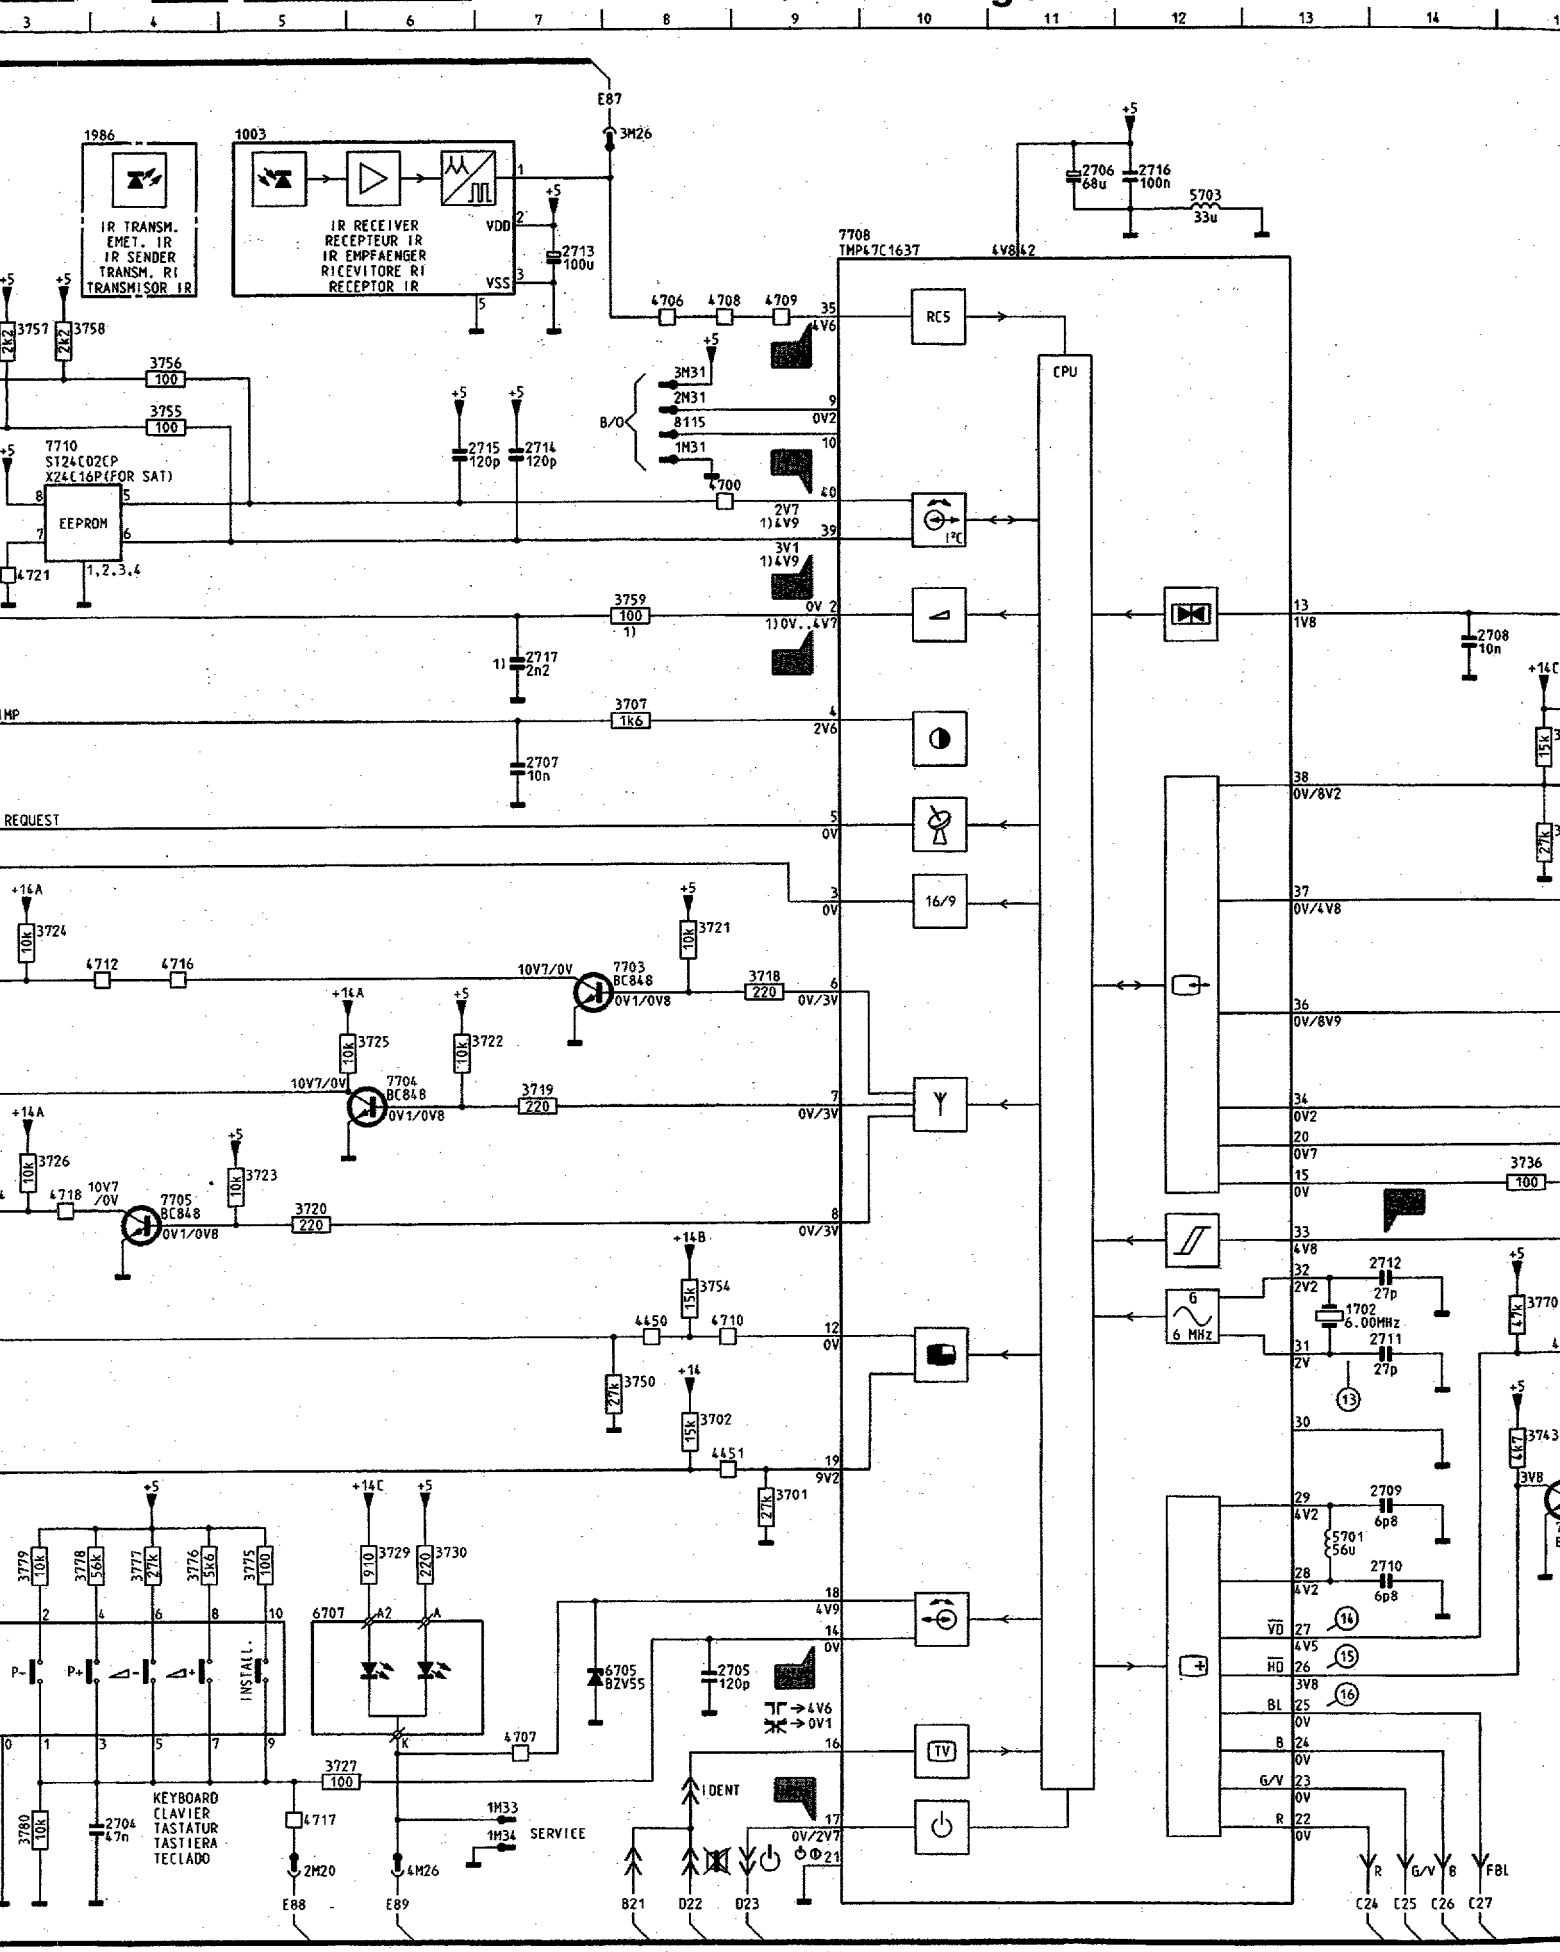
1986
IR TRANSM.
EMET. IR
IR SENDER
TRANSM. RI
TRANSMISOR IR
1003
IR RECEIVER
RECEPTEUR IR
IR EMPFAENGER
RICEVITORE RI
RECEPTOR IR
VDD
VSS
E87
3M26
2713 100u
7708
TMP47C1637
4V8/42
RC5
CPU
2706 68u
2716 100n
5703 33u
4706 4708 4709
3757 2k2
3758 2k2
3756 100
3755 100
7710
ST24C02CP
X24C16P(FOR SAT)
EEPROM
4721
1,2,3,4
2715 120p
2714 120p
3M31
2M31
8115
1M31
4700
B/O
2V7
3V1
3759 100
2717 2n2
3707 1k6
2707 10n
2708 10n
REQUEST
16/9
3724 10k
3721 10k
4712
4716
10V7/0V
7703 BC848
0V1/0V8
3718 220
3725 10k
3722 10k
7704 BC848
3719 220
3726 10k
4718
10V7 /0V
7705 BC848
3723 10k
3720 220
3754 15k
4710
4450
3750 27k
3702 15k
4451
3701 27k
3736 100
2712 27p
1702 6.00MHz
2711 27p
3770 4k7
3743 4k7
2709 6p8
5701 56u
2710 6p8
3779 10k
3778 56k
3777 27k
3776 56k
3775 100
P-
P+
INSTALL.
6707
3729 910
3730 220
6705 BZV55
2705 120p
4707
3727 100
3780 10k
2704 47n
KEYBOARD
CLAVIER
TASTATUR
TASTIERA
TECLADO
4717
2M20
4M26
1M33
1M34
SERVICE
IDENT
E88
E89
B21
D22
D23
R
G/V
B
FBL
C24
C25
C26
C27

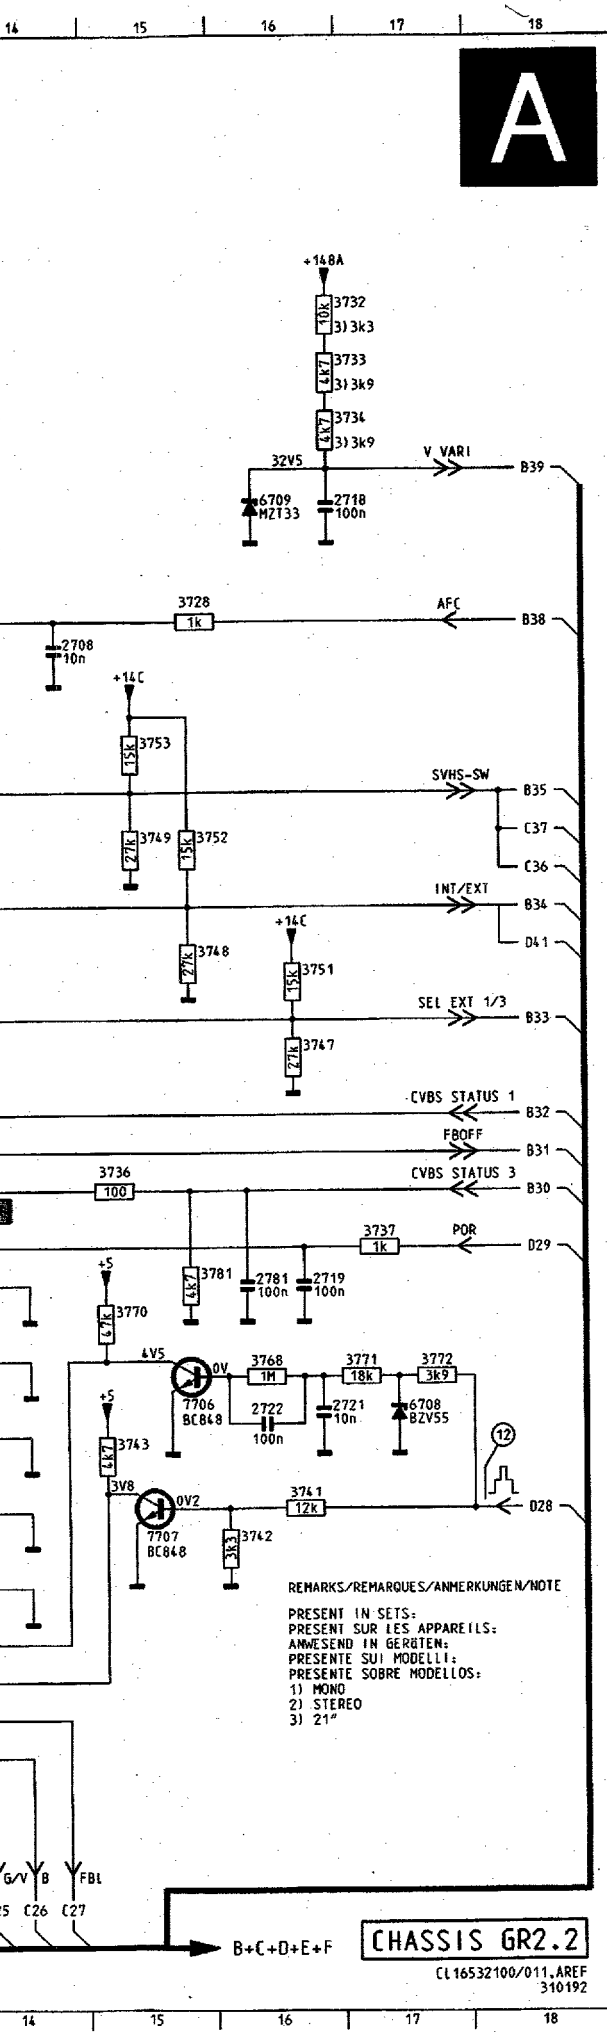

	1003	A 5
	1702	J13
	1986	A 3
	2M31	C 9
A	2704	N 4
	2705	M 8
	2706	A11
	2707	F 7
	2708	E14
	2709	L14
	2710	L14
	2711	K14
B	2712	J14
	2713	B 7
	2714	D 7
	2715	D 6
	2716	A12
	2717	E 7
	2718	D16
	2719	J16
C	2721	K16
	2722	K16
	2781	J16
	3701	L 9
	3702	K 8
	3707	F 8
	3718	H 9
D	3719	I 7
	3720	I 5
	3721	G 8
	3722	H 6
	3723	I 5
	3724	G 3
	3725	H 6
	3726	I 3
E	3727	N 5
	3728	E15
	3729	L 6
	3730	L 6
	3732	B16
	3733	C16
	3734	C16
	3736	I 5
F	3737	J17
	3741	L16
	3742	L16
	3743	K15
	3747	H16
	3748	G15
	3749	F15
G	3750	K 8
	3751	H16
	3752	F15
	3753	F15
	3754	J 8
	3755	C 4
	3756	C 4
	3757	C 3
H	3758	C 3
	3759	E 8
	3768	K16
	3770	J15
	3771	K17
	3772	K17
	3775	L 5
	3776	L 4
I	3777	L 4
	3778	L 3
	3779	L 3
	3780	N 3
	3781	J15
	41	M 3
	4450	J 8
J	4451	K 8
	4700	D 8
	4704	I 3
	4706	B 8
	4707	N 7
	4708	B 8
	4709	B 9
K	4710	J 8
	4712	H 4
	4716	H 4
	4717	N 5
	4718	I 3
	4721	E 3
	5701	L13
L	5703	B12
	6705	M 7
	6707	M 5
	6708	K17
	6709	D16
	7703	H 8
	7704	I 6
	7705	I 4
M	7706	K15
	7707	L15
	7708	B 9
	7710	D 3
	8115	F 9
N		
O		



TP 12
1 V/div AC
10 µS/div



TP 15
1 V/div AC
0,2 mS/div



⑫
2 V/div AC
20 µS/div



TP 13
1 V/div DC
1 S/div



TP 16
1 V/div DC
0,1 mS/div



⑬
1 V/div AC
0,5 µS/div



TP 14
1 V/div DC
0,5 mS/div



TP 17
1 V/div DC
20 mS/div



⑭
1 V/div AC
5 mS/div



TP 14 ⏻
0,2 V/div DC
0,5 mS/div



TP 18
2 V/div DC
20 mS/div



⑮
1 V/div AC
20 µS/div



⑯
0,5 V/div AC
5 mS/div



⑯
1 V/div AC
10 µS/div

Euro module (ECO)
Euro-AV-Platte (ECO)
Module Prise Péritélévision (ECO)

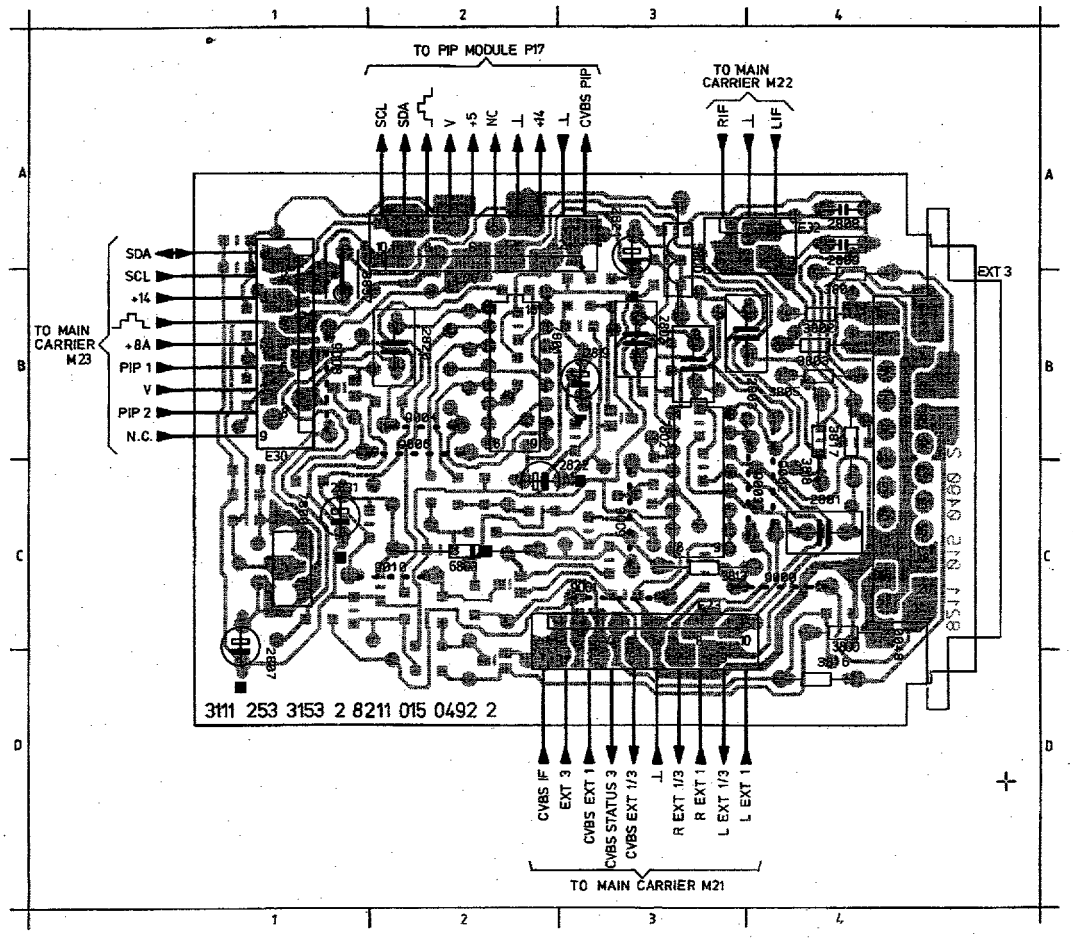

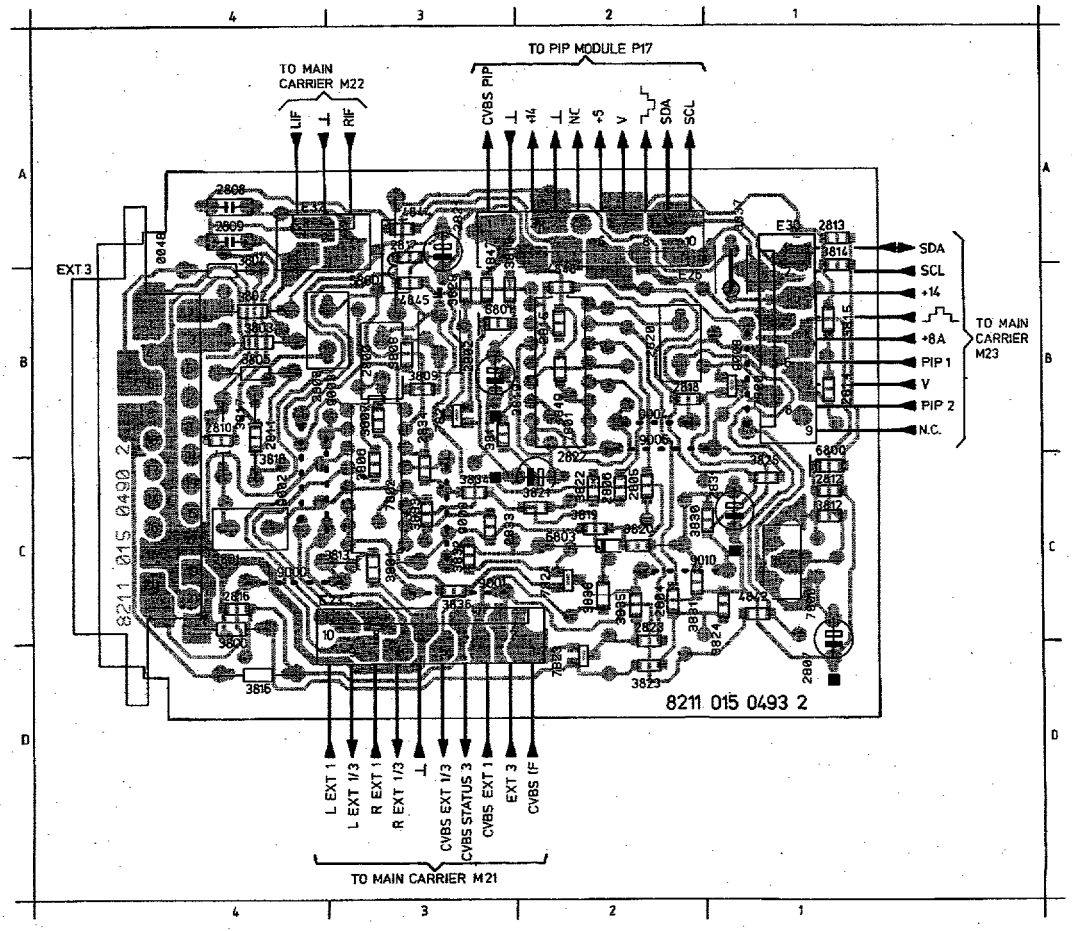

E23 D3
E26 A2
E30 B1
E32 A3
0048 C4
2800 B3
2801 C4
2802 B3
2803 B4
2804 D2
2805 C2
2806 C2
2807 D1
2808 A4
2809 B4
2810 C4
2811 C4
2812 C1
2813 B1
2814 B1
2815 B2
2816 D4
2817 B3
2818 C2
2819 B3
2820 B2
2821 B3
2822 C2
2823 D2
2831 C1
2833 C3
2834 C3
3800 D4
3801 C3
3802 B4
3803 B4
3804 B4
3805 B4
3806 C3
3807 C3
3808 B3
3809 B3
3810 B3
3811 C3
3812 C1
3813 C3
3815 B1
3816 D4
3817 C4
3818 C4
3819 C2
3820 C2
3821 C2
3822 C2
3823 D2
3824 D1
3825 C1
3829 B3
3830 C2
3831 C2
3832 C3
3833 C3
3834 C3
3835 D2
3836 D3
3837 B1
3838 D2
4800 A4
4842 D1
4844 B3
4845 B3
4847 B3
4848 B2
4849 B2
5800 B3
6800 C1
6801 B3
6803 C2
7800 C1
7801 B2
7802 C3
7820 B1
7821 C3
7823 D2
7824 C2
9000 C4
9001 D3
9002 C4
9003 C4
9004 C2
9006 C2
9008 B1
9009 C3
9010 C2

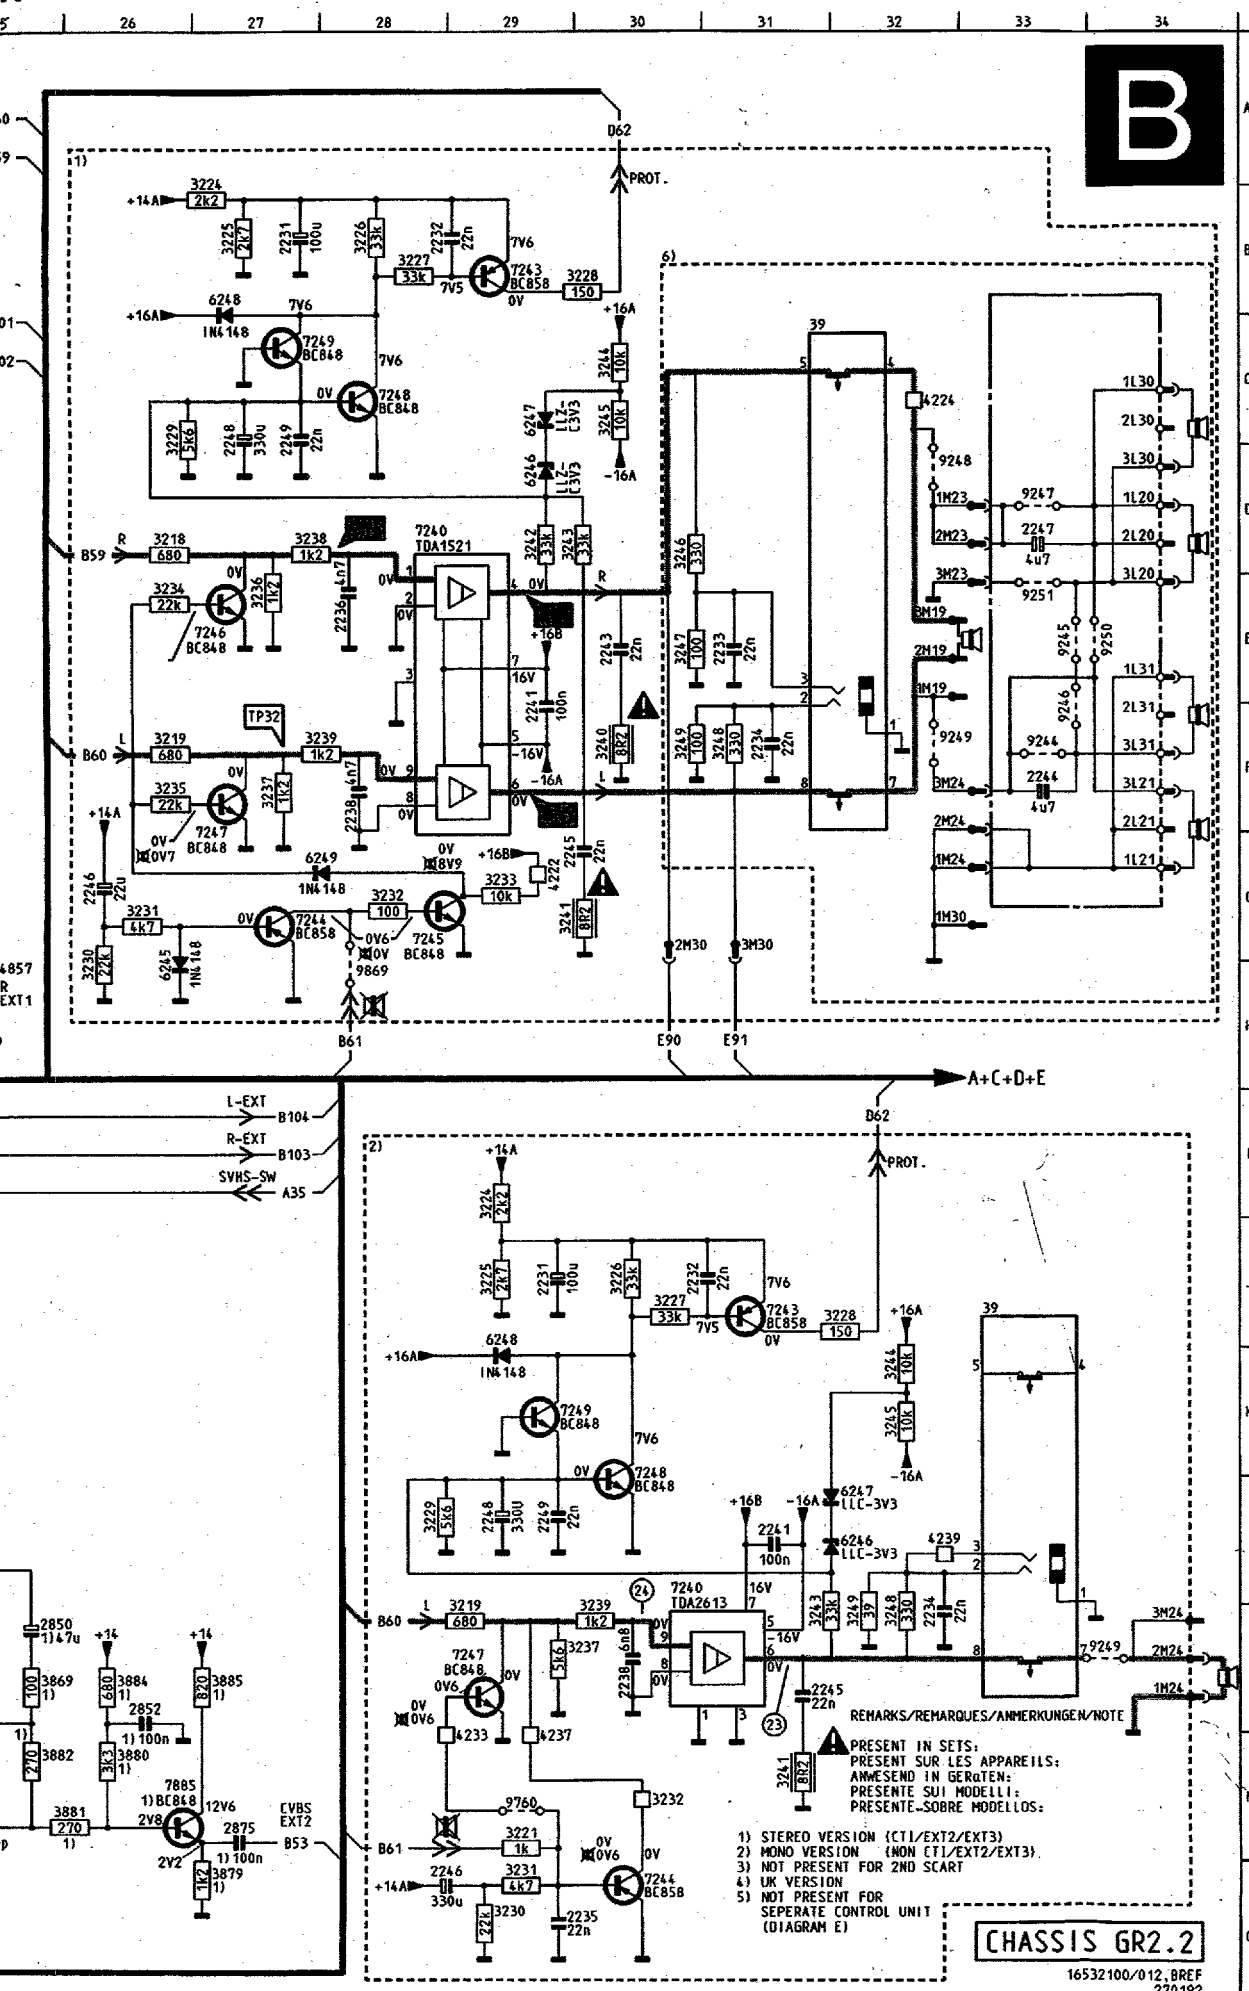

1000	C 1	3258	I21	
1240	I 3	3259	I21	
1242	H 3	3260	I21	
2001	B 1	3261	D24	
2002	F 2	3262	D24	A
2003	G 3	3263	K20	
2004	D 4	3264	L20	
2008	G 4	3265	H22	
2010	G 4	3266	H25	
2230	F 1	3267	I23	
2231	J29	3268	I23	
2231	B27	3386	C20	
2232	J30	3850	E21	B
2232	B28	3851	G22	
2233	E31	3852	G22	
2234	M32	3853	G23	
2234	F31	3854	G23	
2235	O29	3855	H21	
2236	E28	3856	E21	
2237	J 4	3857	E21	
2238	M30	3858	D21	C
2238	F28	3859	D21	
2239	I 5	3860	G21	
2240	J 4	3861	O21	
2241	L31	3862	F21	
2241	F29	3866	J22	
2242	I 4	3867	O24	
2243	E30	3868	N25	D
2244	F33	3869	M25	
2245	M31	3870	N24	
2245	G29	3871	N22	
2246	O28	3872	F20	
2246	G26	3874	H20	
2247	D33	3879	O27	
2248	L29	3880	N26	
2248	C27	3881	N25	E
2249	L29	3882	N25	
2249	C27	3884	M26	
2250	D23	3885	M27	
2251	D25	3887	B21	
2252	I22	3888	F23	
2254	G23	3889	C21	
2255	G25	3890	D21	F
2256	H24	39	C31	
2257	H23	39	J33	
2262	M20	4222	G29	
2263	M21	4223	J 4	
2264	L21	4224	C32	
2265	L21	4233	N29	
2266	I23	4237	N29	
2850	M25	4239	L32	G
2851	N25	4850	O22	
2852	M26	4851	N23	
2853	C21	4853	K21	
2854	G21	4856	G22	
2875	N27	4857	H25	
3001	B 2	4858	J22	
3002	H 5	4859	J24	H
3003	F 2	4860	L21	
3010	F 4	4861	F 4	
3218	D26	4867	J24	
3219	M29	49	F21	
3219	F26	5001	G 3	
3220	H 4	5240	I 3	
3221	N29	5242	H 3	
3222	K 1	6245	H26	I
3224	I29	6246	L32	
3224	B27	6246	D29	
3225	J29	6247	L32	
3225	B27	6247	C29	
3226	J30	6248	B27	
3226	B28	6248	J29	
3227	J30	6249	G27	J
3227	B28	7003	G 3	
3228	J32	7240	L30	
3228	B30	7240	D28	
3229	I28	7243	J31	
3229	C26	7243	B29	
3230	O29	7244	D30	
3230	N26	7244	G27	
3231	O29	7245	G28	K
3231	G26	7246	E27	
3232	N30	7247	M29	
3232	G28	7247	F27	
3233	G29	7248	L30	
3234	E26	7248	C28	
3235	F26	7249	K29	
3236	E27	7249	C27	
3237	M29	7311	M22	L
3237	F27	7312	J22	
3238	D27	7850	C21	
3239	M30	7885	N26	
3239	F27	7886	F20	
3240	F30	9244	F33	
3241	N31	9245	E33	
3241	G29	9246	F33	M
3242	D29	9247	D33	
3243	D29	9248	D32	
3243	M31	9249	F32	
3244	C30	9249	M34	
3244	K32	9250	E34	
3245	C30	9251	E33	
3245	K32	9760	N29	N
3246	D30	9869	H28	
3247	E30			
3248	M32			
3248	F31			
3249	M32			
3249	F30			
3250	G24			
3251	G23			O
3253	F24			
3254	F24			
3255	L21			
3256	L21			
3257	I20			

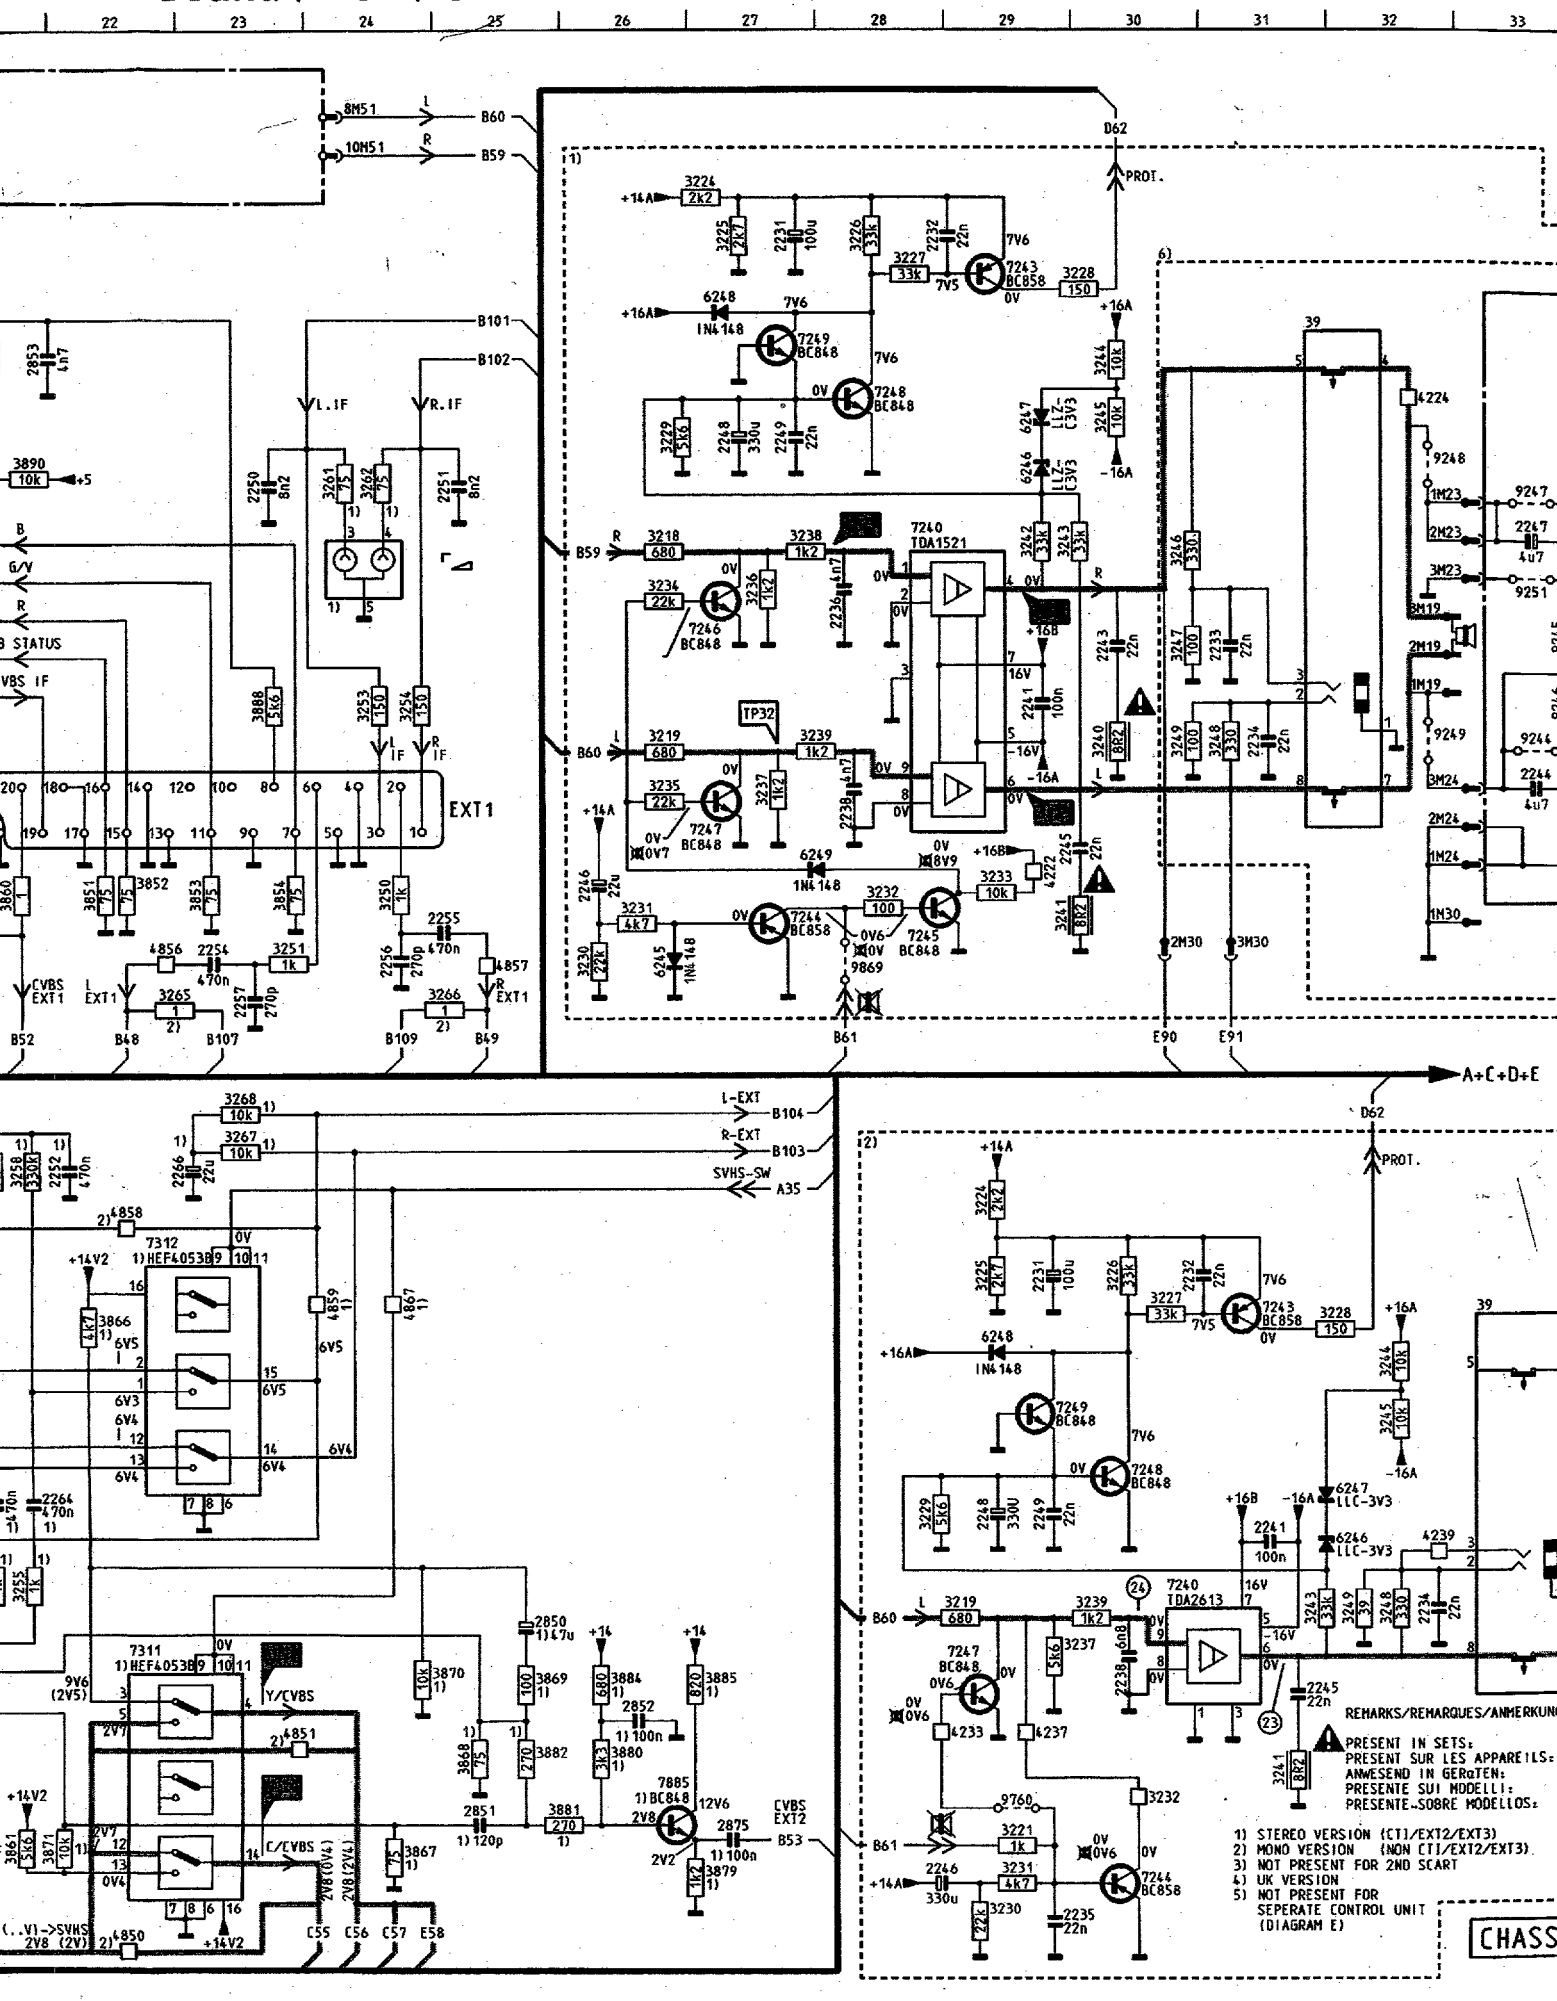
8M51
10M51
B60
B59
B101
B102
L.IF
R.IF
EXT1
CVBS EXT1
B52
B48
B107
B109
B49
B61
D62
PROT.
TDA1521
TDA2613
BC858
BC848
IN4148
LLC-3V3
E90
E91
A+C+D+E
L-EXT
R-EXT
SVHS-SW
B104
B103
A35
HEF4053B
Y/CVBS
C/CVBS
CVBS EXT2
B53
REMARKS/REMARQUES/ANMERKUNG
PRESENT IN SETS:
PRESENT SUR LES APPAREILS:
ANWESEND IN GERäTEN:
PRESENTE SUI MODELLI:
PRESENTE SOBRE MODELLOS:
1) STEREO VERSION (CTI/EXT2/EXT3)
2) MONO VERSION (NON CTI/EXT2/EXT3)
3) NOT PRESENT FOR 2ND SCART
4) UK VERSION
5) NOT PRESENT FOR SEPERATE CONTROL UNIT (DIAGRAM E)

IF / ZF / FI

IF/SOUND MODULE ZF/TON MODUL MODULE FI/SON MODULO IF/AUDIO MODULO SONIDO FI

G : MONO
H : STEREO/ESTEREO
I : NICAM

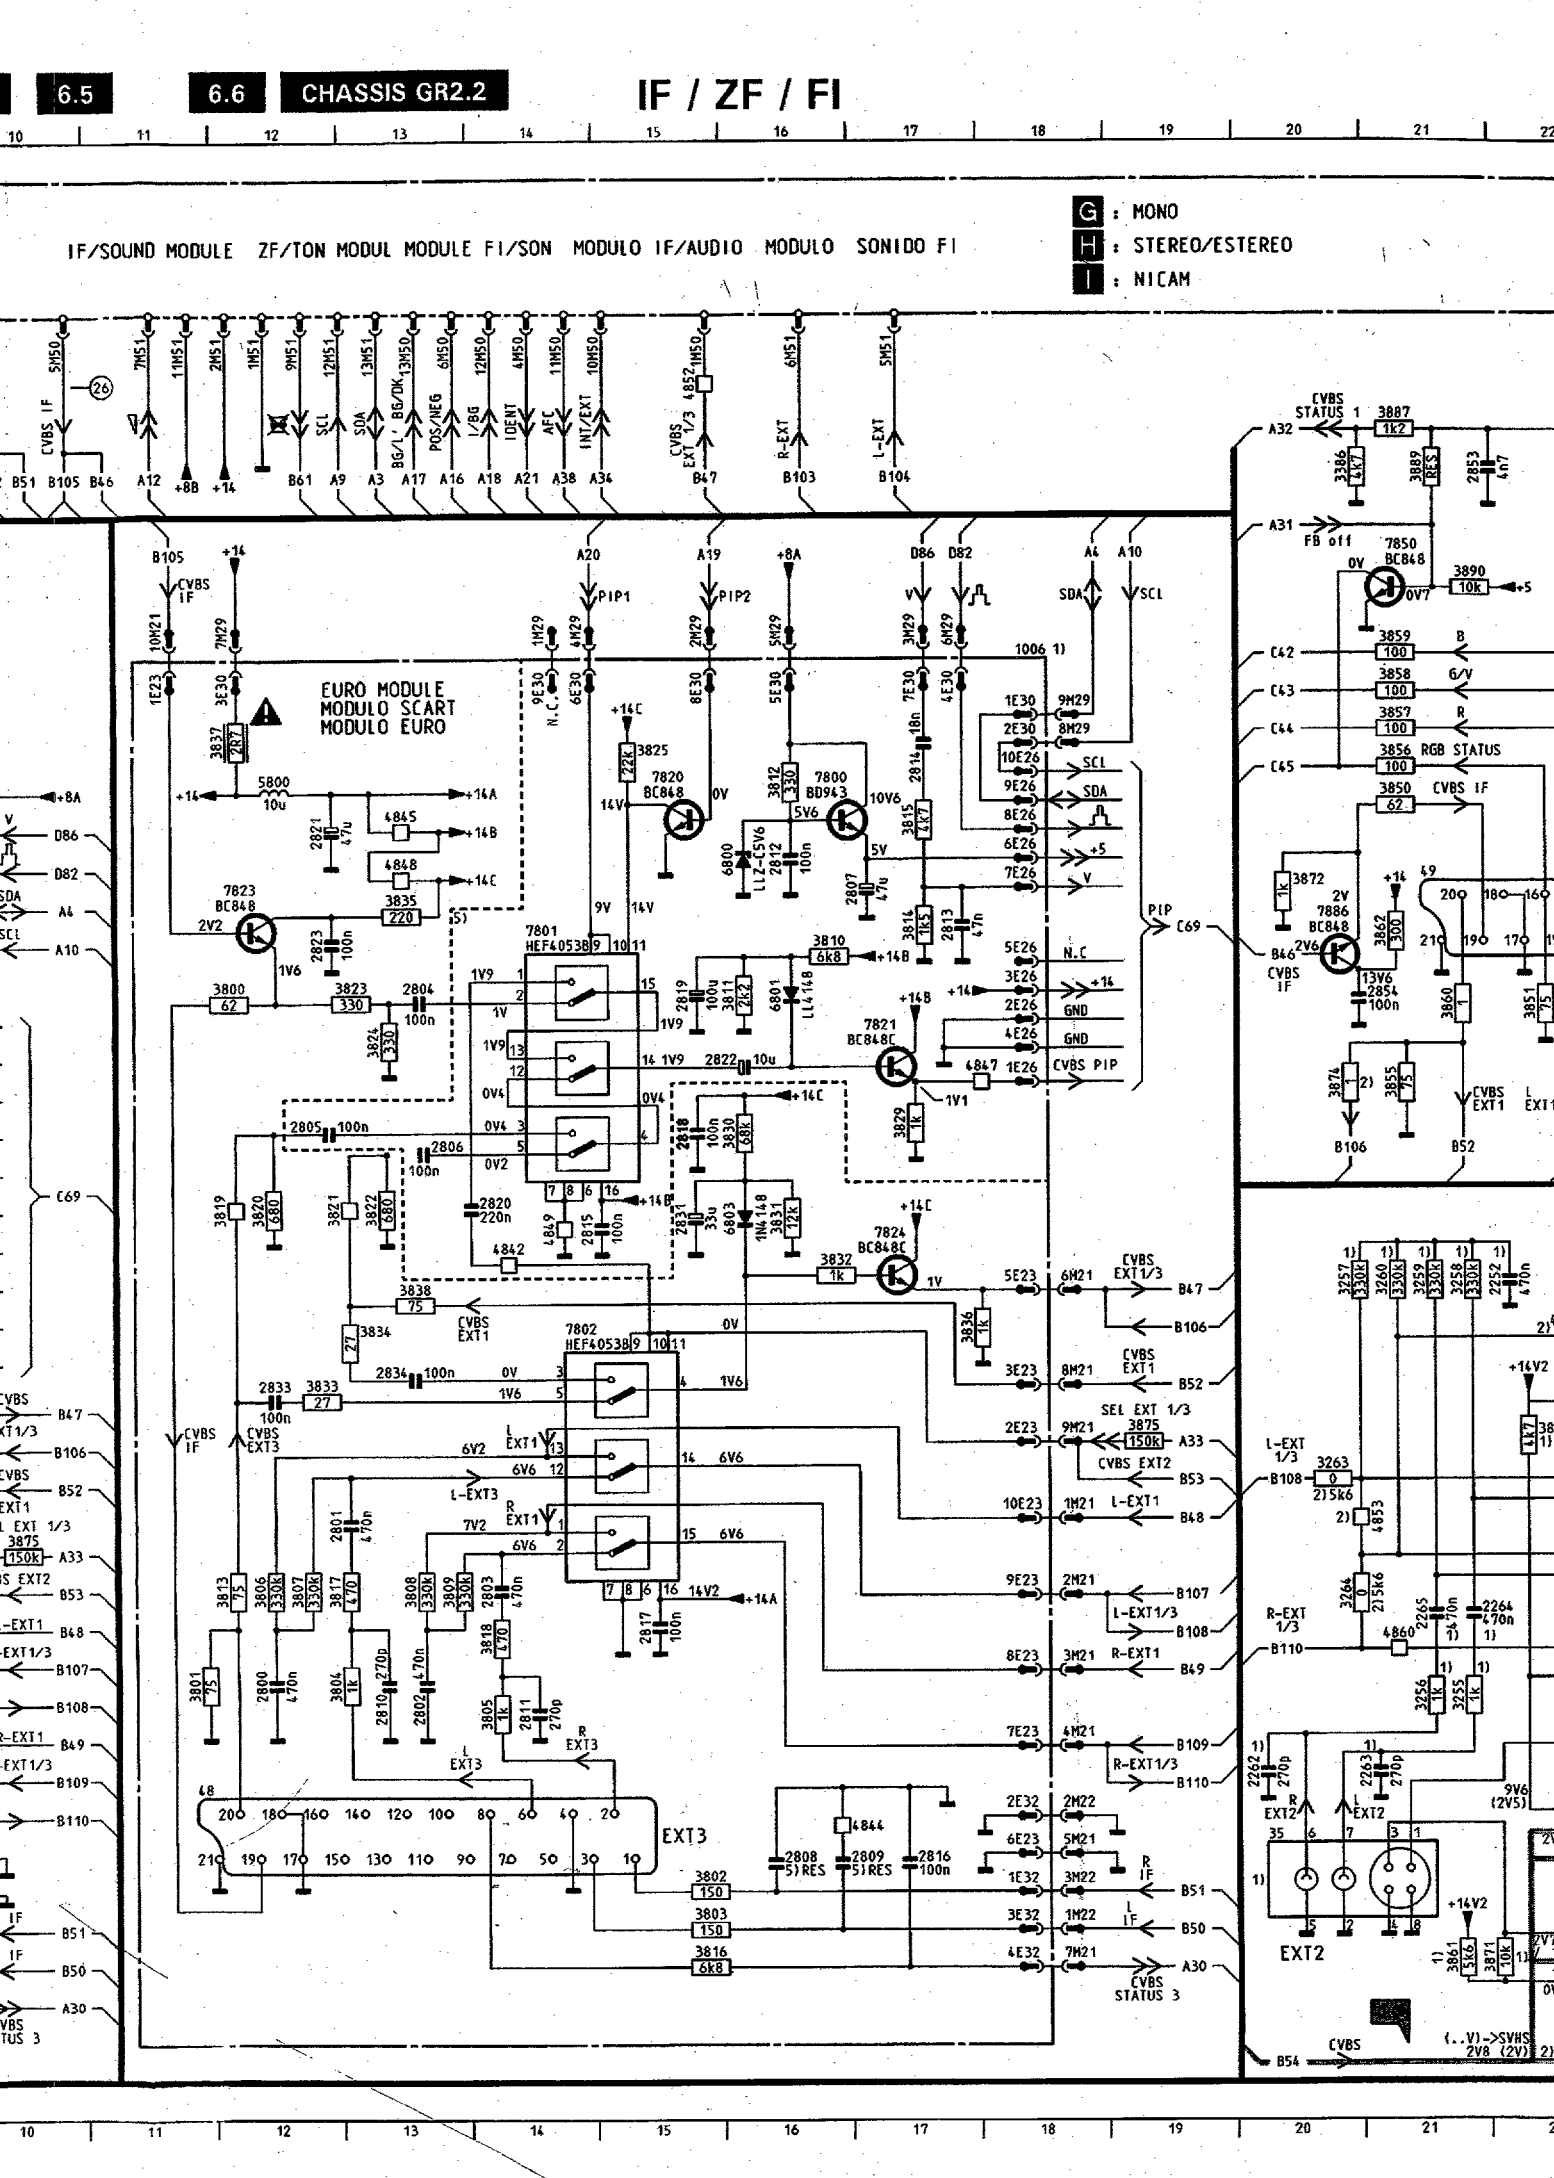

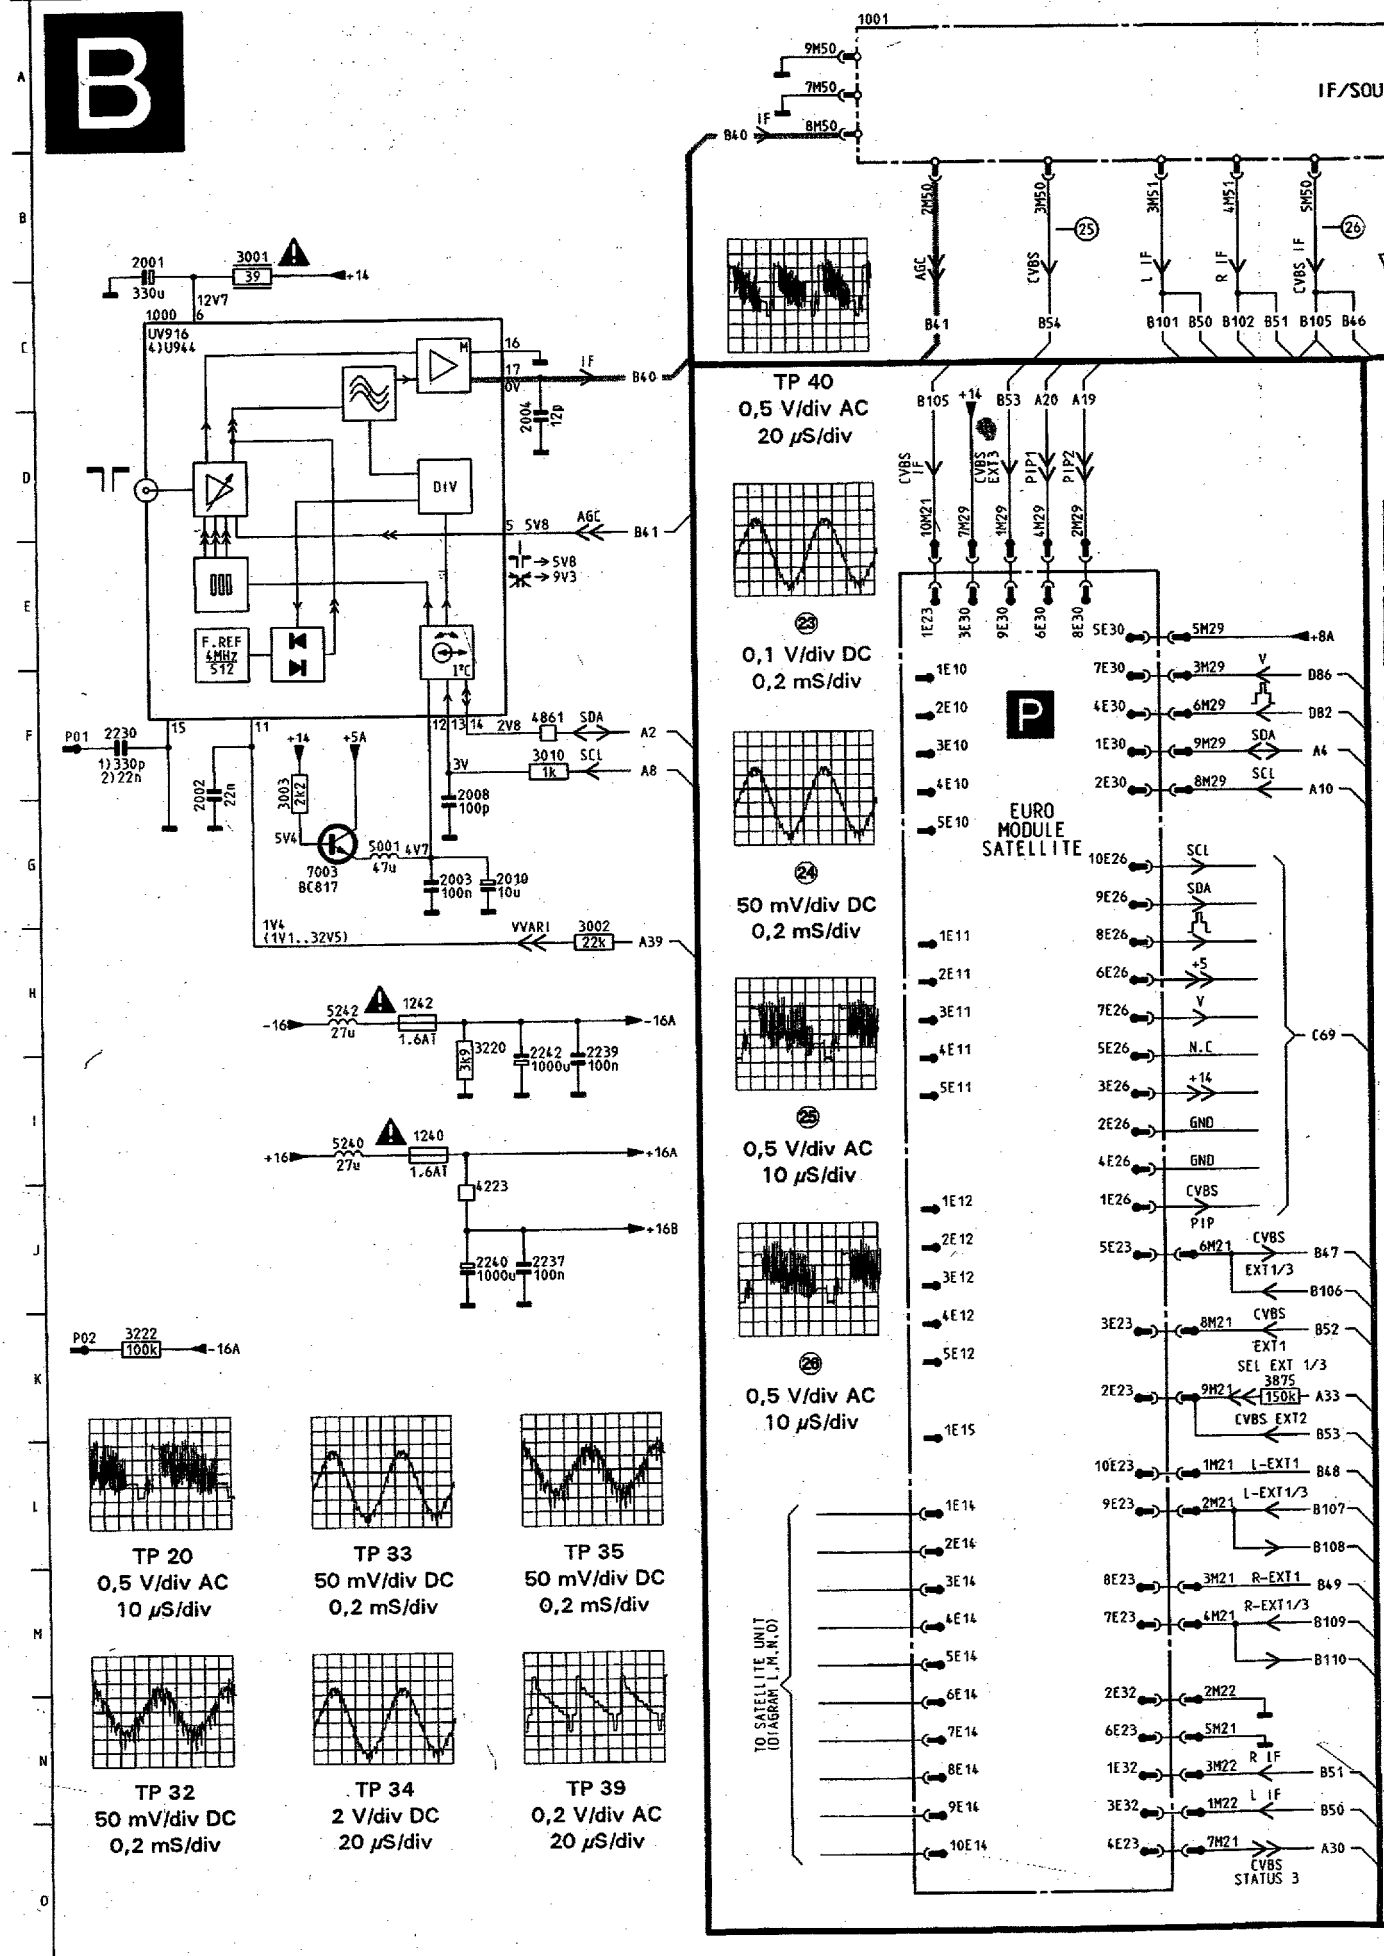
B
IF/SOU
1001
9M50
7M50
8M50
IF
B40
2M50
AGC
B41
3M50
CVBS
B54
25
3M51
L IF
B101 B50
4M51
R IF
B102 B51
5M50
CVBS IF
B105 B46
26
2001
330u
3001
39
+14
12V7
1000
UV916
4)U944
16
17
0V
IF
B40
2004
12p
DIV
5 5V8
AGC
B41
5V8
9V3
F.REF
4MHz
512
I²C
P01
2230
1) 330p
2) 22n
15
11
2002
22n
+14
+5A
3003
2k2
5V4
7003
BC817
5001
47u
4V7
2003
100n
2010
10u
12 13 14 2V8
4861
SDA
A2
3010
1k
SCL
A8
3V
2008
100p
1V4
(1V1..32V5)
VVARI
3002
22k
A39
-16
5242
27u
1242
1.6AT
-16A
3k9
3220
2242
1000u
2239
100n
+16
5240
27u
1240
1.6AT
+16A
4223
+16B
2240
1000u
2237
100n
P02
3222
100k
-16A
TP 20
0,5 V/div AC
10 µS/div
TP 33
50 mV/div DC
0,2 mS/div
TP 35
50 mV/div DC
0,2 mS/div
TP 32
50 mV/div DC
0,2 mS/div
TP 34
2 V/div DC
20 µS/div
TP 39
0,2 V/div AC
20 µS/div
TP 40
0,5 V/div AC
20 µS/div
23
0,1 V/div DC
0,2 mS/div
24
50 mV/div DC
0,2 mS/div
25
0,5 V/div AC
10 µS/div
26
0,5 V/div AC
10 µS/div
B105 +14 B53 A20 A19
CVBS IF
CVBS EXT3
PIP1
PIP2
10M21
2M29
1M29
4M29
2M29
1E23 3E30 9E30 6E30 8E30
P
EURO
MODULE
SATELLITE
1E10
2E10
3E10
4E10
5E10
1E11
2E11
3E11
4E11
5E11
1E12
2E12
3E12
4E12
5E12
1E15
1E14
2E14
3E14
4E14
5E14
6E14
7E14
8E14
9E14
10E14
TO SATELLITE UNIT
(DIAGRAM L,M,N,O)
5E30 5M29 +8A
7E30 3M29 V D86
4E30 6M29 D82
1E30 9M29 SDA A4
2E30 8M29 SCL A10
10E26 SCL
9E26 SDA
8E26
6E26 +5
7E26 V
5E26 N.C
3E26 +14
2E26 GND
4E26 GND
1E26 CVBS P1P
C69
5E23 6M21 CVBS EXT1/3 B47
B106
3E23 8M21 CVBS EXT1 B52
SEL EXT 1/3
2E23 9M21 3875 150k A33
CVBS EXT2 B53
10E23 1M21 L-EXT1 B48
9E23 2M21 L-EXT1/3 B107
B108
8E23 3M21 R-EXT1 B49
7E23 4M21 R-EXT1/3 B109
B110
2E32 2M22
6E23 5M21 R IF
1E32 3M22 B51
3E32 1M22 L IF B50
4E23 7M21 CVBS STATUS 3 A30

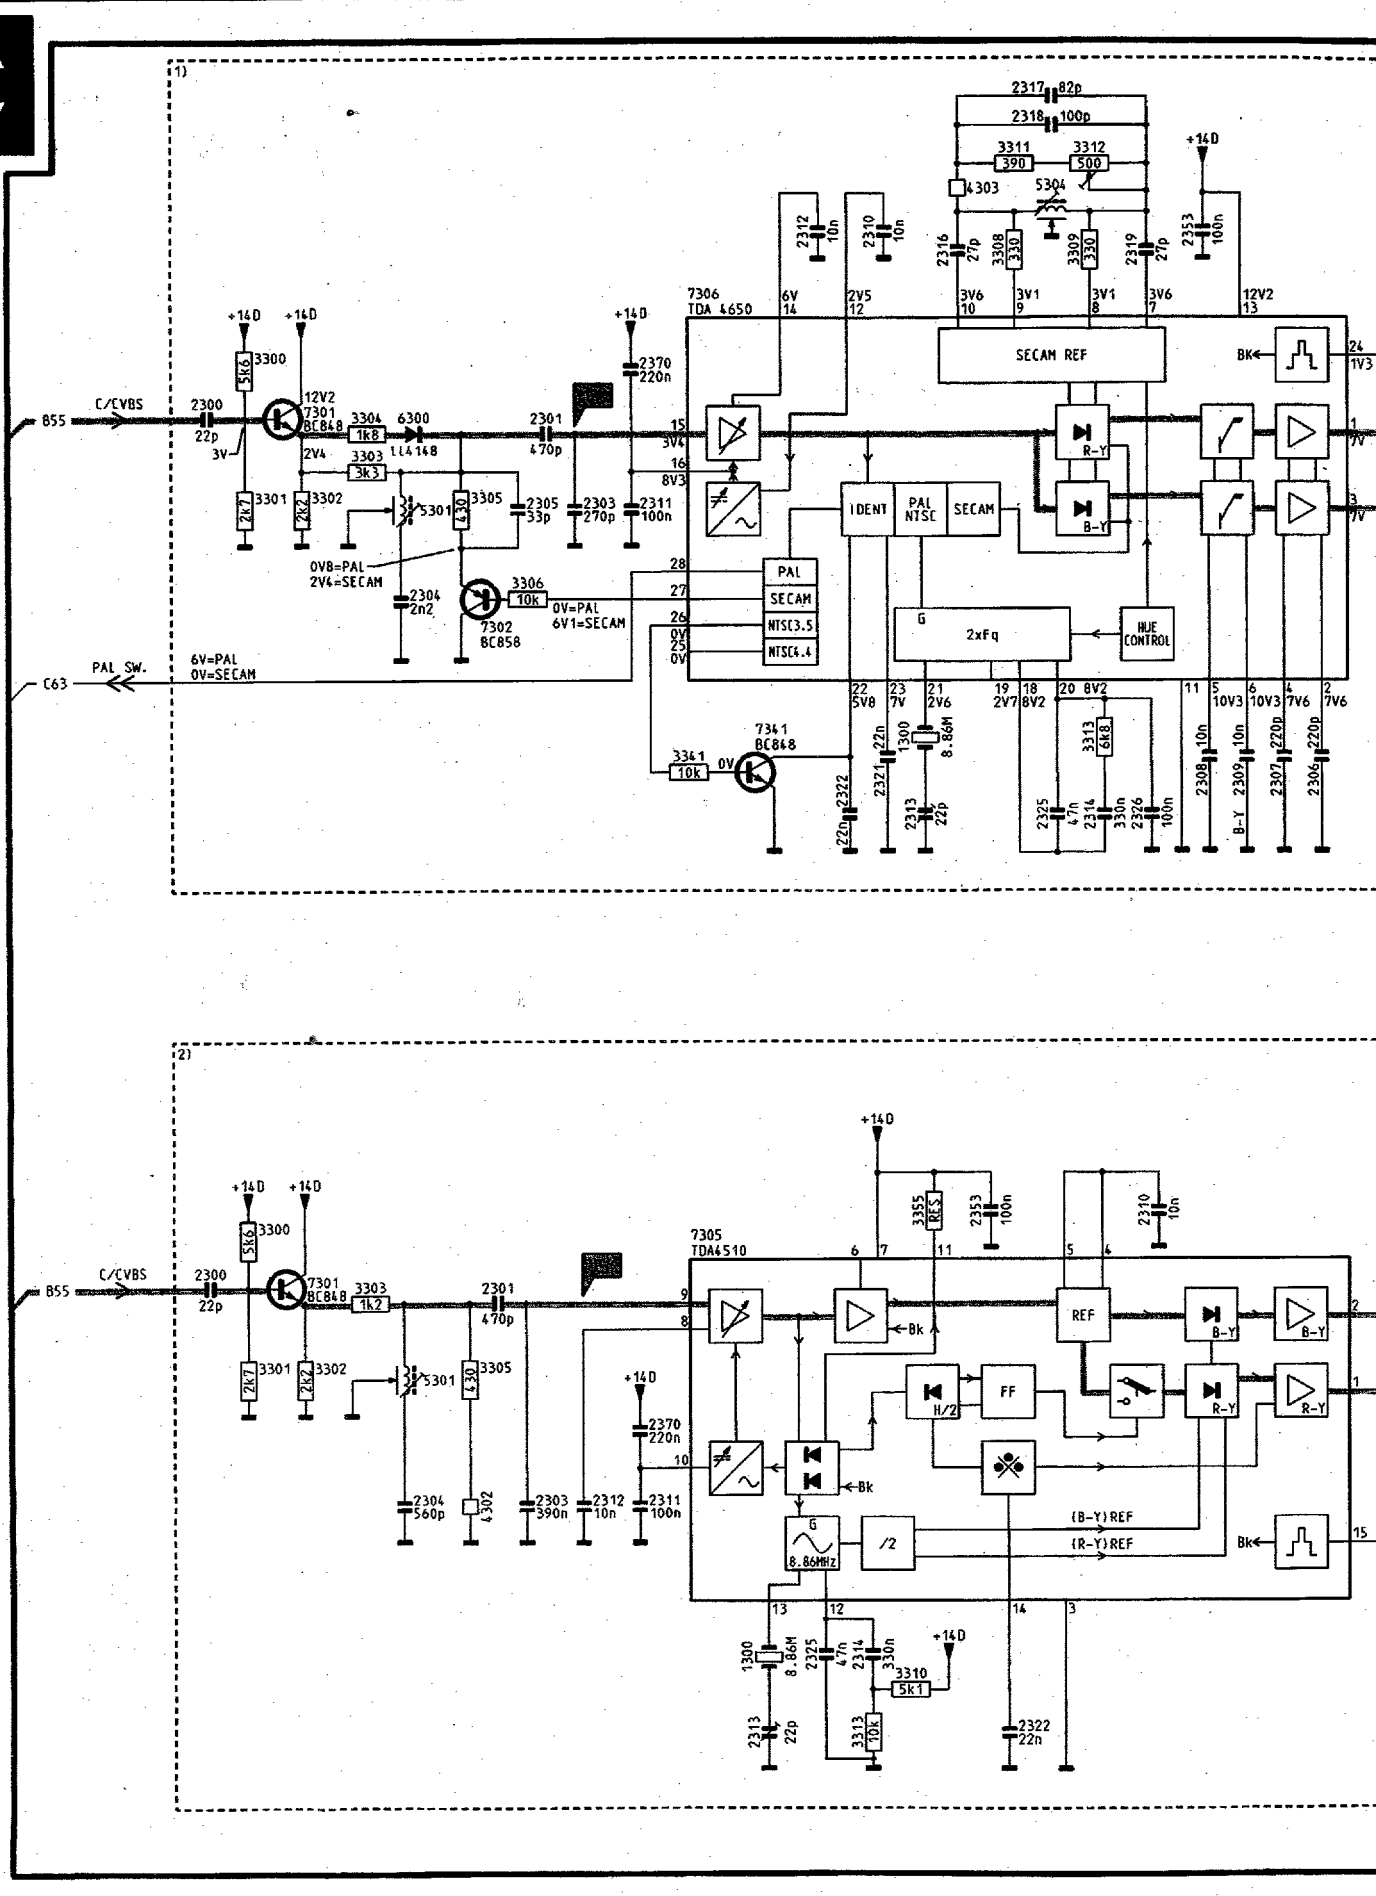
C
1)
2)
C/CVBS
B55
PAL SW.
C63
7306 TDA 4650
7305 TDA4510
SECAM REF
IDENT
PAL NTSC
SECAM
PAL
SECAM
NTSC3.5
NTSC4.4
2xFq
HUE CONTROL
R-Y
B-Y
REF
H/2
FF
/2
8.86MHz
+14D
0V=PAL
6V1=SECAM
6V=PAL
0V=SECAM
0V8=PAL
2V4=SECAM

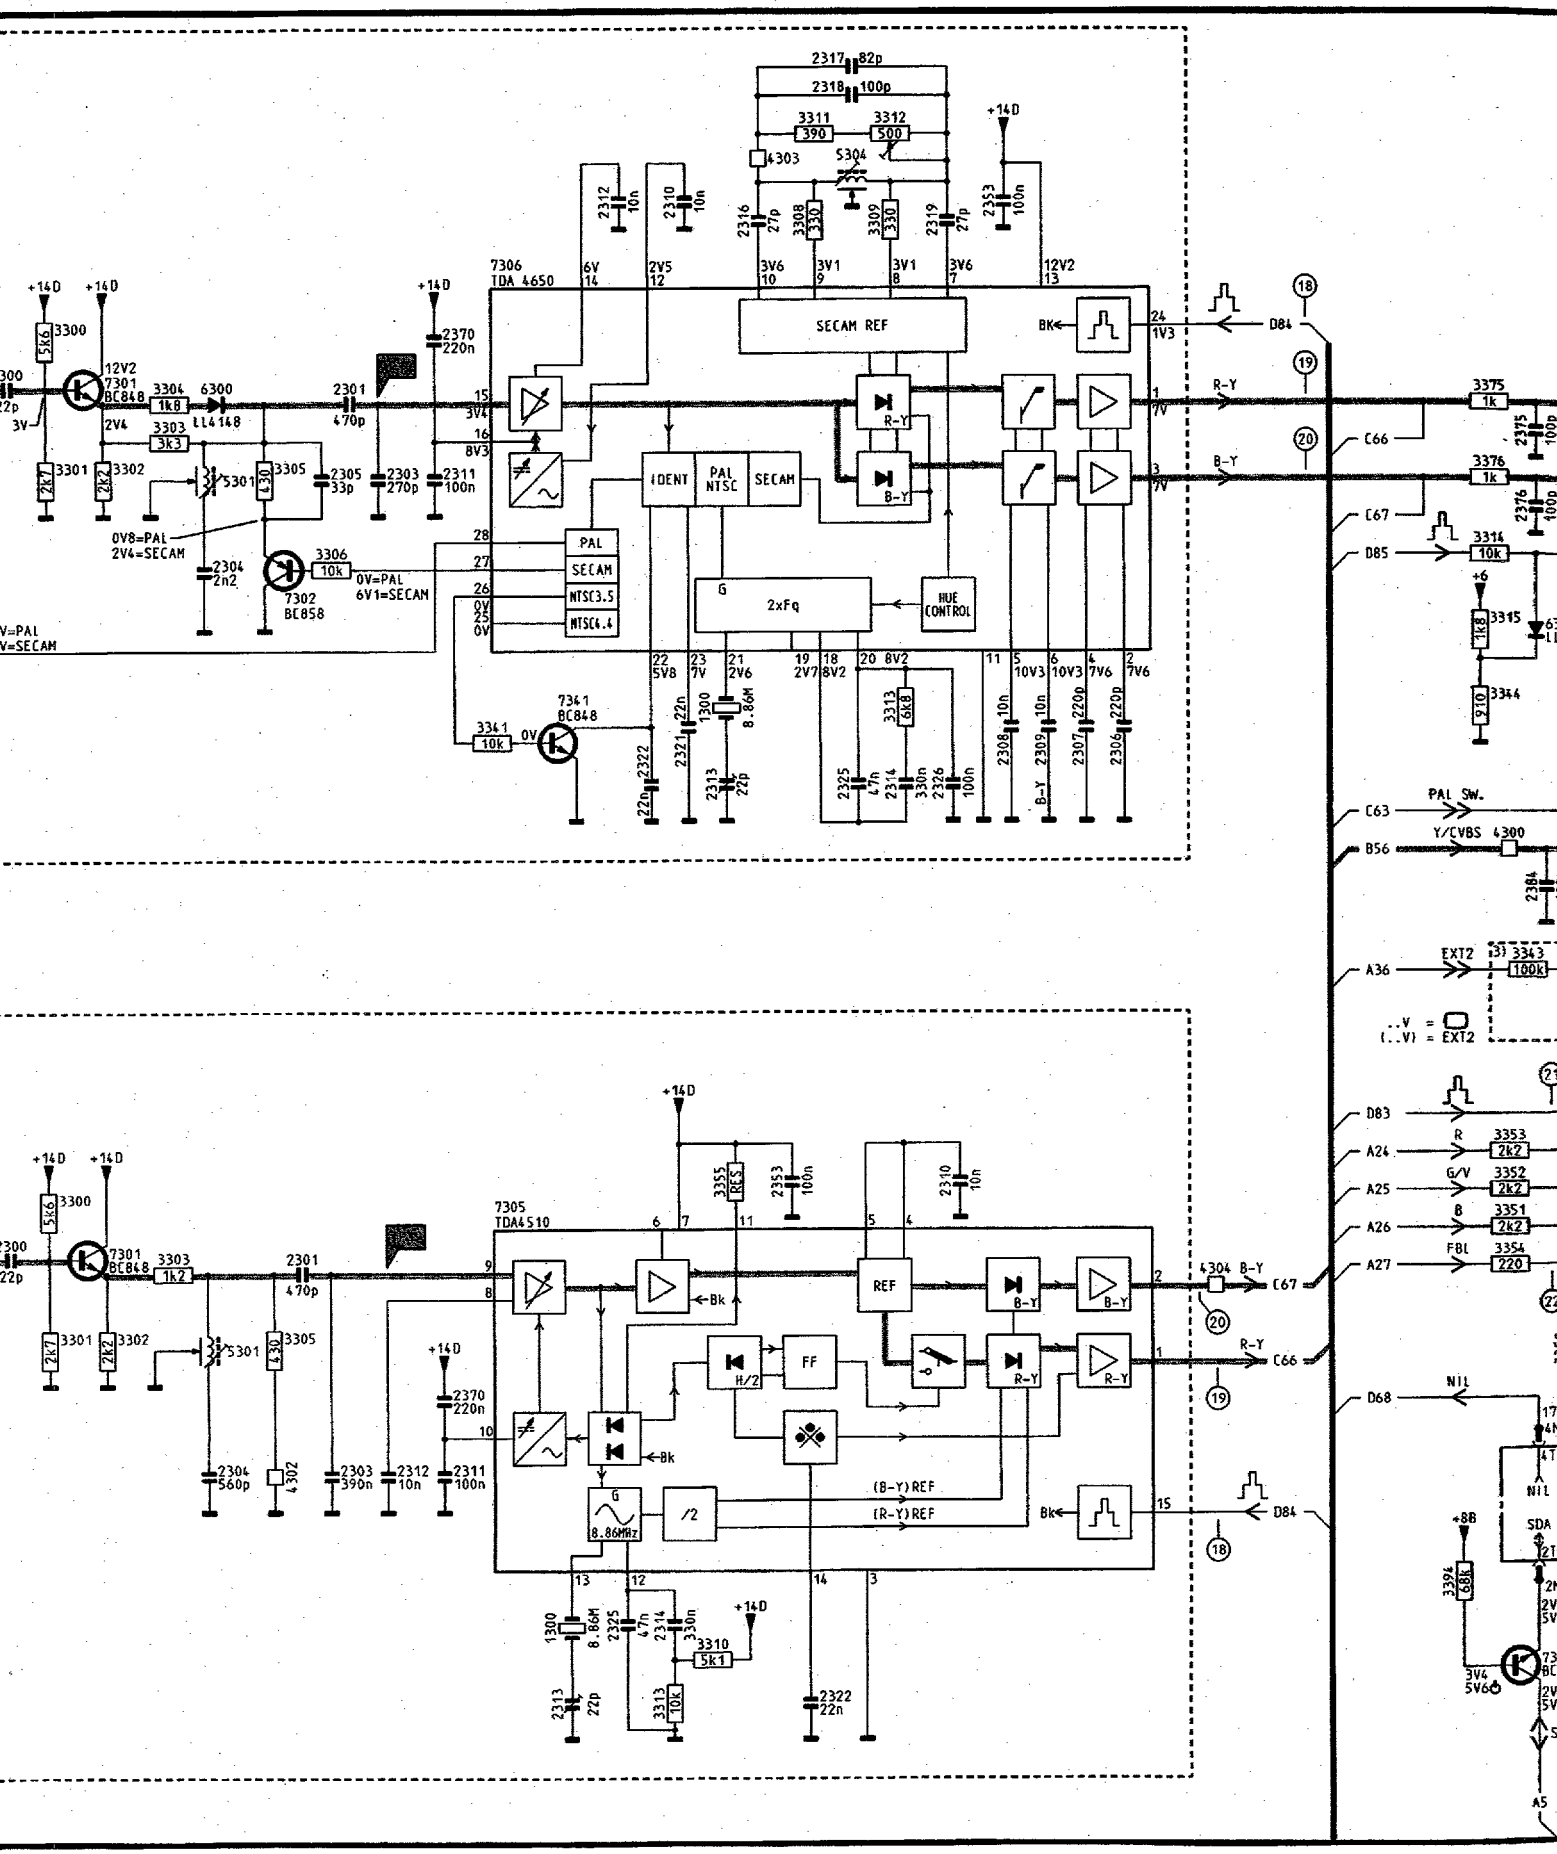
7306 TDA 4650
7305 TDA4510
SECAM REF
IDENT
PAL NTSC
SECAM
2xFq
HUE CONTROL
REF
FF
H/2
/2
8.86MHz
R-Y
B-Y
(B-Y)REF
(R-Y)REF
PAL
SECAM
NTSC3.5
NTSC4.4
0V8=PAL
2V4=SECAM
0V=PAL
6V1=SECAM
PAL SW.
Y/CVBS 4300
EXT2
..V = EXT2
(..V) = EXT2
SDA
NIL
+14D
+8B

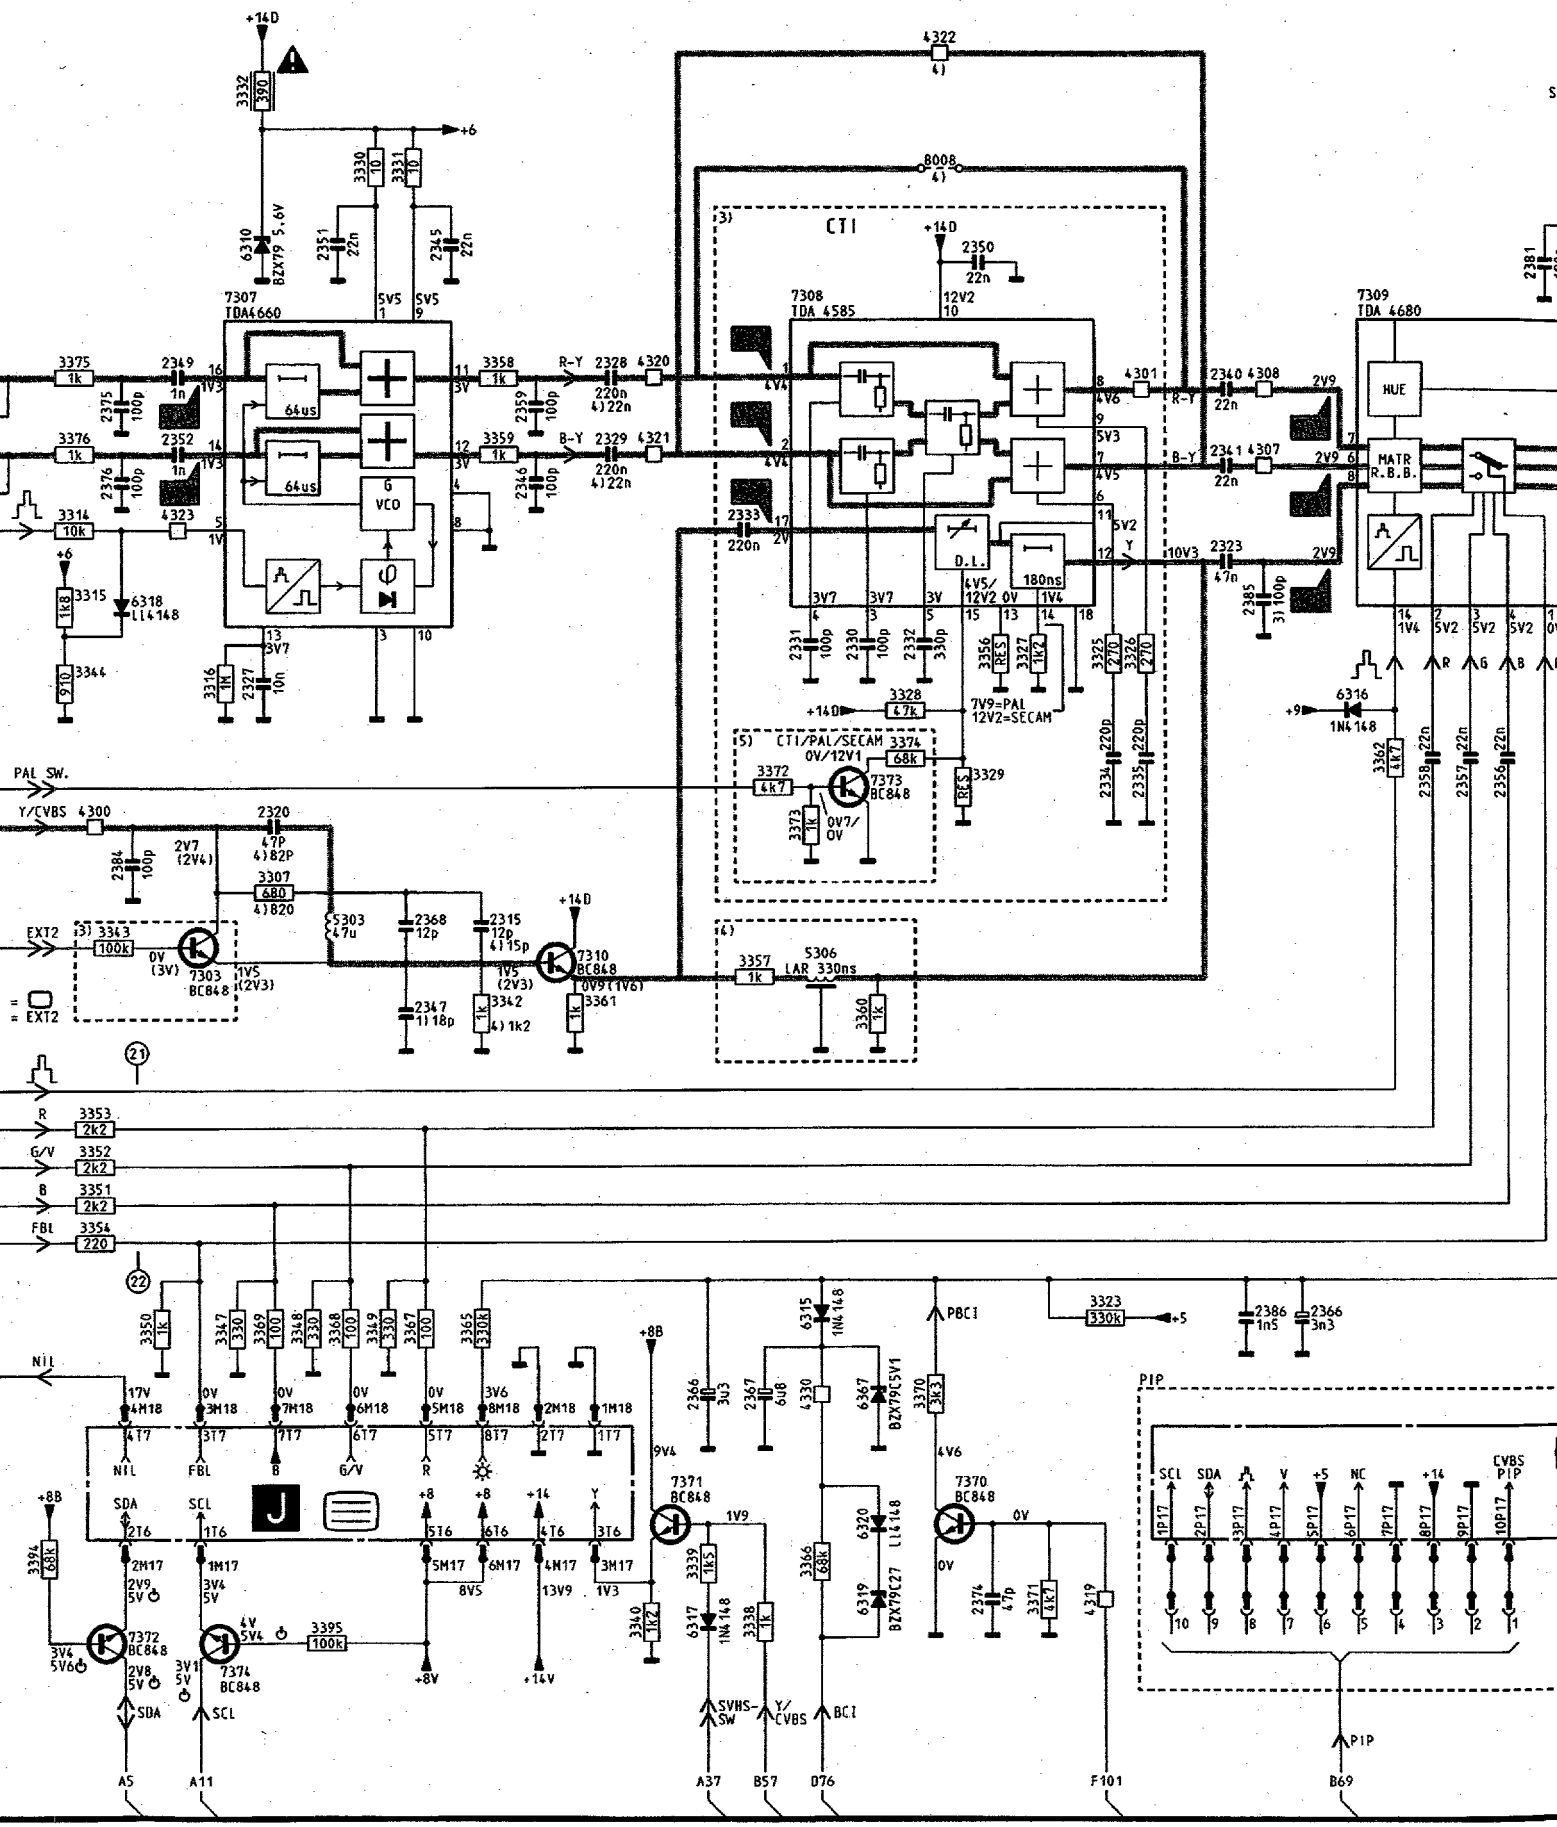
+14D
7307 TDA4660
7308 TDA 4585
7309 TDA 4680
CTI
64us
VCO
D.L.
180ns
HUE
MATR R.B.B.
CTI/PAL/SECAM 0V/12V1
7V9=PAL 12V2=SECAM
PAL SW.
Y/CVBS 4300
EXT2
LAR 330ns
SDA
SCL
SVHS-SW
Y/CVBS
BCI
PBCI
PIP
A5
A11
A37
B57
D76
F101
B69

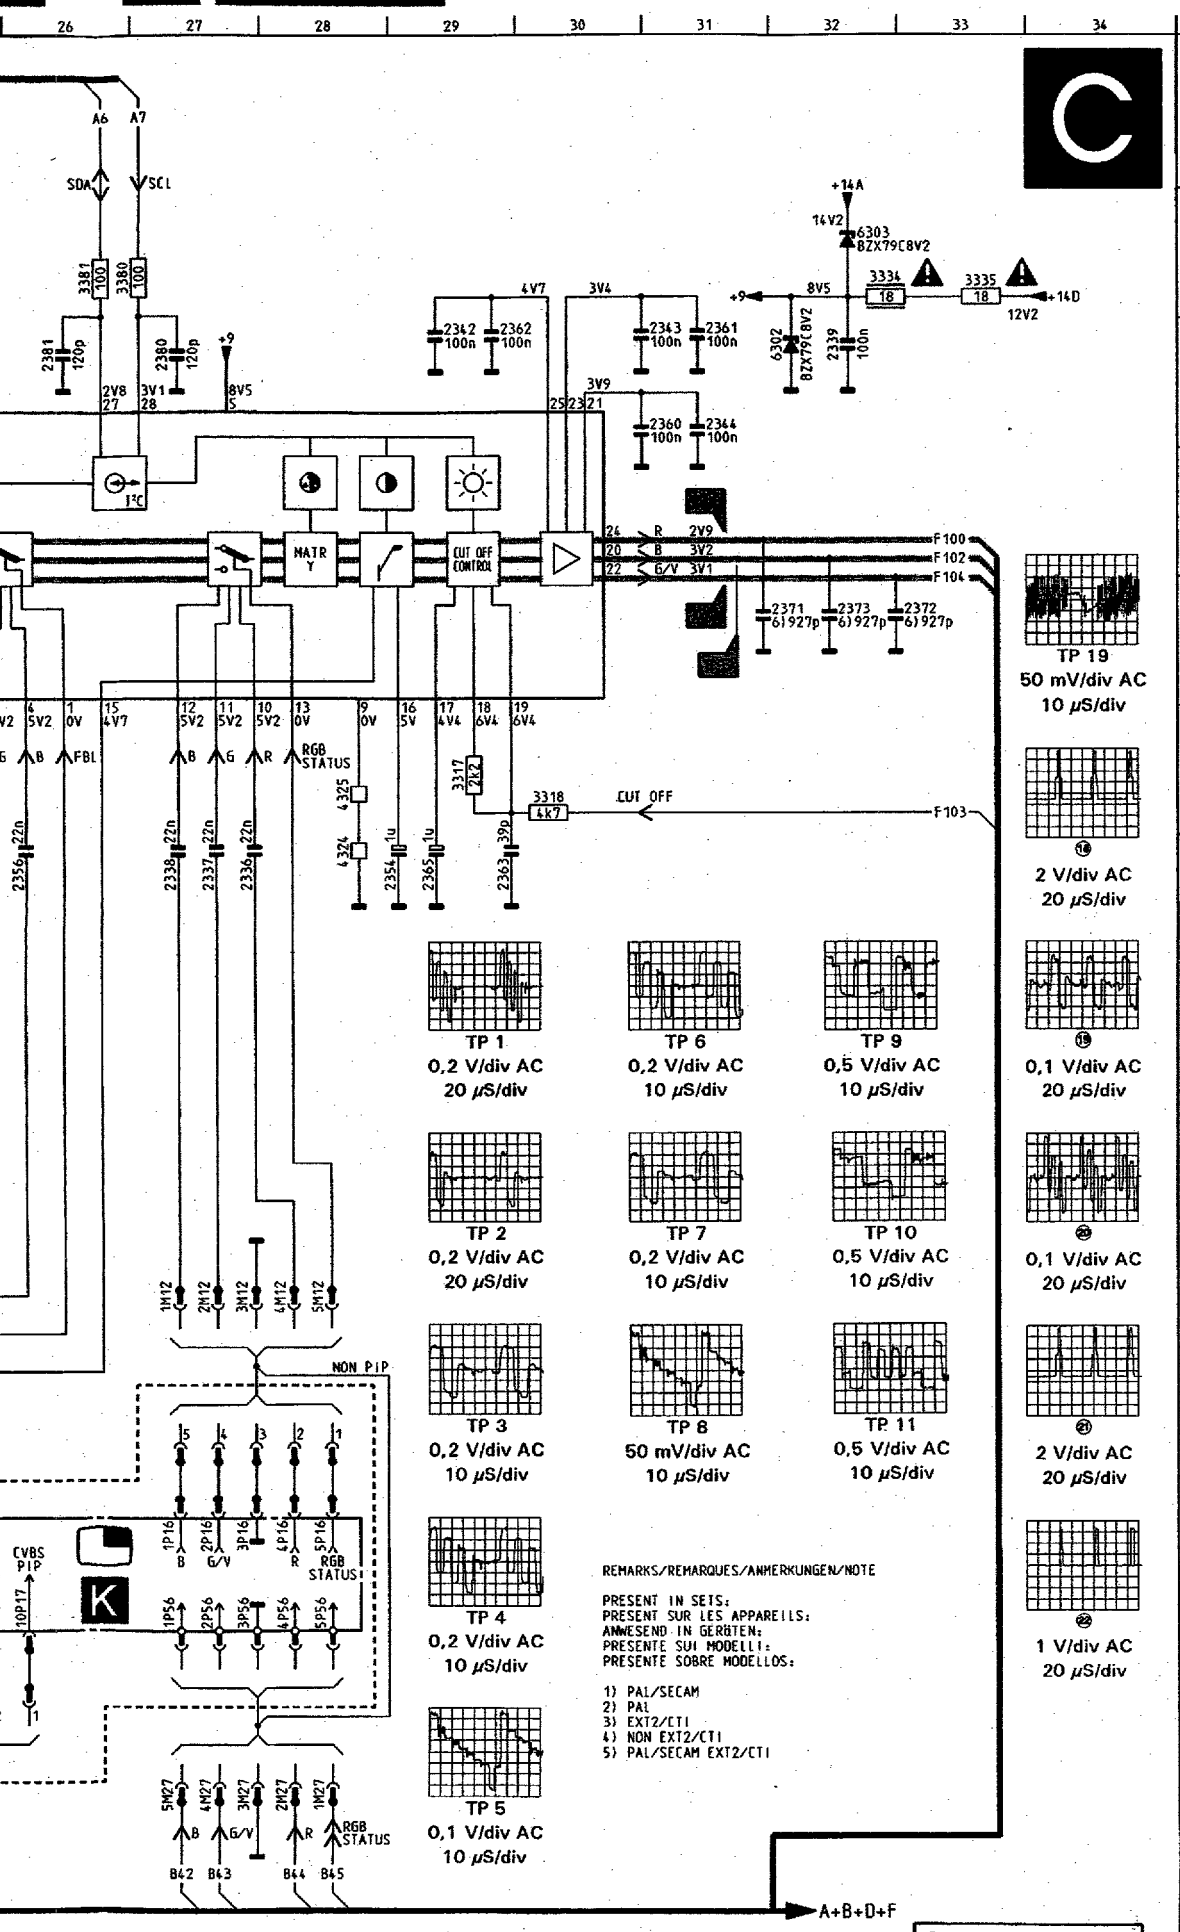

	1300	F 8	3318	F30
	1300	M 7	3323	K23
	2300	C 3	3325	F23
	2300	J 3	3326	F23
A	2301	D 6	3327	F22
	2301	J 5	3328	F21
	2303	D 6	3329	G21
	2303	L 5	3330	B17
	2304	E 4	3331	B17
	2304	L 4	3332	A16
	2305	D 5	3334	B32
	2306	F12	3335	B33
B	2307	F11	3338	M20
	2308	F11	3339	M19
	2309	F11	3340	M19
	2310	B 8	3341	F 7
	2310	J10	3342	H18
	2311	D 6	3343	H15
	2311	L 6	3344	F14
	2312	B 8	3347	K16
C	2312	L 6	3348	K16
	2313	G 8	3349	K17
	2313	N 7	3350	K15
	2314	G10	3351	J15
	2314	M 8	3352	J15
	2315	H18	3353	I15
	2316	B 9	3354	J15
	2317	A 9	3355	J 8
D	2318	A 9	3356	F22
	2319	B10	3357	H20
	2320	G16	3358	D18
	2321	F 8	3359	D18
	2322	N 9	3360	I21
	2322	G 8	3361	H18
	2323	E23	3362	G25
E	2325	G 9	3365	K18
	2325	M 8	3366	M20
	2326	G10	3367	K17
	2327	F16	3368	K17
	2328	D19	3369	K16
	2329	D19	3370	L21
	2330	F21	3371	M22
F	2331	F20	3372	G20
	2332	F21	3373	G20
	2333	E20	3374	G21
	2334	G23	3375	D14
	2335	G23	3376	D14
	2336	G27	3380	B26
	2337	G27	3381	B26
	2338	G27	3394	M14
G	2339	C32	3395	M16
	2340	D23	4300	G15
	2341	D23	4301	D23
	2342	C29	4303	B 9
	2343	C31	4304	J12
	2344	C31	4307	D24
	2345	C17	4308	D24
H	2346	D18	4319	M22
	2347	I17	4320	D19
	2349	D15	4321	D19
	2350	C22	4322	A21
	2351	C16	4323	E15
	2352	D15	4324	G28
	2353	B11	4325	F28
	2353	J 9	4330	L20
I	2354	G29	5301	D 5
	2356	G26	5301	K 5
	2357	G25	5303	H16
	2358	G25	5304	B 9
	2359	D18	5306	H20
	2360	C31	6300	D 4
	2361	C31	6302	C32
	2362	C29	6303	B32
J	2363	G29	6310	C16
	2365	G29	6315	K20
	2366	L19	6316	F24
	2366	K24	6317	H19
	2367	L20	6318	E15
	2368	H17	6319	M21
	2370	C 6	6320	M21
K	2370	K 6	6367	L21
	2371	E32	7301	D 4
	2372	E33	7301	J 4
	2373	E32	7302	E 5
	2374	M22	7303	H15
	2375	D15	7305	J 7
	2376	D15	7306	C 7
L	2380	C27	7307	C16
	2381	C26	7308	C20
	2384	G15	7309	C24
	2385	E24	7310	H18
	2386	K24	7341	F 7
	3300	C 3	7370	L21
	3300	J 3	7371	L19
	3301	D 3	7372	N15
M	3301	K 3	7373	G21
	3302	D 4	7374	N16
	3302	K 4	8008	B21
	3303	D 4		
	3303	J 4		
	3304	D 4		
	3305	D 5		
	3305	K 5		
N	3306	E 5		
	3307	H16		
	3308	B 9		
	3309	B10		
	3310	M 8		
	3311	B 9		
	3312	B10		
	3313	F10		
O	3313	N 8		
	3314	E14		
	3315	E14		
	3316	F16		
	3317	F29		

Monocarrier / Hauptplatine / Châssis

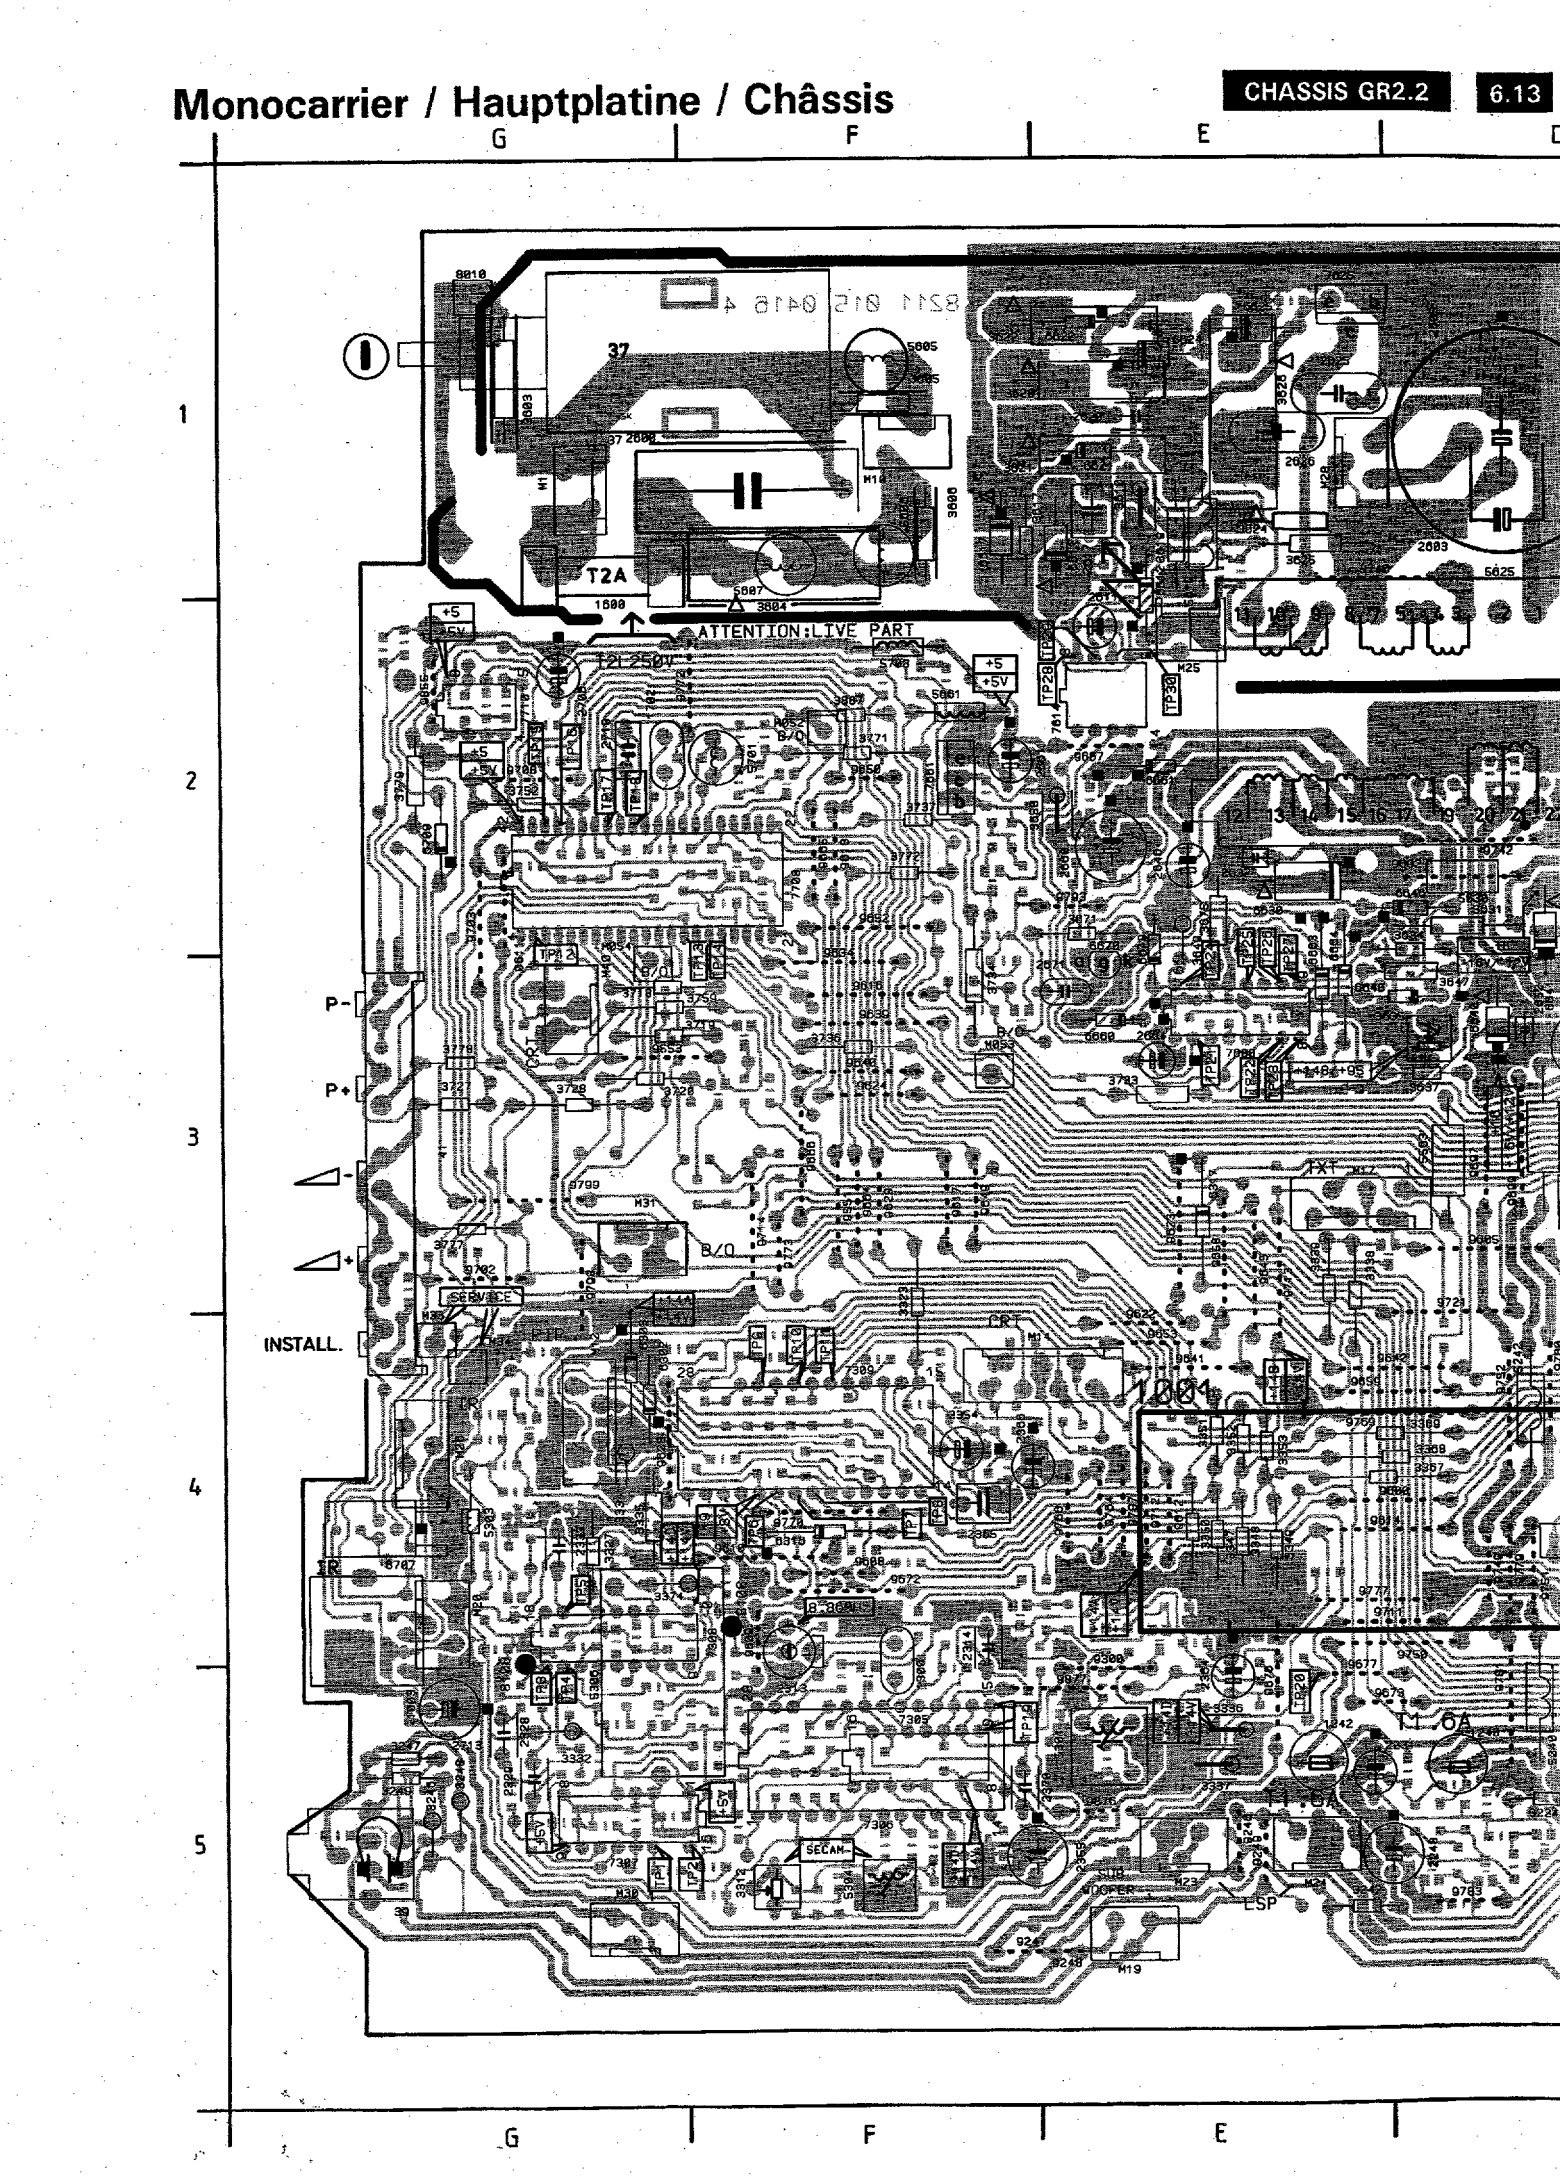

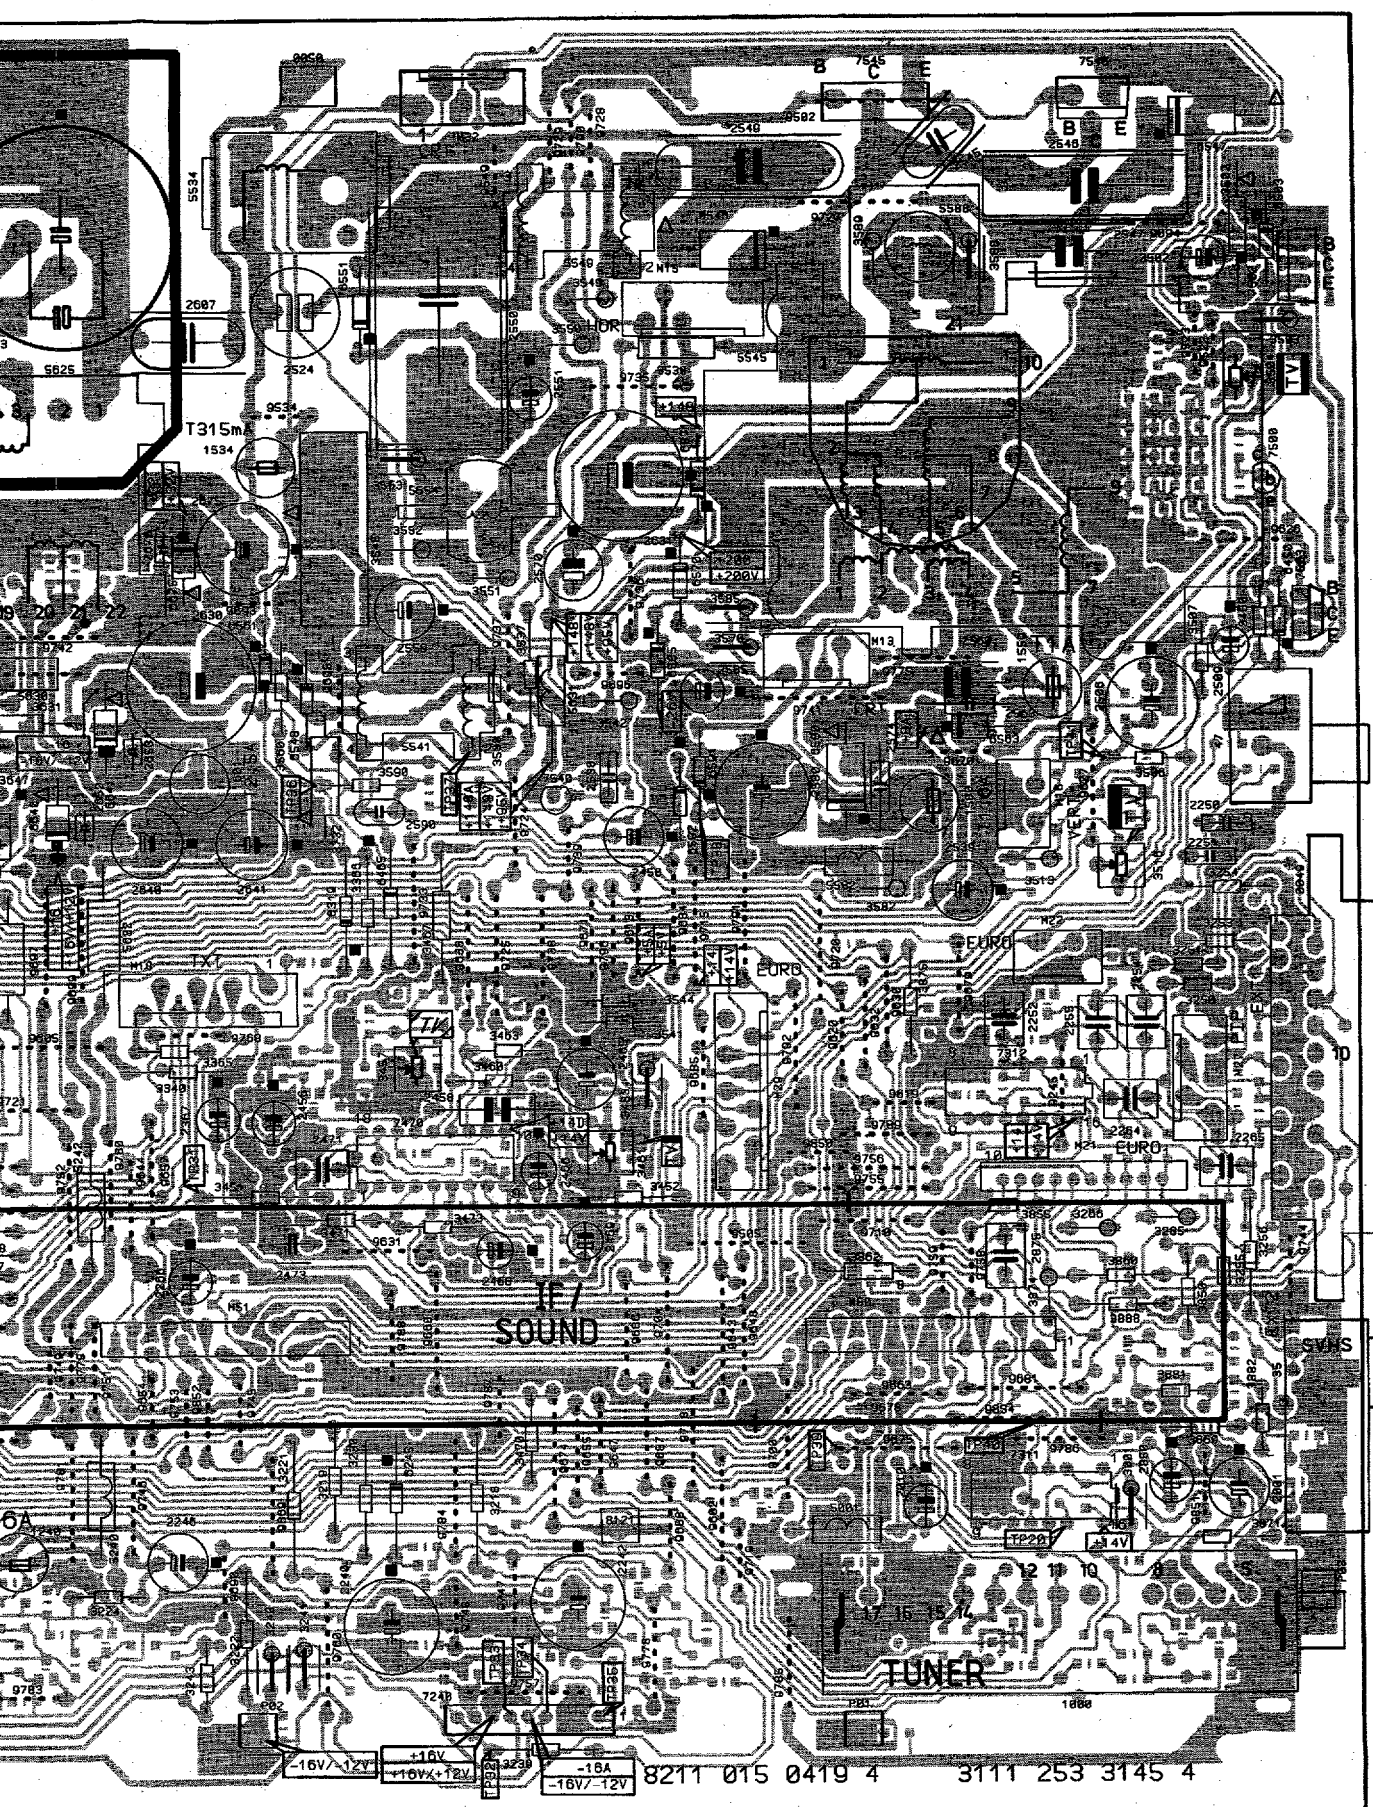

M10 F1
M11 G1
M12 G4
M13 B2
M14 E4
M15 B1
M16 A3
M17 D3
M18 C3
M19 E5
M20 G4
M21 A4
M22 A3
M23 E5
M24 E5
M25 E2
M26 G4
M27 A4
M28 D1
M29 B4
M30 G5
M31 F3
M32 C1
M33 G4
M34 G4
M40 G3
M50 B4
M51 D4
M52 F2
M53 E3
M54 F3
P01 B5
P02 C5
P03 A5
0035 A5
0037 G1
0039 G5
0041 G3
0047 A3
0049 A4
1000 A5
1003 G5
1240 D5
1242 E5
1300 F5
1534 C2
1559 A2
1580 B3
1600 G2
1601 D3
1702 F2
2001 A5
2010 B5
2231 D5
2240 C5
2242 C5
2246 D5
2248 D5
2250 A3
2251 A3
2252 A3
2254 A3
2255 A3
2264 A4
2265 A4
2266 D4
2313 F5
2314 E5
2328 G5
2329 G5
2333 G4
2354 F4
2355 E5
2364 E5
2365 F4
2366 E4
2367 D4
2370 E5
2450 B3
2456 C4
2458 C4
2465 C4
2466 C4
2468 C4
2469 C4
2471 C4
2473 C4
2502 A1
2506 A3
2509 A2
2524 C1
2538 B3
2539 A3
2545 A1
2546 A1
2547 A1
2549 B1
2550 C1
2551 C2
2559 C2
2560 B2
2563 A3
2570 C2
2574 B3
2580 B3
2585 B2
2590 C3
2600 F1
2603 D1
2605 D1
2607 D1
2611 E2
2617 E1
2620 E1
2625 D1
2626 E1
2630 D2
2631 C2
2632 E2
2640 D3
2641 D3
2646 E2
2652 D3
2653 D3
2660 E2

M10 F1 2661 E2 3734 F3 9605 D3 9773 F3
M11 G1 2664 E3 3736 F3 9608 F4 9775 B2
M12 G4 2671 E3 3737 F2 9609 F5 9777 D4
M13 B2 2675 D2 3752 G2 9610 F4 9778 B5
M14 E4 2676 D2 3759 F3 9611 G2 9779 D4
M15 B1 2706 G2 3771 F2 9612 E4 9780 D4
M16 A3 2713 G5 3772 F2 9613 B3 9781 D5
M17 D3 2719 F2 3777 G3 9614 D4 9783 D5
M18 C3 2850 A5 3778 G3 9616 F3 9784 C5
M19 E5 2875 A4 3779 G2 9617 F3 9785 B5
M20 G4 3001 A5 3850 A4 9618 F2 9786 A5
M21 A4 3218 C5 3855 A4 9619 B4 9787 C4
M22 A3 3219 C5 3860 A4 9620 B3 9788 C4
M23 E5 3221 C5 3862 B4 9622 E4 9789 B4
M24 E5 3222 D5 3869 A5 9623 E3 9790 C1
M25 E2 3224 D5 3871 A5 9624 F3 9791 B3
M26 G4 3230 C5 3874 A4 9626 A2 9792 B3
M27 A4 3239 C5 3875 B3 9627 A3 9793 E2
M28 D1 3240 C5 3881 A4 9628 F4 9796 B3
M29 B4 3241 C5 3882 A5 9629 F3 9797 E4
M30 G5 3242 D5 3887 F2 9630 B3 9798 G4
M31 F3 3243 D5 3888 A4 9631 C4 9799 G3
M32 C1 3246 G5 5001 B5 9632 B3 9850 B4
M33 G4 3247 G5 5240 D5 9634 F3 9851 A5
M34 G4 3248 G5 5242 D4 9638 C3 9852 D5
M40 G3 3249 G5 5301 E5 9639 F3 9853 F3
M50 B4 3250 A3 5303 G4 9640 F3 9854 A5
M51 D4 3251 A3 5304 F5 9641 E4 9855 G2
M52 F2 3253 A3 5306 F4 9642 D4 9869 C5
M53 E3 3254 A3 5534 D1 9643 B4 9876 E5
M54 F3 3255 A4 5541 C2 9644 D4 9877 E5
P01 B5 3256 A4 5545 A2 9645 E4
P02 C5 3265 A4 5549 B1 9647 C5
P03 A5 3266 A4 5554 C2 9648 B4
0035 A5 3312 F5 5563 D3 9649 F3
0037 G1 3323 F4 5582 B3 9650 F2
0039 G5 3327 G4 5588 B1 9652 F3
0041 G3 3332 G5 5605 F1 9653 E4
0047 A3 3334 G4 5606 F1 9654 D4
0049 A4 3335 F4 5607 F2 9655 C5
1000 A5 3336 E5 5619 E1 9657 D4
1003 G5 3337 E5 5625 D2 9658 E3
1240 D5 3338 D4 5630 D2 9659 D4
1242 E5 3339 E4 5631 C2 9663 B4
1300 F5 3340 D4 5632 D3 9664 F3
1534 C2 3347 E4 5661 F2 9665 F2
1559 A2 3348 E4 5701 F2 9666 F3
1580 B3 3349 E4 5703 F2 9667 E2
1600 G2 3350 E4 6245 C5 9668 C4
1601 D3 3351 E4 6302 F4 9670 A3
1702 F2 3352 E4 6303 G4 9671 C3
2001 A5 3353 E4 6316 F4 9672 F4
2010 B5 3365 D3 6317 E3 9673 D5
2231 D5 3366 C3 6319 C3 9674 C5
2240 C5 3367 D4 6450 A2 9675 B5
2242 C5 3368 D4 6465 C3 9676 E5
2246 D5 3369 D4 6503 A1 9677 D5
2248 D5 3374 F4 6546 B1 9678 B5
2250 A3 3450 A2 6547 A1 9679 A3
2251 A3 3451 C4 6548 C2 9681 A4
2252 A3 3452 B4 6551 C1 9682 B5
2254 A3 3457 C4 6561 C2 9684 B3
2255 A3 3460 C4 6563 A3 9685 B4
2264 A4 3461 C4 6570 B2 9686 B4
2265 A4 3463 C3 6571 B2 9687 B5
2266 D4 3467 C3 6580 B3 9688 B5
2313 F5 3470 C5 6585 B2 9690 D5
2314 E5 3471 C4 6591 B3 9692 D2
2328 G5 3473 C4 6592 B3 9693 C2
2329 G5 3483 B4 6611 E1 9694 A1
2333 G4 3502 A1 6612 E2 9695 C3
2354 F4 3503 A1 6617 E1 9696 B2
2355 E5 3504 A2 6621 E1 9697 D3
2364 E5 3506 A3 6622 E1 9699 D3
2365 F4 3507 A2 6624 E1 9700 B5
2366 E4 3513 A3 6625 E1 9702 G4
2367 D4 3516 A3 6630 E2 9703 G3
2370 E5 3537 C2 6640 D3 9704 B4
2450 B3 3538 C2 6641 D3 9708 G2
2456 C4 3539 B2 6646 D2 9710 B4
2458 C4 3541 B3 6648 D3 9711 D4
2465 C4 3542 B2 6649 E3 9712 E4
2466 C4 3544 B3 6660 E3 9713 E4
2468 C4 3545 C2 6661 E2 9714 F3
2469 C4 3549 C1 6663 E3 9715 B3
2471 C4 3550 C1 6664 D3 9718 B5
2473 C4 3551 C2 6670 E3 9719 B5
2502 A1 3552 C2 6675 D2 9720 B3
2506 A3 3553 C2 6707 G4 9721 D4
2509 A2 3560 C2 6709 G2 9724 C3
2524 C1 3570 B2 7240 C5 9725 C3
2538 B3 3582 B3 7305 F5 9727 B1
2539 A3 3585 B2 7306 F5 9728 C1
2545 A1 3588 A1 7307 F5 9729 C1
2546 A1 3589 B1 7308 G5 9733 C3
2547 A1 3590 C3 7309 F4 9735 B2
2549 B1 3603 G1 7311 A5 9736 B2
2550 C1 3604 F2 7312 A4 9737 C2
2551 C2 3605 F1 7470 C4 9738 C3
2559 C2 3606 F1 7500 A2 9739 C3
2560 B2 3610 E1 7502 A1 9740 D2
2563 A3 3617 E1 7503 A2 9741 B2
2570 C2 3619 E1 7540 C3 9742 D2
2574 B3 3620 E1 7545 B1 9744 A4
2580 B3 3621 E1 7546 A1 9745 D4
2585 B2 3622 E1 7600 E3 9746 D5
2590 C3 3624 E1 7614 E2 9747 C5
2600 F1 3625 E1 7625 D1 9748 C5
2603 D1 3626 E1 7661 F2 9749 D4
2605 D1 3631 D3 7708 G3 9750 D5
2607 D1 3634 D3 7710 G2 9751 D4
2611 E2 3635 D3 9245 A4 9752 D4
2617 E1 3637 D3 9246 E5 9753 D5
2620 E1 3647 D3 9247 E5 9755 B4
2625 D1 3649 E3 9248 E5 9756 B4
2626 E1 3658 E2 9249 E5 9757 C5
2630 D2 3671 E3 9300 E5 9758 A4
2631 C2 3675 E3 9502 B1 9759 B4
2632 E2 3718 F3 9505 B4 9760 C5
2640 D3 3719 F3 9522 A2 9764 E4
2641 D3 3720 F3 9523 A1 9766 E4
2646 E2 3727 G3 9534 C2 9768 D3
2652 D3 3728 G3 9549 C1 9769 D4
2653 D3 3732 C3 9551 F3 9770 F4
2660 E2 3733 E3 9600 D4 9772 F2



TP 1
0,2 V/div AC
20 µS/div



TP 8
50 mV/div AC
10 µS/div



TP 14
0,2 V/div DC
0,5 mS/div



TP 21
0,5 V/div DC
5 µS/div

TP 26
0,1 V/div AC
5 mS/div



TP 2
0,2 V/div AC
20 µS/div



TP 9
0,5 V/div AC
10 µS/div



TP 15
1 V/div AC
0,2 mS/div



TP 21
0,5 V/div DC
10 µS/div



TP 27
1 V/div DC



TP 3
0,2 V/div AC
10 µS/div



TP 10
0,5 V/div AC
10 µS/div



TP 16
1 V/div DC
0,1 mS/div



TP 22
1 V/div DC



TP 27
50 mV/div AC
10 mS/div



TP 4
0,2 V/div AC
10 µS/div



TP 11
0,5 V/div AC
10 µS/div



TP 17
1 V/div DC
20 mS/div



TP 23
1 V/div DC



TP 28
0,5 V/div AC
5 µS/div



TP 5
0,1 V/div AC
10 µS/div



TP 12
1 V/div AC
10 µS/div



TP 18
2 V/div DC
20 mS/div



TP 24
5V/div DC



TP 28
1 /div AC
10 mS/div



TP 6
0,2 V/div AC
10 µS/div



TP 13
1 V/div DC
1 S/div



TP 19
50 mV/div AC
10 µS/div



TP 25
0,2 V/div AC
5 µS/div



TP 29
0,5 V/div AC
5 µS/div



TP 7
0,2 V/div AC
10 µS/div



TP 14
1 V/div DC
0,5 mS/div



TP 20
0,5 V/div AC
10 µS/div



TP 26
1 V/div DC



TP 29
1 V/div AC
10 mS/div



TP 30
2 V/div DC
5 µS/div


TP 1
0,2 V/div AC
20 µS/div


TP 8
50 mV/div AC
10 µS/div


TP 14 ⏱
0,2 V/div DC
0,5 mS/div


TP 21
0,5 V/div DC
5 µS/div


TP 26 ⏱
0,1 V/div AC
5 mS/div


TP 30 ⏱
1 V/div DC
10 mS/div


TP 38
20 mV/div AC
20 µS/div


TP 2
0,2 V/div AC
20 µS/div


TP 9
0,5 V/div AC
10 µS/div


TP 15
1 V/div AC
0,2 mS/div


TP 21 ⏱
0,5 V/div DC
10 µS/div


TP 27
1 V/div DC


TP 31
2 V/div DC
20 µS/div


TP 39
0,2 V/div AC
20 µS/div


TP 3
0,2 V/div AC
10 µS/div


TP 10
0,5 V/div AC
10 µS/div


TP 16
1 V/div DC
0,1 mS/div


TP 22
1 V/div DC


TP 27 ⏱
50 mV/div AC
10 mS/div


TP 32
50 mV/div DC
0,2 mS/div


TP 40
0,5 V/div AC
20 µS/div


TP 4
0,2 V/div AC
10 µS/div


TP 11
0,5 V/div AC
10 µS/div


TP 17
1 V/div DC
20 mS/div


TP 23
1 V/div DC



TP 28
0,5 V/div AC
5 µS/div


TP 33
2 V/div DC
0,2 mS/div


TP 41
2 V/div AC
5 mS/div


TP 5
0,1 V/div AC
10 µS/div


TP 12
1 V/div AC
10 µS/div


TP 18
2 V/div DC
20 mS/div


TP 24
5V/div DC



TP 28 ⏱
1 /div AC
10 mS/div


TP 34
2 V/div DC
20 µS/div


TP 41 a
5 V/div AC
5 mS/div


TP 6
0,2 V/div AC
10 µS/div


TP 13
1 V/div DC
1 S/div


TP 19
50 mV/div AC
10 µS/div


TP 25
0,2 V/div AC
5 µS/div



TP 29
0,5 V/div AC
5 µS/div


TP 35
50 mV/div DC
0,2 mS/div

TP 41 b
5 V/div AC
5 mS/div


TP 7
0,2 V/div AC
10 µS/div


TP 14
1 V/div DC
0,5 mS/div


TP 20
0,5 V/div AC
10 µS/div


TP 26
1 V/div DC


TP 29 ⏱
1 V/div A/C
10 mS/div


TP 36
0,2 V/div AC
5 mS/div


TP 41 c
0,1 V/div AC
5 mS/div


TP 30
2 V/div DC
5 µS/div


TP 37
2 V/div AC
20 µS/div


TP 41 d
5 V/div AC
5 mS/div

6.16 CHASSIS GR2.2

Power supply / Stromversorgur



① 2 V/div AC
2 mS/div
280 V DC



② 50 V/div AC
5 µS/div



② ⏻ 50 V/div AC
5 µS/div



③ 50 V/div AC
5 µS/div



③ ⏻ 50 V/div AC
5 µS/div



④ 5 V/div AC
5 µS/div



④ ⏻ 5 V/div AC
5 µS/div



⑤ 0,5 V/div AC
5 µS/div



⑤ ⏻ 0,5 V/div AC
5 µS/div



⑥ 100 V/div AC
5 µS/div



⑥ ⏻ 2 V/div AC
2 mS/div



⑦ 0,5 V/div AC
20 µS/div



⑧ 0,5 V/div AC
20 µS/div



⑨ 2 V/div AC
20 µS/div

⑩ 0,5 V/div AC
5 mS/div

⑪ 0,5 V/div AC
5 mS/div

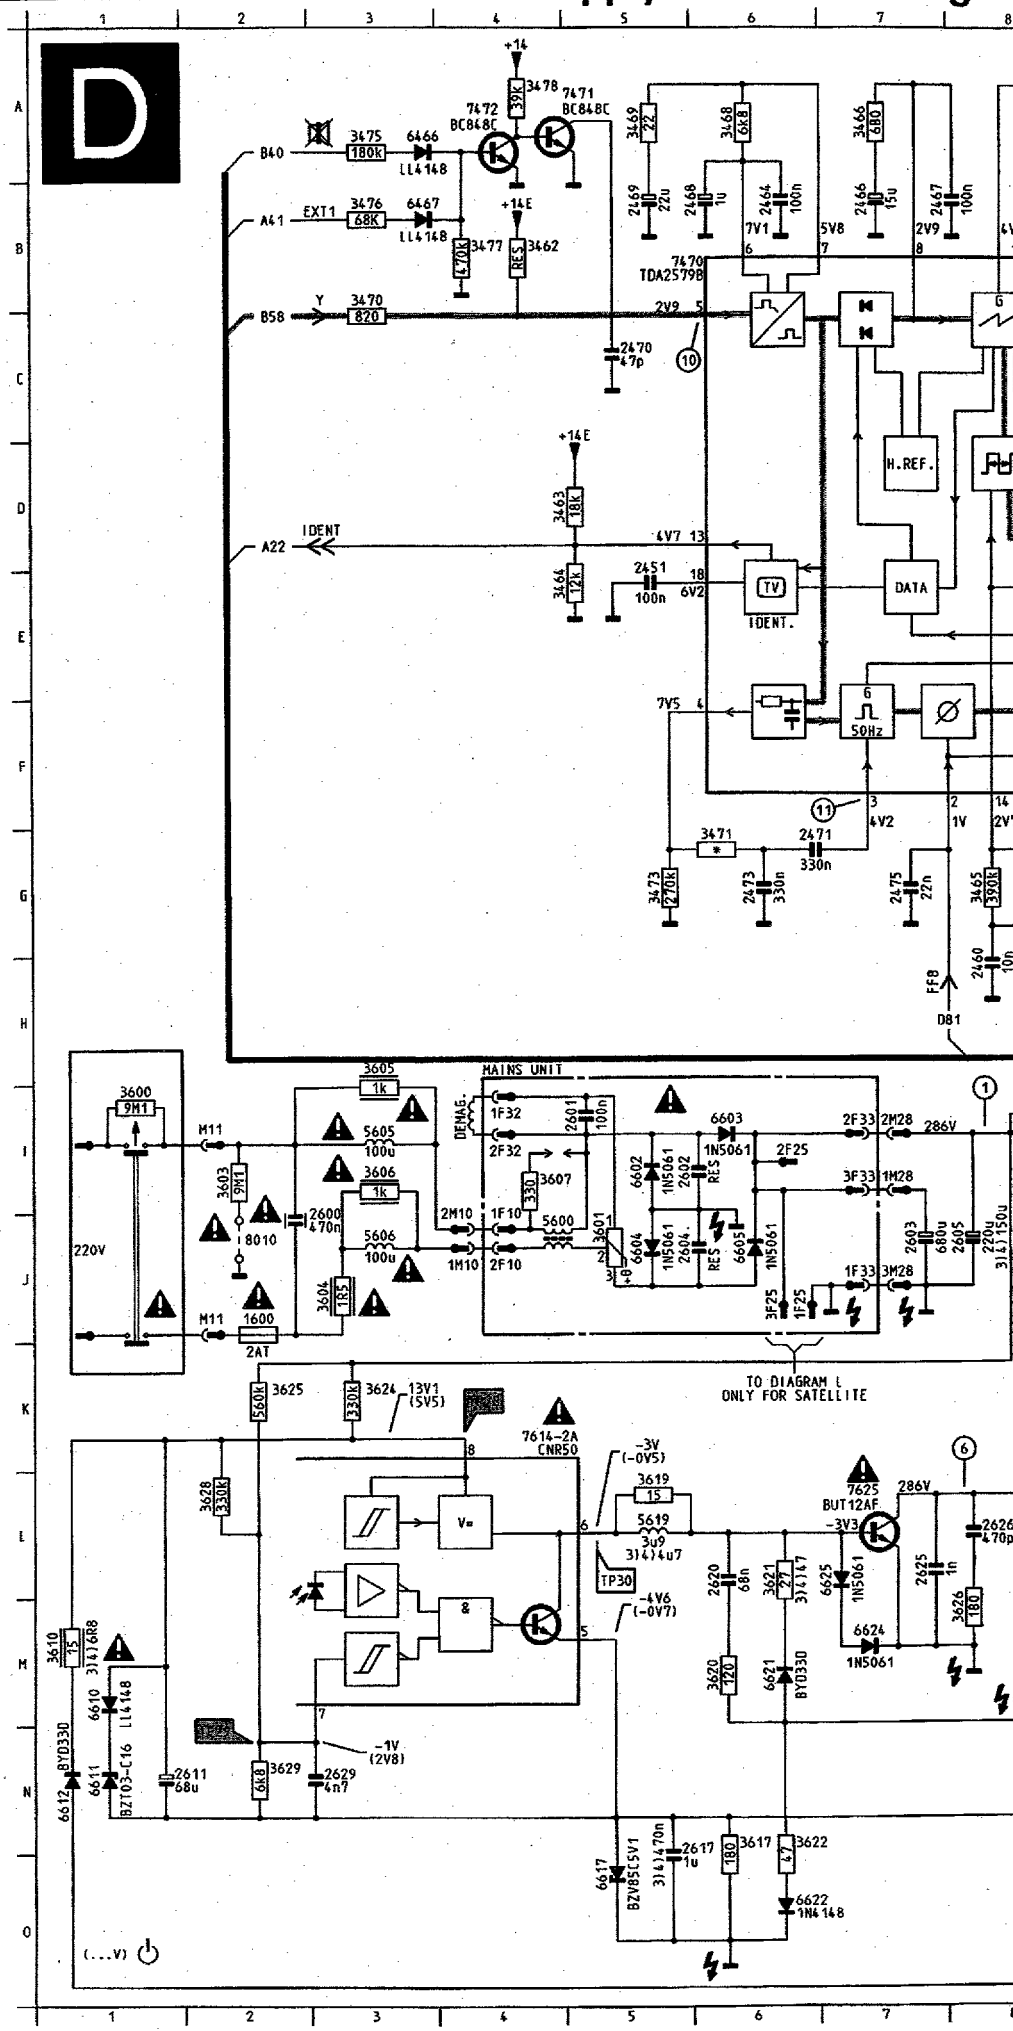

Power supply / Stromversorgung / Alimentation

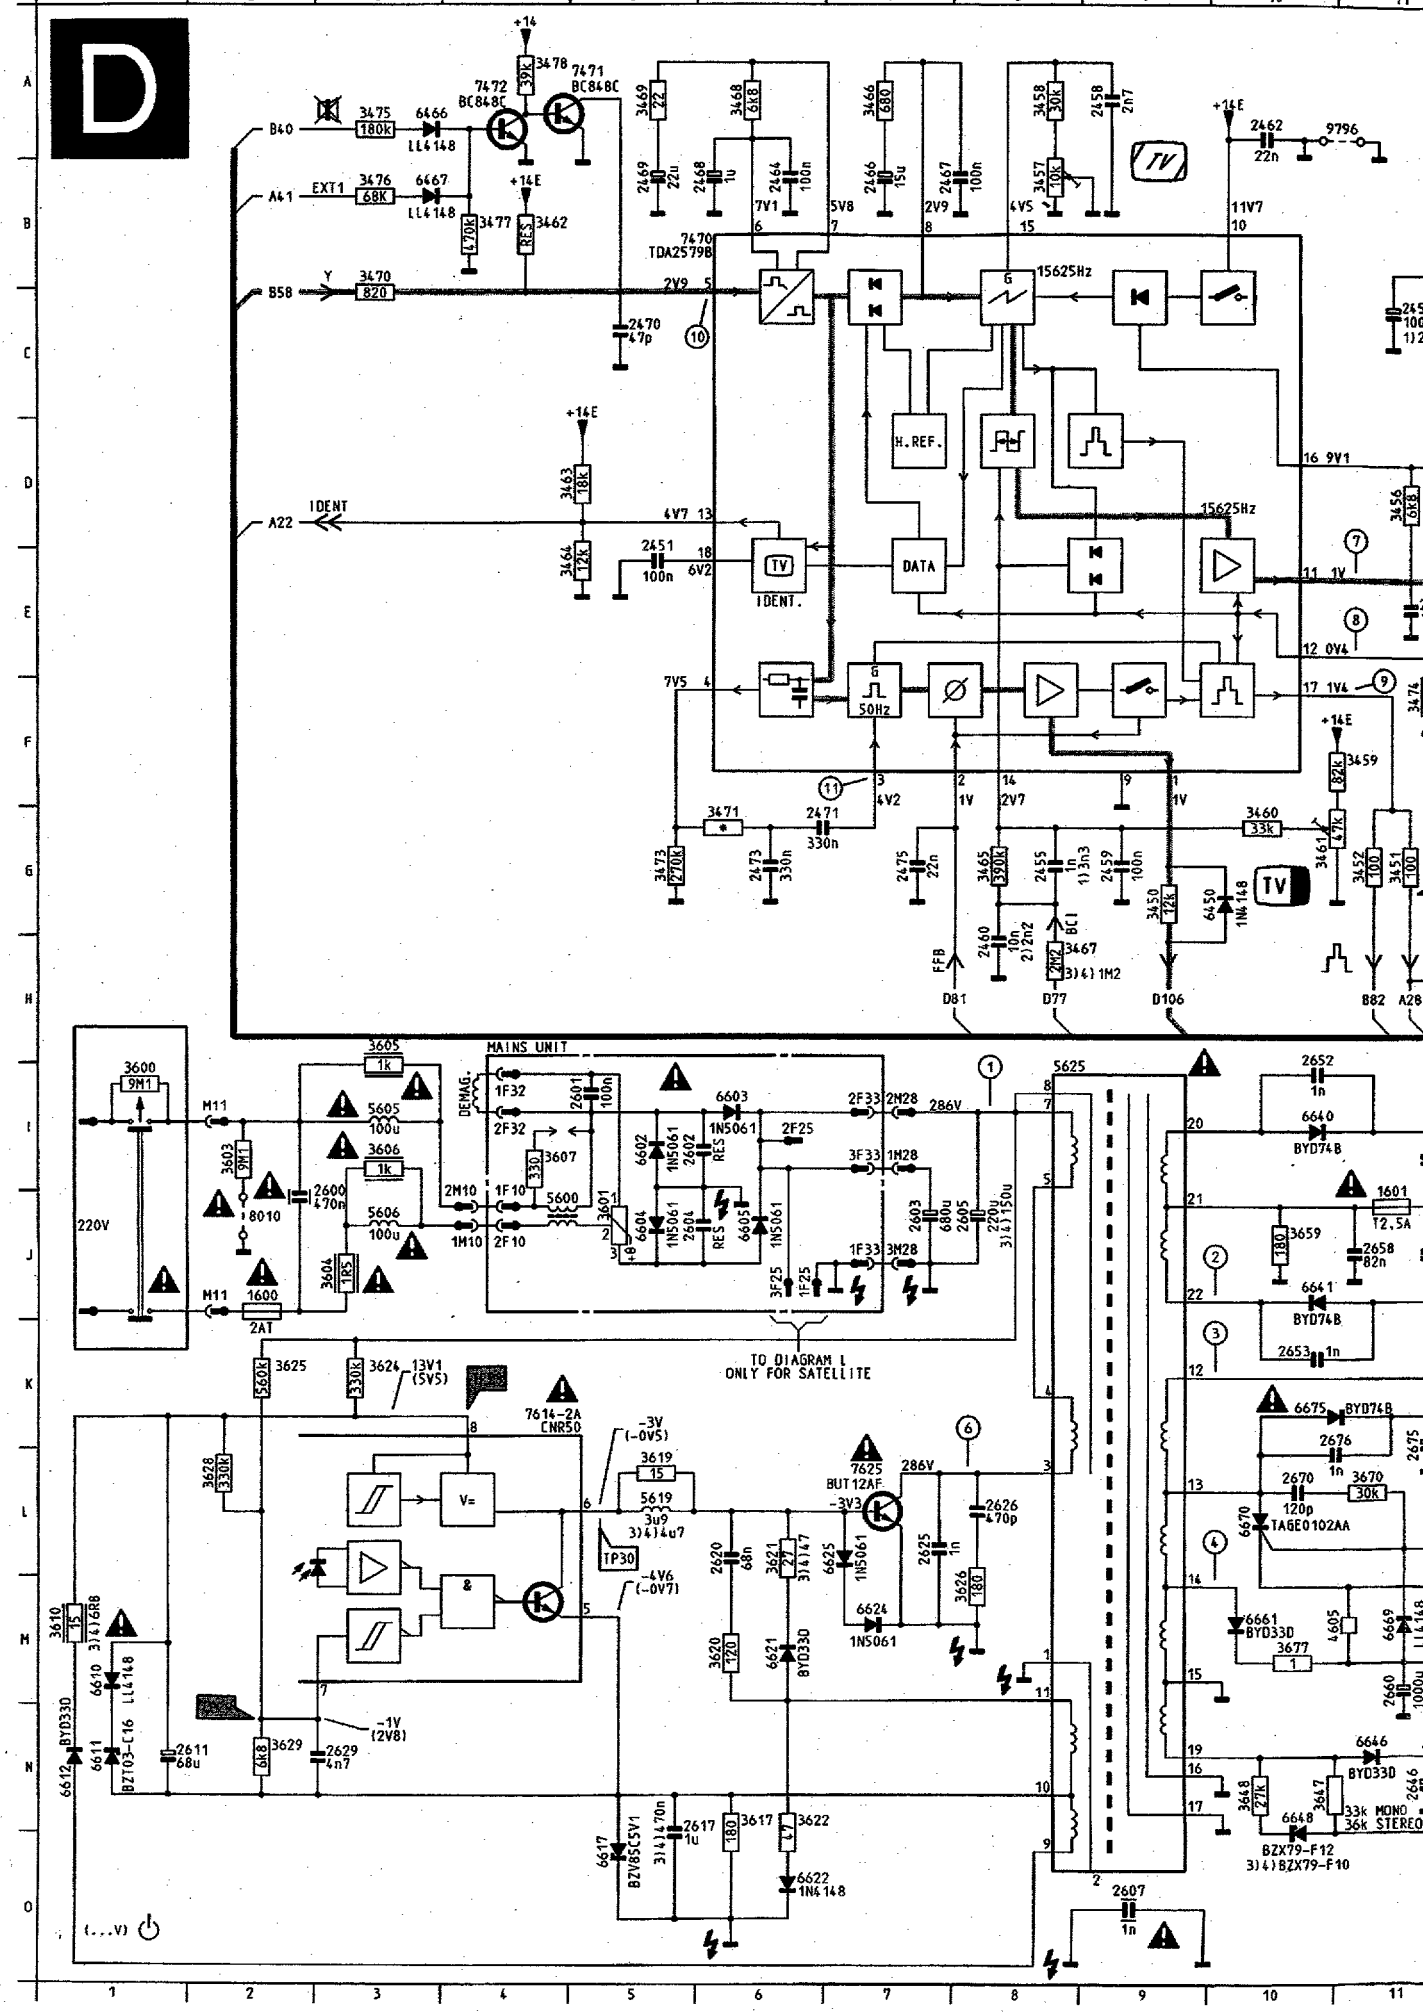

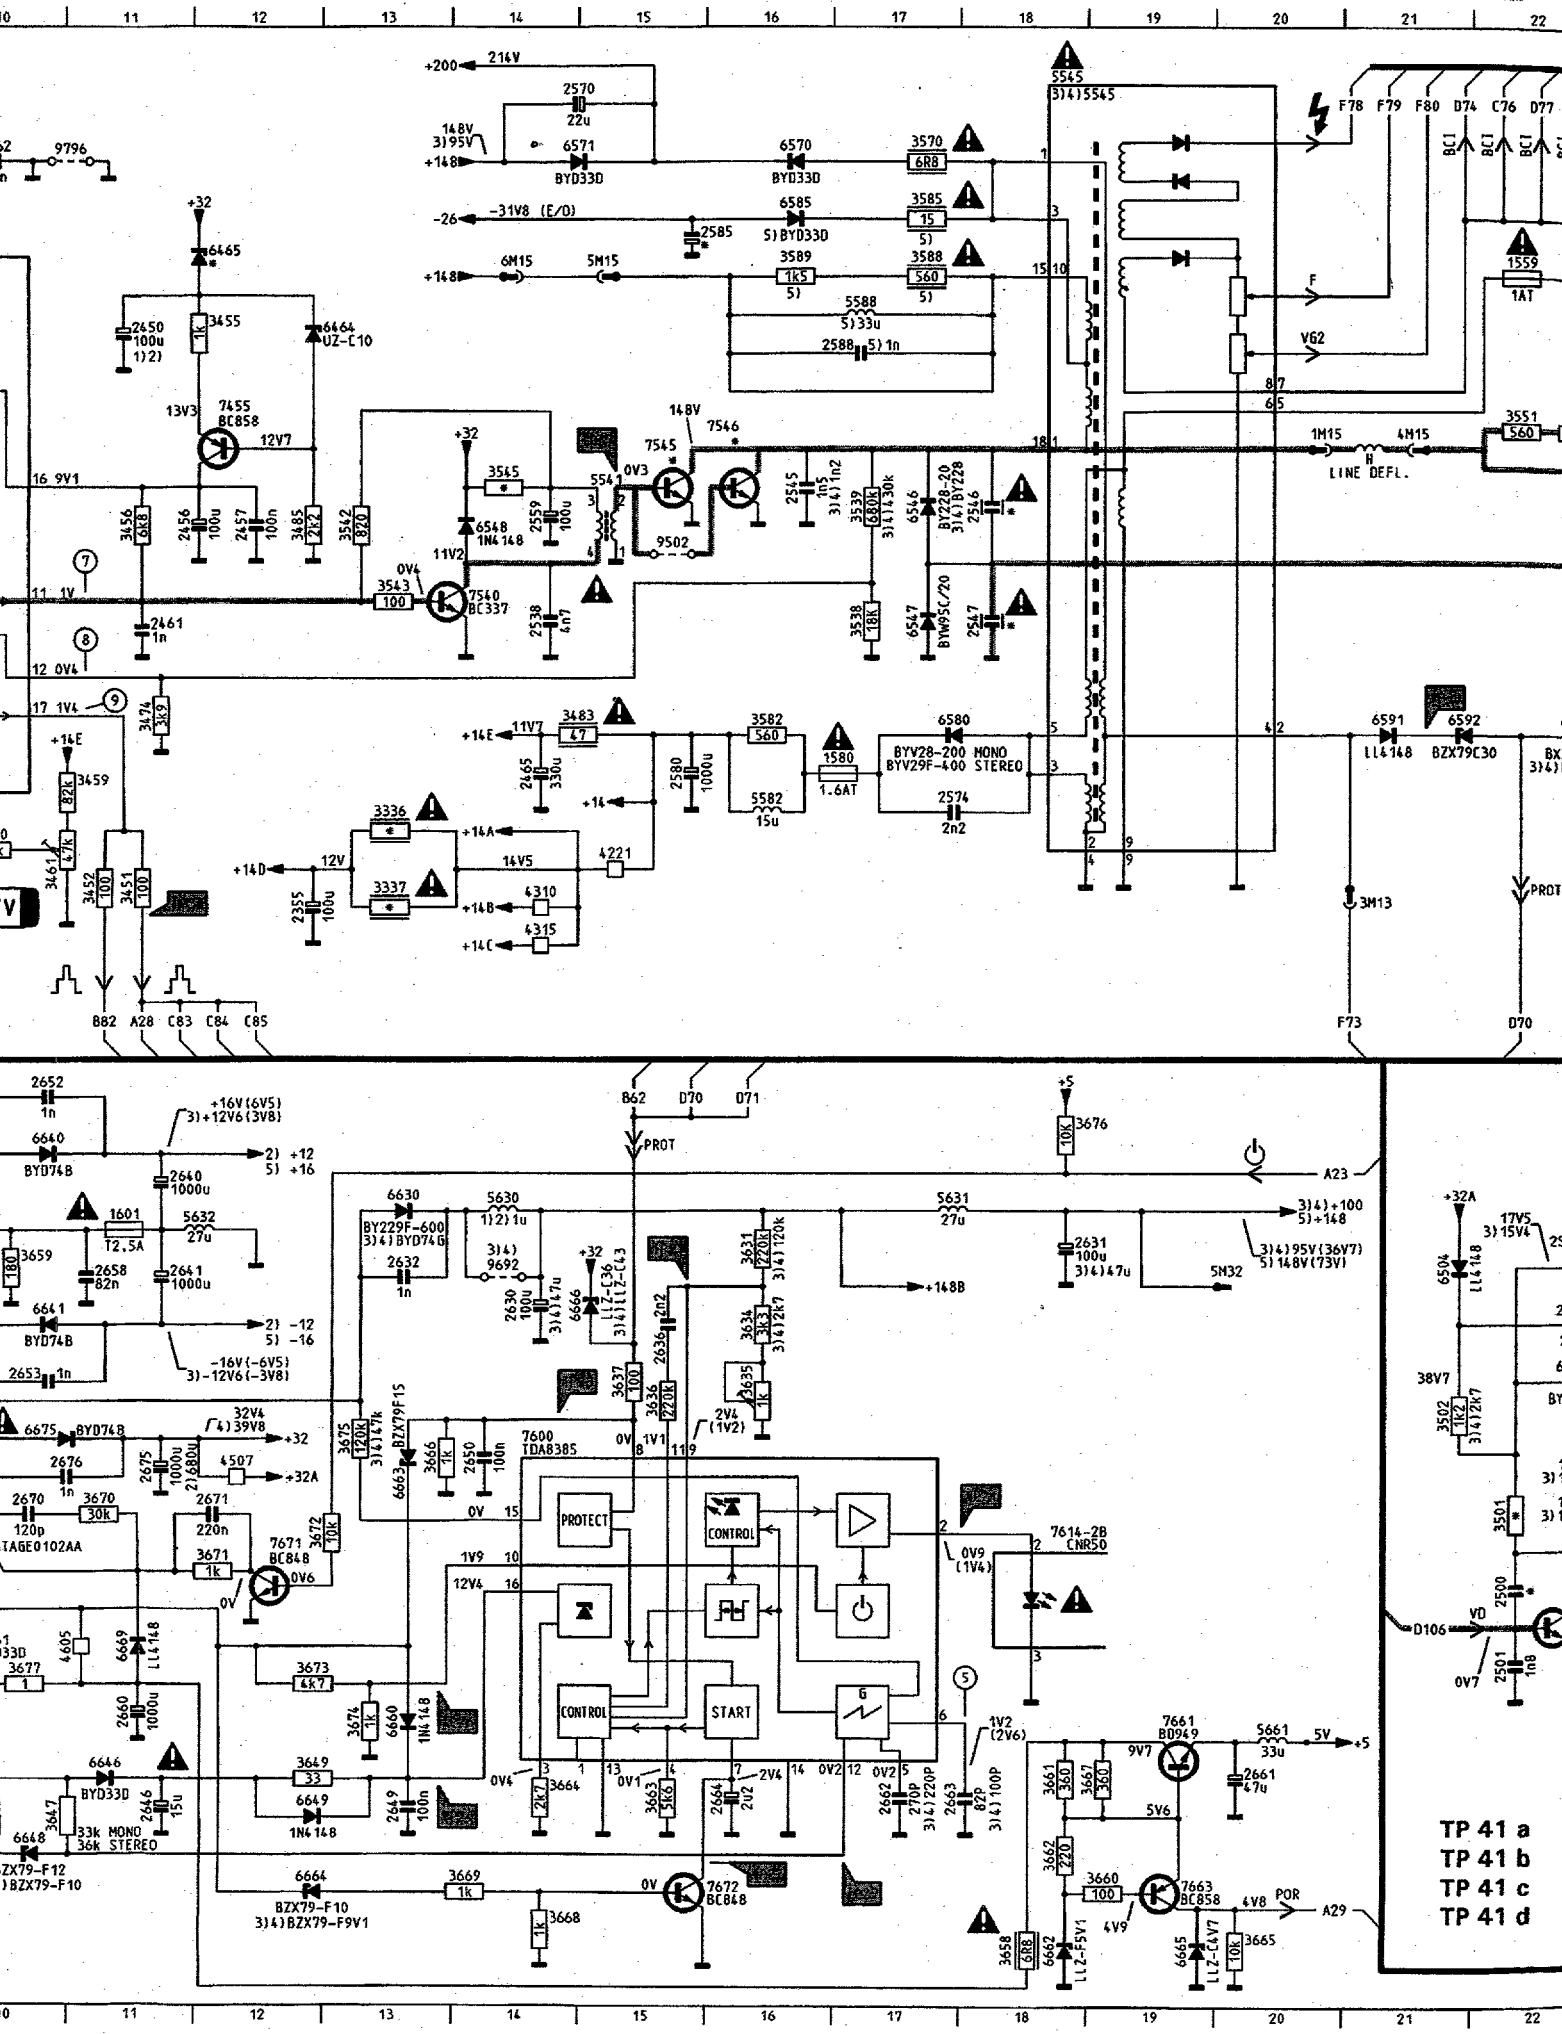
TP 41 a
TP 41 b
TP 41 c
TP 41 d
PROTECT
CONTROL
START
LINE DEFL.
BYV28-200 MONO
BYV29F-400 STEREO
7600 TDA8385
B82 A28 C83 C84 C85
F73 D70
B62 D70 D71
PROT
A23
A29
POR

Synchronization / Synchronisation

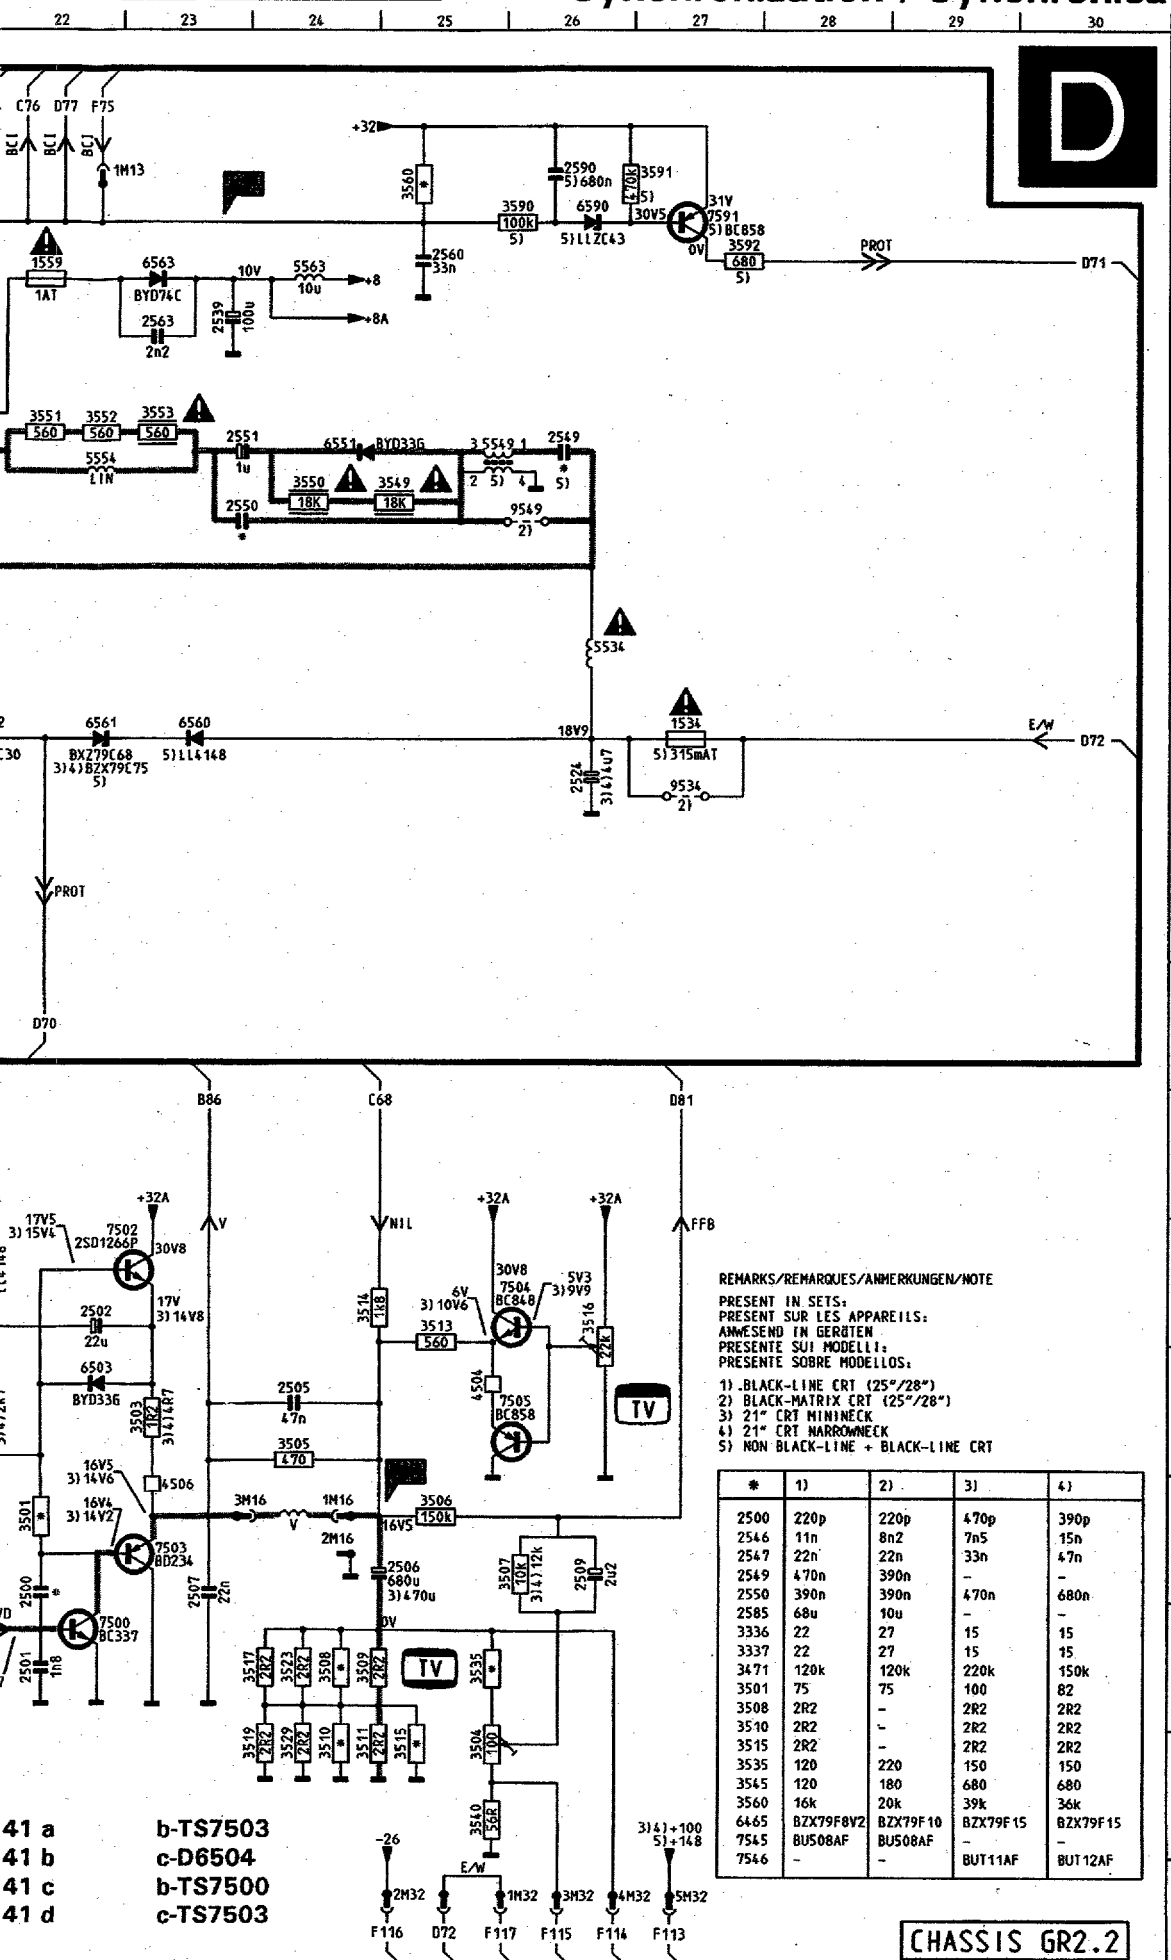

*	1)	2)	3)	4)
2500	220p	220p	470p	390p
2546	11n	8n2	7n5	15n
2547	22n	22n	33n	47n
2549	470n	390n	-	-
2550	390n	390n	470n	680n
2585	68u	10u	-	-
3336	22	27	15	15
3337	22	27	15	15
3471	120k	120k	220k	150k
3501	75	75	100	82
3508	2R2	-	2R2	2R2
3510	2R2	-	2R2	2R2
3515	2R2	-	2R2	2R2
3535	120	220	150	150
3545	120	180	680	680
3560	16k	20k	39k	36k
6465	BZX79F8V2	BZX79F10	BZX79F15	BZX79F15
7545	BU508AF	BU508AF	-	-
7546	-	-	BUT11AF	BUT12AF

1534	F27	3552	C22	6649	N12
1559	B22	3553	C23	6660	M13
1580	F17	3560	B25	6661	M10
1600	J 2	3570	A17	6662	O18
A 1601	J11	3582	F16	6663	K13
2355	G12	3585	B17	6664	O12
2450	C11	3588	B17	6665	O19
2451	E 5	3589	B16	6666	J15
2455	G 8	3590	B26	6669	M11
2456	D11	3591	A27	6670	L10
2457	D12	3592	B27	6675	K10
2458	A 9	3600	I 1	7455	C12
B 2459	G 9	3601	J 5	7470	B 6
2460	H 8	3603	I 2	7471	A 5
2461	E11	3604	J 3	7472	A 4
2462	A10	3605	H 3	7540	E14
2464	B 6	3606	I 3	7545	D15
2465	F14	3607	I 4	7546	C16
2466	B 7	3610	M 1	7591	B27
2467	B 7	3617	M 6	7600	K14
C 2468	B 6	3619	L 5	7614	K 5
2469	B 5	3620	M 6	7614	L19
2470	C 5	3621	L 6	7625	L 7
2471	G 6	3622	N 6	7661	M19
2473	G 6	3624	K 3	7663	O19
2475	G 7	3625	K 2	7671	L12
2524	F26	3626	M 8	7672	O16
D 2538	E14	3628	L 2	8010	J 2
2539	C23	3629	N 2	9502	D15
2545	D16	3631	J16	9534	F27
2546	D18	3634	J16	9549	D26
2547	E18	3635	K16	9692	J14
2549	D26	3636	K15	9796	A11
2550	D23	3637	K15		
2551	D23	3647	N10		
E 2559	D14	3648	N10		
2560	B25	3649	N12		
2563	C23	3658	O18		
2570	A14	3659	J10		
2574	F17	3660	O19		
2580	F15	3661	N18		
2585	B15	3662	N18		
F 2588	C17	3663	N15		
2590	A26	3664	N14		
2600	J 2	3665	O20		
2601	I 5	3666	K13		
2602	I 5	3667	N19		
2603	J 7	3668	O14		
2604	J 5	3669	O14		
2605	J 8	3670	L11		
G 2607	O 9	3671	L12		
2611	N 1	3672	L12		
2617	N 5	3673	M12		
2620	L 6	3674	M13		
2625	L 7	3675	K13		
2626	L 8	3676	I18		
2629	N 3	3677	M10		
H 2630	J14	4221	G15		
2631	J18	4310	G14		
2632	J13	4315	G14		
2636	J15	4507	K12		
2640	I11	4605	M11		
2641	J11	5534	E26		
2646	N11	5541	D15		
2649	N13	5545	A18		
I 2650	K14	5545	A18		
2652	I10	5549	D25		
2653	K10	5554	D22		
2658	J11	5563	B24		
2660	M11	5582	F16		
2661	N20	5588	B17		
2662	N17	5600	J 4		
J 2663	N17	5605	I 3		
2664	N16	5606	J 3		
2670	L10	5619	L 5		
2671	L12	5625	I 8		
2675	K11	5630	I14		
2676	K11	5631	I17		
3336	F13	5632	J12		
3337	G13	5661	N20		
K 3450	G 9	6450	G10		
3451	G11	6464	C12		
3452	G11	6465	B12		
3455	C12	6466	A 3		
3456	D11	6467	B 3		
3457	B 8	6546	D17		
3458	A 8	6547	E17		
3459	F11	6548	D14		
L 3460	G10	6551	D24		
3461	G10	6560	F23		
3462	B 4	6561	F22		
3463	D 5	6563	B23		
3464	E 5	6570	A16		
3465	G 8	6571	A14		
3466	A 7	6580	F17		
M 3467	H 8	6585	B16		
3468	A 6	6590	B26		
3469	A 5	6591	F21		
3470	B 3	6592	F21		
3471	G 6	6602	I 5		
3473	G 5	6603	I 6		
3474	F11	6604	J 5		
N 3475	A 3	6605	J 6		
3476	B 3	6610	M 1		
3477	B 4	6611	N 1		
* 3478	A 4	6612	N 1		
3483	F14	6617	O 5		
3485	D12	6621	M 6		
3538	E17	6622	O 6		
3539	O17	6624	M 7		
3542	D13	6625	L 7		
O 3543	E13	6630	I13		
3545	D14	6640	I10		
3549	D25	6641	J10		
3550	D24	6646	N11		
3551	C22	6648	N10		



TP 21
0,5 V/div DC
5 µS/div



TP 26 ⏱
0,1 V/div AC
5 mS/div



TP 30
2 V/div DC
5 µS/div



TP 41 a
5 V/div AC
5 mS/div



TP 21 ⏱
0,5 V/div DC
10 µS/div



TP 27
1 V/div DC



TP 30 ⏱
1 V/div DC
10 mS/div

TP 41 b
5 V/div AC
5 mS/div



TP 22
1 V/div DC



TP 27 ⏱
50 mV/div AC
10 mS/div



TP 31
2 V/div DC
20 µS/div



TP 41 c
0,1 V/div AC
5 mS/div



TP 23
1 V/div DC



TP 28
0,5 V/div AC
5 µS/div



TP 36
0,2 V/div AC
5 mS/div

TP 41 d
5 V/div AC
5 mS/div



TP 24
5V/div DC



TP 28 ⏱
1 /div AC
10 mS/div



TP 37
2 V/div AC
20 µS/div



TP 25
0,2 V/div AC
5 µS/div



TP 29
0,5 V/div AC
5 µS/div



TP 38
20 mV/div AC
20 µS/div



TP 26
1 V/div DC



TP 29 ⏱
1 V/div AC
10 mS/div



TP 41
2 V/div AC
5 mS/div

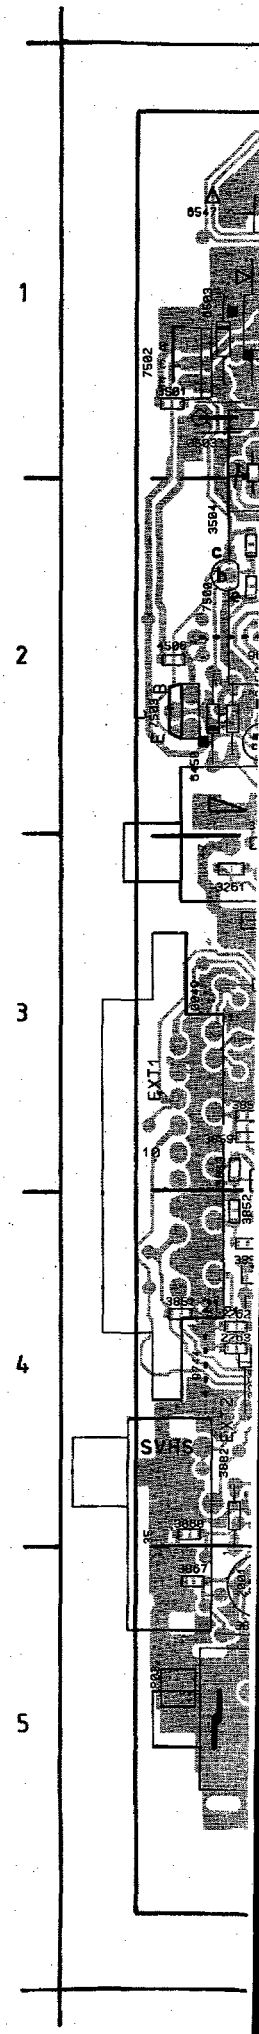

Monocarrier / Hauptplatine / Châssis

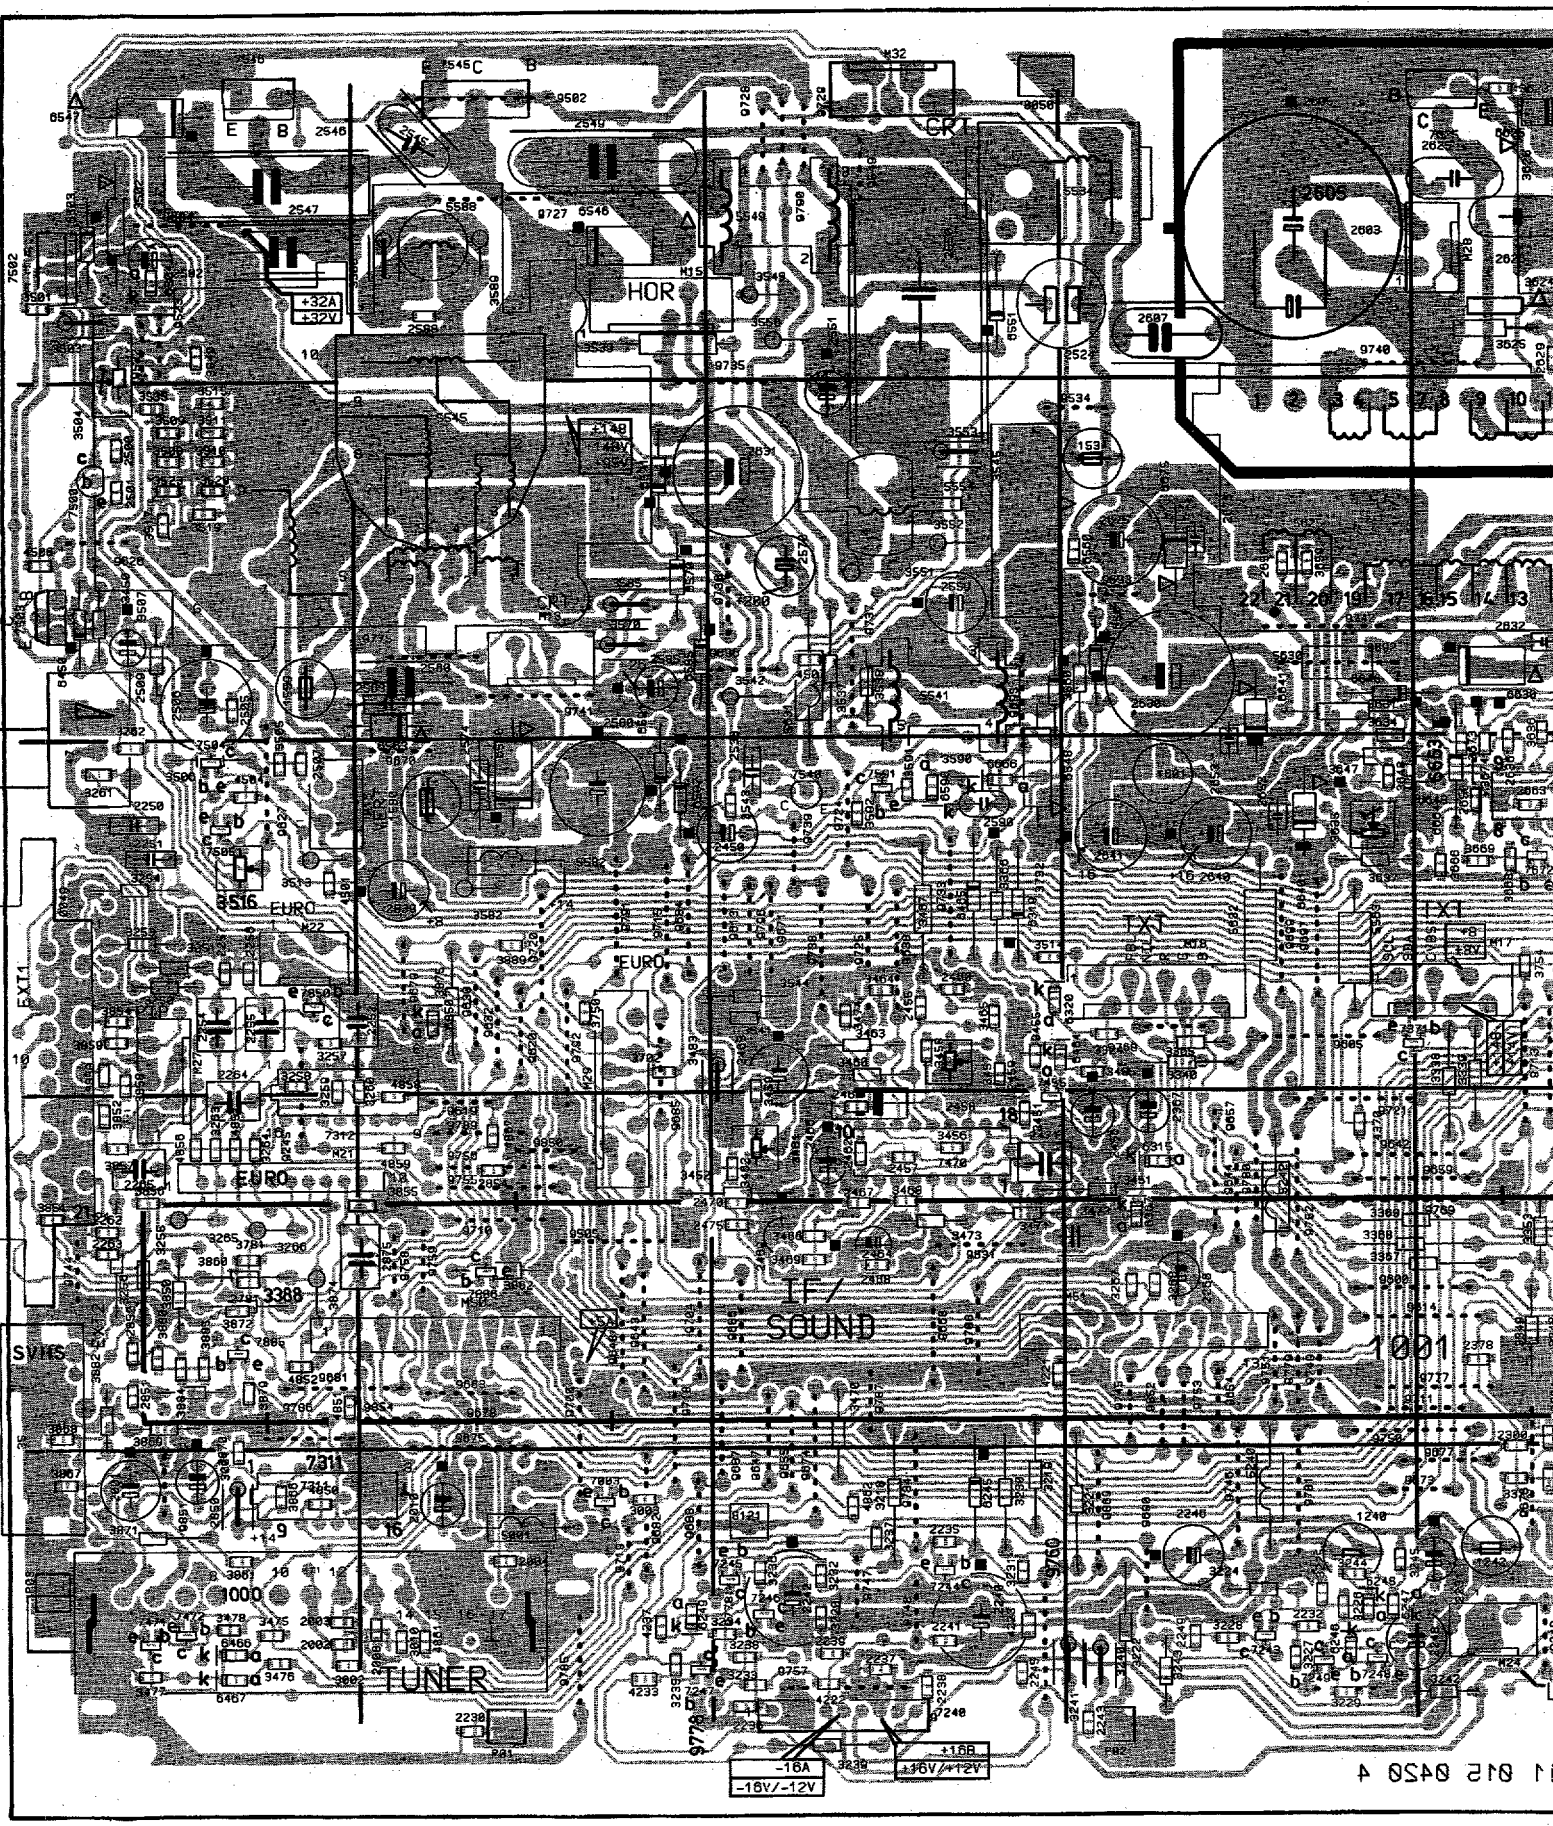

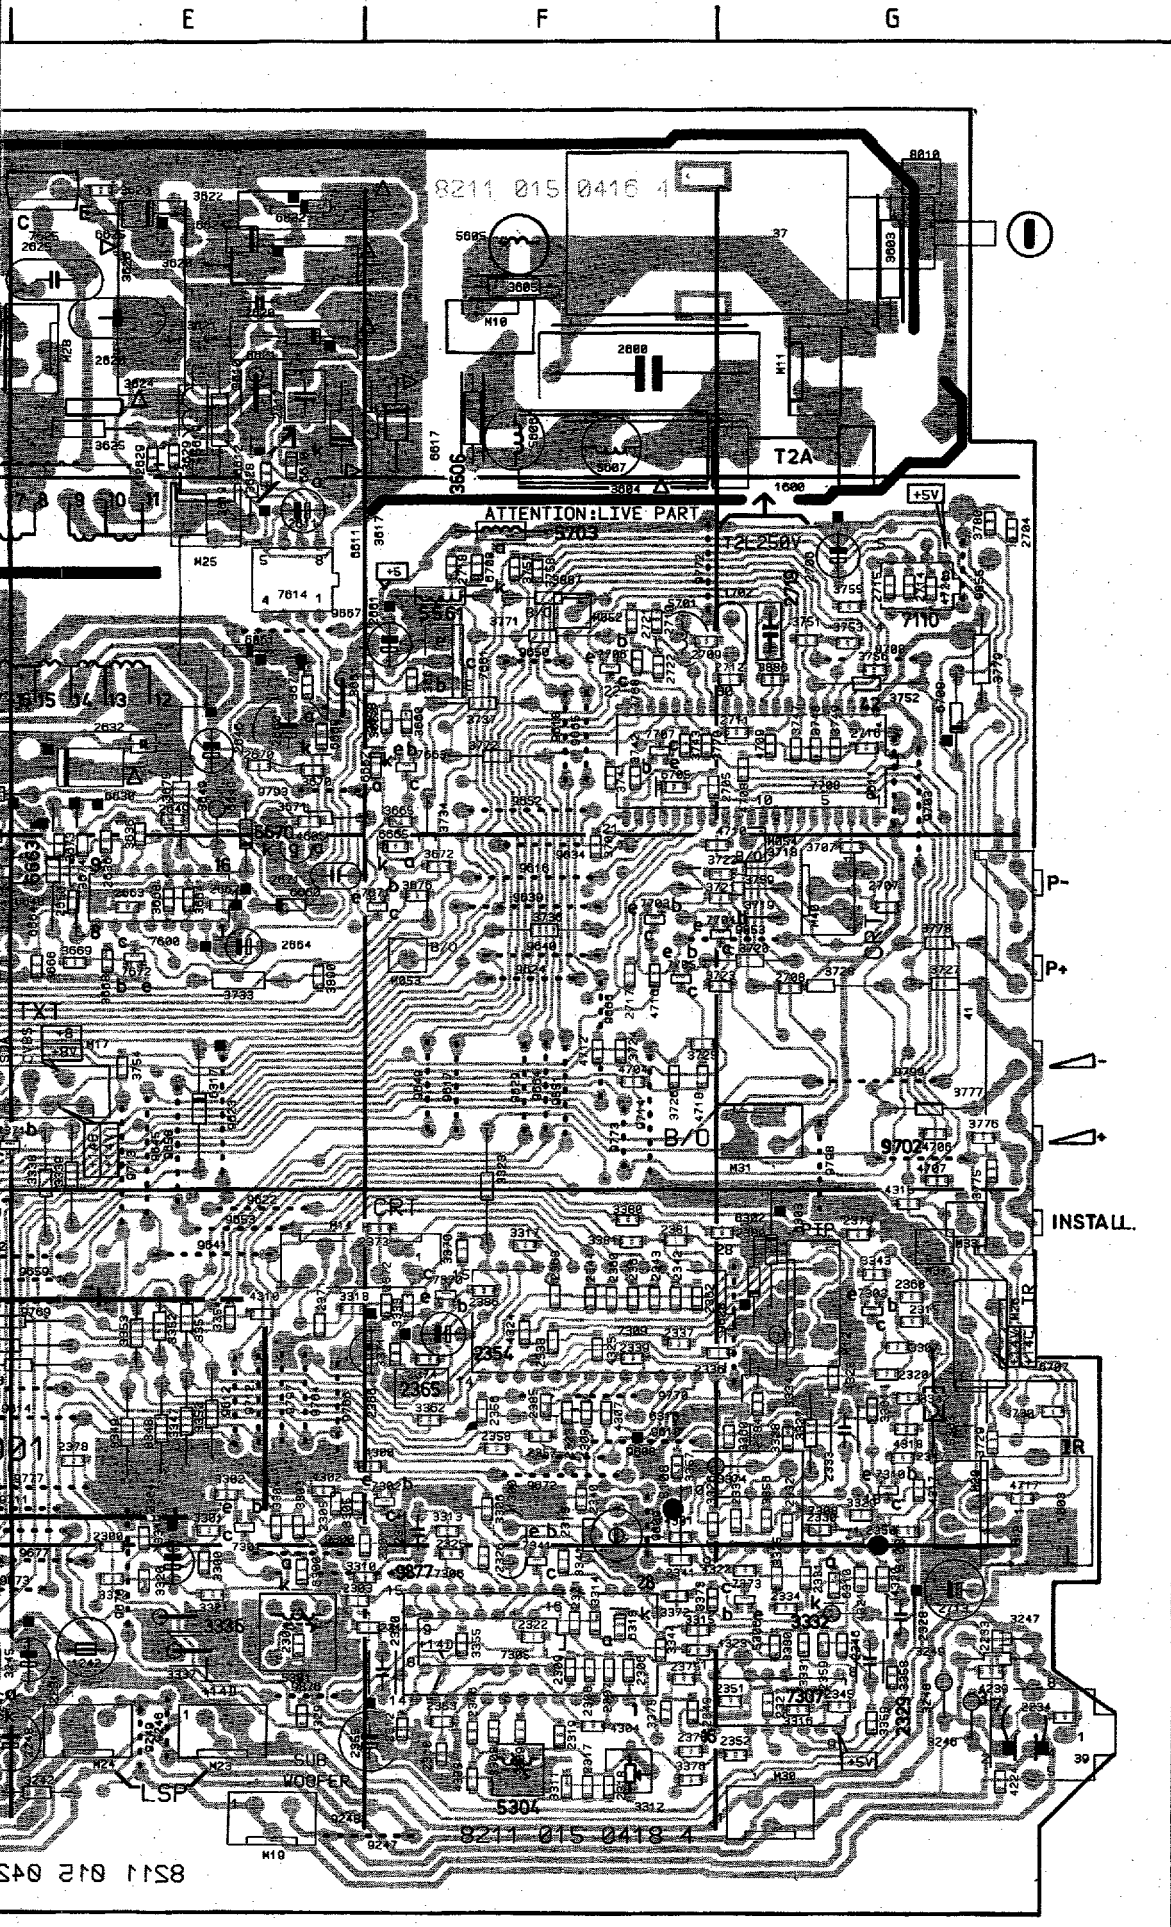

	M10 F1	2341 F5	2712 F2	3358 G
	M11 G1	2342 F4	2713 G5	3359 G
	M12 G4	2343 F4	2714 G2	3360 F
	M13 B2	2344 F4	2715 G2	3361 G
	M14 E4	2345 G5	2716 G2	3362 F
	M15 B1	2346 G5	2717 F3	3365 D
	M16 A3	2347 G4	2718 F2	3366 C
	M17 D3	2349 F5	2719 F2	3367 D
	M18 C3	2350 G5	2721 F2	3368 D
	M19 E5	2351 F5	2722 F2	3369 D
	M20 G4	2352 F5	2781 A4	3370 F
	M21 A4	2353 F5	2850 A5	3371 E
	M22 A3	2354 F4	2851 A4	3372 F
	M23 E5	2355 E5	2852 A4	3373 F
	M24 E5	2356 F4	2854 B4	3374 F
	M25 E2	2357 F4	2875 A4	3375 F
	M26 G4	2358 F4	3001 A5	3376 F
1	M27 A4	2359 G5	3002 A5	3380 F
	M28 D1	2360 F4	3003 B5	3381 F
	M29 B4	2361 F4	3010 A5	3450 A
	M30 G5	2362 F4	3218 C5	3451 C
	M31 F3	2363 F4	3219 C5	3452 B
	M32 C1	2364 E5	3220 C5	3455 C
	M33 G4	2365 F4	3221 C5	3456 C
	M34 G4	2366 E4	3222 D5	3457 C
	M40 G3	2367 D4	3224 D5	3458 C
	M50 B4	2368 G4	3225 D5	3459 B
	M51 D4	2370 E5	3226 D5	3460 C
	M52 F2	2371 E4	3227 D5	3461 C
	M53 E3	2372 E4	3228 D5	3462 B
	M54 F3	2373 E4	3229 D5	3463 C
	P01 B5	2374 F4	3230 C5	3464 C
	P02 C5	2375 F5	3231 C5	3465 C
	P03 A5	2376 F5	3232 C5	3466 C
	0035 A5	2378 E4	3233 B5	3467 C
	0037 G1	2379 G4	3234 B5	3468 C
	0039 G5	2380 F4	3235 B5	3469 C
	0041 G3	2381 F4	3236 B5	3470 C
	0049 A4	2384 F4	3237 C5	3471 C
2	1000 A5	2385 F4	3238 B5	3473 C
	1003 G5	2386 F4	3239 C5	3474 C
	1240 D5	2450 B3	3240 C5	3475 A
	1242 E5	2451 C4	3241 C5	3476 A
	1300 F5	2455 C3	3242 D5	3477 A
	1534 C2	2456 C4	3243 D5	3478 A
	1559 A2	2457 C4	3244 D5	3483 B
	1560 B3	2458 C4	3245 D5	3485 C
	1600 G2	2459 C4	3246 G5	3501 A
	1601 D3	2460 C3	3247 G5	3502 A
	1702 F2	2461 C4	3248 G5	3503 A
	2001 A5	2462 C4	3249 G5	3504 A
	2002 A5	2464 C4	3250 A3	3505 A
	2003 A5	2465 C4	3251 A3	3506 A
	2004 B5	2466 C4	3253 A3	3507 A
	2008 A5	2467 C4	3254 A3	3508 A
	2010 B5	2468 C4	3255 A4	3509 A
	2230 B5	2469 C4	3256 A4	3510 A
	2231 D5	2470 B4	3257 A3	3511 A
	2232 D5	2471 C4	3258 A4	3513 A
	2233 G5	2473 C4	3259 A4	3514 C
	2234 G5	2475 B4	3260 A4	3515 A
	2235 C5	2500 A2	3261 A3	3516 A
3	2236 B5	2501 A2	3262 A3	3517 A
	2237 C5	2502 A1	3263 A4	3519 A
	2238 C5	2505 A3	3264 A4	3523 A
	2239 C5	2506 A3	3265 A4	3529 A
	2240 C5	2507 A3	3266 A4	3535 A
	2241 C5	2509 A2	3267 D4	3537 C
	2242 C5	2524 C1	3268 D4	3538 C
	2243 C5	2538 B3	3300 E5	3539 B
	2245 C5	2539 A3	3301 E5	3540 A
	2246 D5	2545 A1	3302 E4	3541 B
	2248 D5	2546 A1	3303 E5	3542 B
	2249 D5	2547 A1	3304 E5	3543 B
	2250 A3	2549 B1	3305 E4	3544 B
	2251 A3	2550 C1	3306 F4	3545 C
	2252 A3	2551 C2	3307 G4	3549 C
	2254 A3	2559 C2	3308 F5	3550 C
	2255 A3	2560 B2	3309 F5	3551 C
	2256 A3	2563 A3	3310 E5	3552 C
	2257 A3	2570 C2	3311 F5	3553 C
	2262 A4	2574 B3	3312 F5	3560 C
	2263 A4	2580 B3	3313 F5	3570 B
4	2264 A4	2585 B2	3314 F5	3582 B
	2265 A4	2588 B1	3315 F5	3585 B
	2266 D4	2590 C3	3316 G5	3588 A
	2300 E5	2600 F1	3317 F4	3589 B
	2301 E5	2603 D1	3318 E4	3590 C
	2303 E5	2605 D1	3319 E5	3591 C
	2304 E5	2607 D1	3320 E5	3592 C
	2305 E4	2611 E2	3321 E5	3603 G
	2306 F5	2617 E1	3322 E5	3604 F
	2307 F5	2620 E1	3323 F4	3605 F
	2308 F5	2625 D1	3324 C3	3606 F
	2309 F5	2626 E1	3325 G5	3610 E
	2310 F5	2629 E2	3326 F5	3617 E
	2311 E5	2630 D2	3327 G4	3619 E
	2312 E5	2631 C2	3328 G4	3620 E
	2313 F5	2632 E2	3329 G5	3621 E
	2314 E5	2636 E3	3330 G5	3622 E
	2315 G4	2640 D3	3331 G5	3623 E
	2316 F5	2641 D3	3332 G5	3624 E
	2317 F5	2646 E2	3333 E4	3625 E
	2318 F5	2649 E3	3334 G4	3626 E
	2319 F5	2650 E3	3335 F4	3628 E
5	2320 G4	2652 D3	3336 E5	3629 E
	2321 F5	2653 D3	3337 E5	3631 D
	2322 F5	2658 D2	3338 D4	3634 D
	2323 F4	2660 E2	3339 E4	3635 D
	2325 F5	2661 E2	3340 D4	3636 E
	2326 F5	2662 E3	3341 F5	3637 D
	2327 F5	2663 E3	3342 G4	3647 D
	2328 G5	2664 E3	3343 G4	3648 D
	2329 G5	2670 E2	3344 F5	3649 E
	2330 G5	2671 E3	3347 E4	3658 E
	2331 G5	2675 D2	3348 E4	3659 D
	2332 G5	2676 D2	3349 E4	3660 E
	2333 G4	2704 G2	3350 E4	3661 E
	2334 G5	2705 F2	3351 E4	3662 E
	2335 F5	2706 G2	3352 E4	3663 E
	2336 F4	2707 G3	3353 E4	3664 E
	2337 F4	2708 G3	3354 E4	3665 E
	2338 F4	2709 F2	3355 F5	3666 D
	2339 F4	2710 F2	3356 F5	3667 E
	2340 F4	2711 F2	3357 F4	3668 E

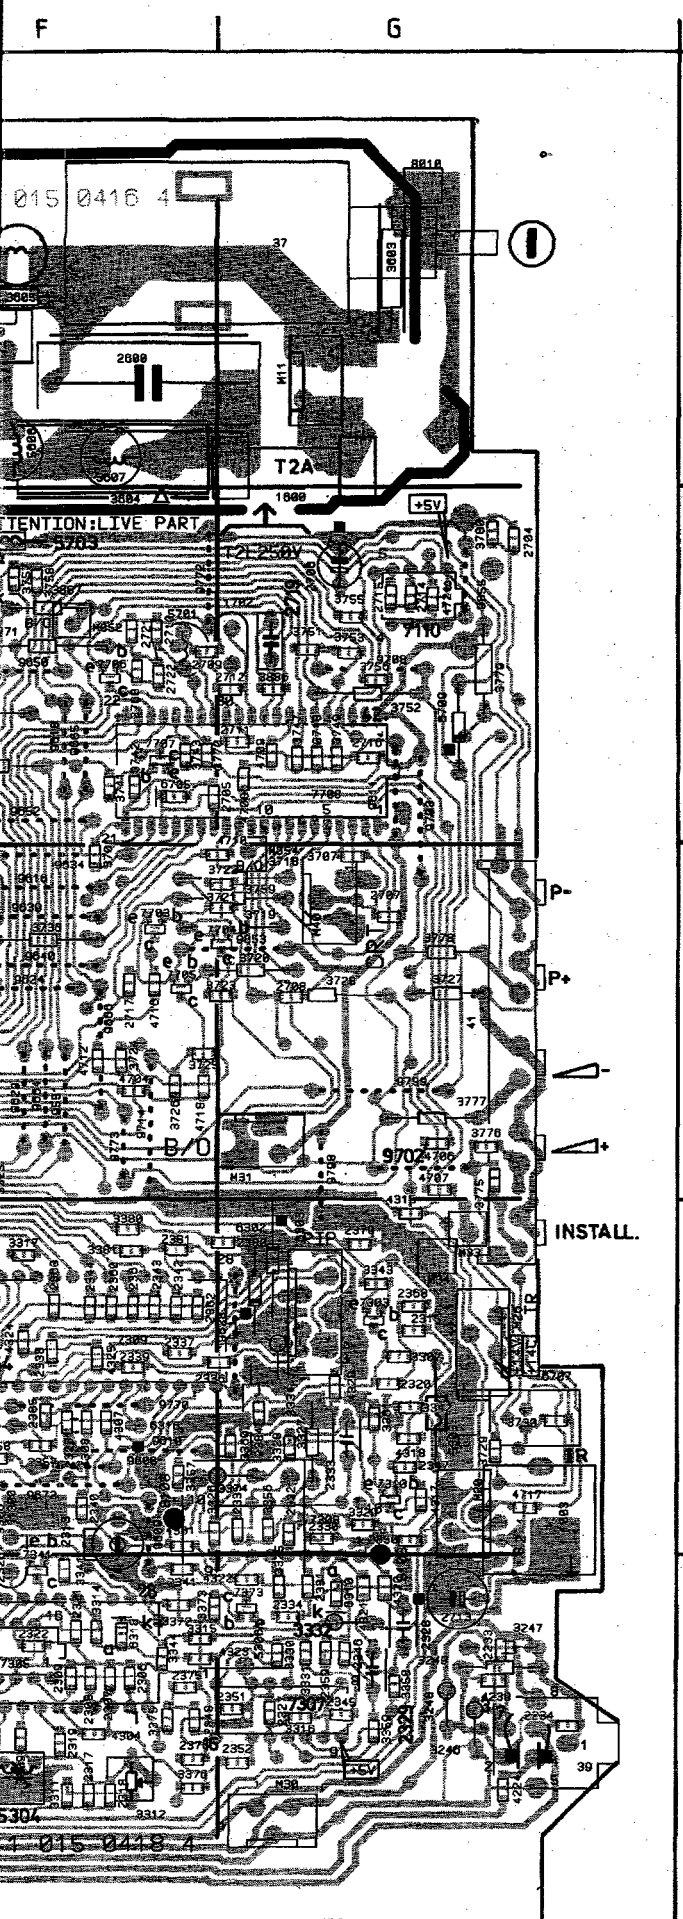

CHASSIS GR2.2			6.21		6.22	CHASSIS GR2.2	
M10 F1	2341 F5	2712 F2	3358 G5	3669 E3	4706 G3	7306 F5	9695 C3
M11 G1	2342 F4	2713 G5	3359 G5	3670 E2	4707 G4	7307 F5	9696 B2
M12 G4	2343 F4	2714 G2	3360 F4	3671 E3	4708 F2	7308 G5	9697 D3
M13 B2	2344 F4	2715 G2	3361 G4	3672 F3	4709 F2	7309 F4	9699 D3
M14 E4	2345 G5	2716 G2	3362 F4	3673 D3	4710 F3	7310 G4	9700 B5
M15 B1	2346 G5	2717 F3	3365 D3	3674 E3	4712 F3	7311 A5	9702 G4
M16 A3	2347 G4	2718 F2	3366 C3	3675 E3	4716 F3	7312 A4	9703 G3
M17 D3	2349 F5	2719 F2	3367 D4	3676 E3	4717 G4	7341 F5	9704 B4
M18 C3	2350 G5	2721 F2	3368 D4	3677 E2	4718 F3	7370 F4	9708 G2
M19 E5	2351 F5	2722 F2	3369 D4	3701 F3	4721 G2	7371 D3	9710 B4
M20 G4	2352 F5	2781 A4	3370 F4	3702 B4	4850 A5	7373 F5	9711 D4
M21 A4	2353 F5	2850 A5	3371 E4	3707 G3	4851 A4	7455 C4	9712 E4
M22 A3	2354 F4	2851 A4	3372 F5	3718 F3	4852 A4	7470 C4	9713 E4
M23 E5	2355 E5	2852 A4	3373 F5	3719 F3	4856 A4	7471. A5	9714 F3
M24 E5	2356 F4	2854 B4	3374 F4	3720 F3	4857 A4	7472 A5	9715 B3
M25 E2	2357 F4	2875 A4	3375 F5	3721 F3	4858 A4	7500 A2	9718 B5
M26 G4	2358 F4	3001 A5	3376 F5	3722 F3	4859 A4	7502 A1	9719 B5
1 M27 A4	2359 G5	3002 A5	3380 F4	3723 F3	4861 B5	7503 A2	9720 B3
M28 D1	2360 F4	3003 B5	3381 F4	3724 F3	4862 C5	7504 A3	9721 D4
M29 B4	2361 F4	3010 A5	3450 A2	3725 F3	4867 B4	7505 A3	9724 C3
M30 G5	2362 F4	3218 C5	3451 C4	3726 F3	5001 B5	7540 C3	9725 C3
M31 F3	2363 F4	3219 C5	3452 B4	3727 G3	5240 D5	7545 B1	9727 B1
M32 C1	2364 E5	3220 C5	3455 C3	3728 G3	5242 D4	7546 A1	9728 C1
M33 G4	2365 F4	3221 C5	3456 C4	3729 G4	5301 E5	7591 C3	9729 C1
M34 G4	2366 E4	3222 D5	3457 C4	3730 G4	5303 G4	7600 E3	9733 C3
M40 G3	2367 D4	3224 D5	3458 C3	3732 C3	5304 F5	7614 E2	9735 B2
M50 B4	2368 G4	3225 D5	3459 B4	3733 E3	5306 F4	7625 D1	9736 B2
M51 D4	2370 E5	3228 D5	3460 C4	3734 F3	5534 D1	7661 F2	9737 C2
M52 F2	2371 E4	3227 D5	3461 C4	3736 F3	5541 C2	7663 E2	9738 C3
M53 E3	2372 E4	3228 D5	3462 B4	3737 F2	5545 A2	7671 E3	9739 C3
M54 F3	2373 E4	3229 D5	3463 C3	3741 F2	5549 B1	7672 E3	9740 D2
P01 B5	2374 F4	3230 C5	3464 C3	3742 F2	5554 C2	7703 F3	9741 B2
P02 C5	2375 F5	3231 C5	3465 C3	3743 F2	5563 D3	7704 F3	9742 D2
P03 A5	2376 F5	3232 C5	3466 C4	3747 G2	5582 B3	7705 F3	9744 A4
0035 A5	2378 E4	3233 B5	3467 C3	3748 G2	5588 B1	7706 F2	9745 D4
0037 G1	2379 G4	3234 B5	3468 C4	3749 G2	5605 F1	7707 F2	9746 D5
0039 G5	2380 F4	3235 B5	3469 C4	3750 B3	5806 F1	7708 G3	9747 C5
0041 G3	2381 F4	3236 B5	3470 C5	3751 G2	5607 F2	7710 G2	9748 C5
0049 A4	2384 F4	3237 C5	3471 C4	3752 G2	5619 E1	7850 A3	9749 D4
1000 A5	2385 F4	3238 B5	3473 C4	3753 G2	5625 D2	7885 A4	9750 D5
2 1003 G5	2386 F4	3239 C5	3474 C3	3754 E3	5630 D2	7886 B4	9751 D4
1240 D5	2450 B3	3240 C5	3475 A5	3755 G2	5631 C2	9245 A4	9752 D4
1242 E5	2451 C4	3241 C5	3476 A5	3756 G2	5632 D3	9246 E5	9753 D5
1300 F5	2455 C3	3242 D5	3477 A5	3757 F2	5661 F2	9247 E5	9755 B4
1534 C2	2456 C4	3243 D5	3478 A5	3758 F2	5701 F2	9248 E5	9756 B4
1559 A2	2457 C4	3244 D5	3483 B4	3759 F3	5703 F2	9249 E5	9757 C5
1580 B3	2458 C4	3245 D5	3485 C4	3768 F2	6245 C5	9300 E5	9758 A4
1600 G2	2459 C4	3246 G5	3501 A1	3770 F2	6246 D5	9502 B1	9759 B4
1601 D3	2460 C3	3247 G5	3502 A1	3771 F2	6247 D5	9505 B4	9760 C5
1702 F2	2461 C4	3248 G5	3503 A1	3772 F2	6248 D5	9522 A2	9764 E4
2001 A5	2462 C4	3249 G5	3504 A2	3775 G4	6249 B5	9523 A1	9766 E4
2002 A5	2464 C4	3250 A3	3505 A3	3776 G3	6300 E5	9534 C2	9768 D3
2003 A5	2465 C4	3251 A3	3506 A3	3777 G3	6302 F4	9549 C1	9769 D4
2004 B5	2466 C4	3253 A3	3507 A2	3778 G3	6303 G4	9551 F3	9770 F4
2008 A5	2467 C4	3254 A3	3508 A2	3779 G2	6310 G5	9600 D4	9772 F2
2010 B5	2468 C4	3255 A4	3509 A2	3780 G2	6315 D4	9605 D3	9773 F3
2230 B5	2469 C4	3256 A4	3510 A2	3781 A4	6316 F4	9608 F4	9775 B2
2231 D5	2470 B4	3257 A3	3511 A2	3850 A4	6317 E3	9609 F5	9777 D4
2232 D5	2471 C4	3258 A4	3513 A3	3851 A4	6318 F5	9610 F4	9778 B5
2233 G5	2473 C4	3259 A4	3514 C3	3852 A4	6319 C3	9611 G2	9779 D4
2234 G5	2475 B4	3260 A4	3515 A2	3853 A4	6320 C3	9612 E4	9780 D4
2235 C5	2500 A2	3261 A3	3516 A3	3854 A3	6367 D4	9613 B3	9781 D5
3 2236 B5	2501 A2	3262 A3	3517 A2	3855 A4	6450 A2	9614 D4	9783 D5
2237 C5	2502 A1	3263 A4	3519 A2	3856 A4	6464 C4	9616 F3	9784 C5
2238 C5	2505 A3	3264 A4	3523 A2	3857 A4	6465 C3	9617 F3	9785 B5
2239 C5	2506 A3	3265 A4	3529 A2	3858 A4	6466 A5	9618 F2	9786 A5
2240 C5	2507 A3	3266 A4	3535 A2	3859 A3	6467 A5	9619 B4	9787 C4
2241 C5	2509 A2	3267 D4	3537 C2	3860 A4	6503 A1	9620 B3	9788 C4
2242 C5	2524 C1	3268 D4	3538 C2	3861 A5	6504 A1	9622 E4	9789 B4
2243 C5	2538 B3	3300 E5	3539 B2	3862 B4	6546 B1	9623 E3	9790 C1
2245 C5	2539 A3	3301 E5	3540 A2	3866 A5	6547 A1	9624 F3	9791 B3
2246 D5	2545 A1	3302 E4	3541 B3	3867 A5	6548 C2	9626 A2	9792 B3
2248 D5	2546 A1	3303 E5	3542 B2	3868 A5	6551 C1	9627 A3	9793 E2
2249 D5	2547 A1	3304 E5	3543 B3	3869 A5	6560 C2	9628 F4	9796 B3
2250 A3	2549 B1	3305 E4	3544 B3	3870 A5	6561 C2	9629 F3	9797 E4
2251 A3	2550 C1	3306 F4	3545 C2	3871 A5	6563 A3	9630 B3	9798 G4
2252 A3	2551 C2	3307 G4	3549 C1	3872 A4	6570 B2	9631 C4	9799 G3
2254 A3	2559 C2	3308 F5	3550 C1	3874 A4	6571 B2	9632 B3	9850 B4
2255 A3	2560 B2	3309 F5	3551 C2	3875 B3	6580 B3	9634 F3	9851 A5
2256 A3	2563 A3	3310 E5	3552 C2	3879 A4	6585 B2	9638 C3	9852 D5
2257 A3	2570 C2	3311 F5	3553 C2	3880 A4	6590 C3	9639 F3	9853 F3
2262 A4	2574 B3	3312 F5	3560 C2	3881 A4	6591 B3	9640 F3	9854 A5
2263 A4	2580 B3	3313 F5	3570 B2	3882 A5	6592 B3	9641 E4	9855 G2
2264 A4	2585 B2	3314 F5	3582 B3	3884 A4	6610 E2	9642 D4	9869 C5
4 2265 A4	2588 B1	3315 F5	3585 B2	3885 A4	6611 E1	9643 B4	9876 E5
2266 D4	2590 C3	3316 G5	3588 A1	3886 G2	6612 E2	9644 D4	9877 E5
2300 E5	2600 F1	3317 F4	3589 B1	3887 F2	6617 E1	9645 E4	
2301 E5	2603 D1	3318 E4	3590 C3	3888 A4	6621 E1	9647 C5	
2303 E5	2605 D1	3319 E5	3591 C3	3889 B3	6622 E1	9648 B4	
2304 E5	2607 D1	3320 E5	3592 C3	3890 E3	6624 E1	9649 F3	
2305 E4	2611 E2	3321 E5	3603 G1	4221 C4	6625 E1	9650 F2	
2306 F5	2617 E1	3322 E5	3604 F2	4222 C5	6630 E2	9652 F3	
2307 F5	2620 E1	3323 F4	3605 F1	4223 C5	6640 D3	9653 E4	
2308 F5	2625 D1	3324 C3	3606 F1	4224 G5	6641 D3	9654 D4	
2309 F5	2626 E1	3325 G5	3610 E1	4233 B5	6646 D2	9655 C5	
2310 F5	2629 E2	3326 F5	3617 E1	4237 B5	6648 D3	9657 D4	
2311 E5	2630 D2	3327 G4	3619 E1	4239 G5	6649 E3	9658 E3	
2312 E5	2631 C2	3328 G4	3620 E1	4300 E4	6660 E3	9659 D4	
2313 F5	2632 E2	3329 G5	3621 E1	4301 F5	6661 E2	9663 B4	
2314 E5	2636 E3	3330 G5	3622 E1	4302 E4	6662 E2	9664 F3	
2315 G4	2640 D3	3331 G5	3623 E1	4303 F5	6663 E3	9665 F2	
2316 F5	2641 D3	3332 G5	3624 E1	4304 F5	6664 D3	9666 F3	
2317 F5	2646 E2	3333 E4	3625 E1	4307 F4	6665 E3	9667 E2	
2318 F5	2649 E3	3334 G4	3626 E1	4308 F4	6666 C3	9668 C4	
2319 F5	2650 E3	3335 F4	3628 E2	4310 E4	6669 E2	9670 A3	
2320 G4	2652 D3	3336 E5	3629 E2	4315 G4	6670 E3	9671 C3	
5 2321 F5	2653 D3	3337 E5	3631 D3	4317 G4	6675 D2	9672 F4	
2322 F5	2658 D2	3338 D4	3634 D3	4318 G4	6705 F2	9673 D5	
2323 F4	2660 E2	3339 E4	3635 D3	4320 G5	6707 G4	9674 C5	
2325 F5	2661 E2	3340 D4	3636 E3	4321 G5	6708 F2	9675 B5	
2326 F5	2662 E3	3341 F5	3637 D3	4322 F5	6709 G2	9676 E5	
2327 F5	2663 E3	3342 G4	3647 D3	4323 F5	6850 B3	9677 D5	
2328 G5	2664 E3	3343 G4	3648 D3	4324 F4	7003 B5	9678 B5	
2329 G5	2670 E2	3344 F5	3649 E3	4325 F4	7240 C5	9679 A3	
2330 G5	2671 E3	3347 E4	3658 E2	4328 G4	7243 D5	9681 A4	
2331 G5	2675 D2	3348 E4	3659 D2	4329 E5	7244 C5	9682 B5	
2332 G5	2676 D2	3349 E4	3660 E2	4370 D4	7245 B5	9684 B3	
2333 G4	2704 G2	3350 E4	3661 E2	4501 A3	7246 B5	9685 B4	
2334 G5	2705 F2	3351 E4	3662 E2	4502 G2	7247 B5	9686 B4	
2335 F5	2706 G2	3352 E4	3663 E3	4504 A3	7248 D5	9687 B5	
2336 F4	2707 G3	3353 E4	3664 E3	4506 A2	7249 D5	9688 B5	
2337 F4	2708 G3	3354 E4	3665 E3	4507 C2	7301 E5	9690 D5	
2338 F4	2709 F2	3355 F5	3666 D3	4605 E3	7302 E4	9692 D2	
2339 F4	2710 F2	3356 F5	3667 E2	0047 A3	7303 G4	9693 C2	
2340 F4	2711 F2	3357 F4	3668 E3	4704 F3	7305 F5	9694 A1	

Picture tube module "narrowneck" / Bildröhren Modul "narrowneck" / Module support tube image "narrowneck"

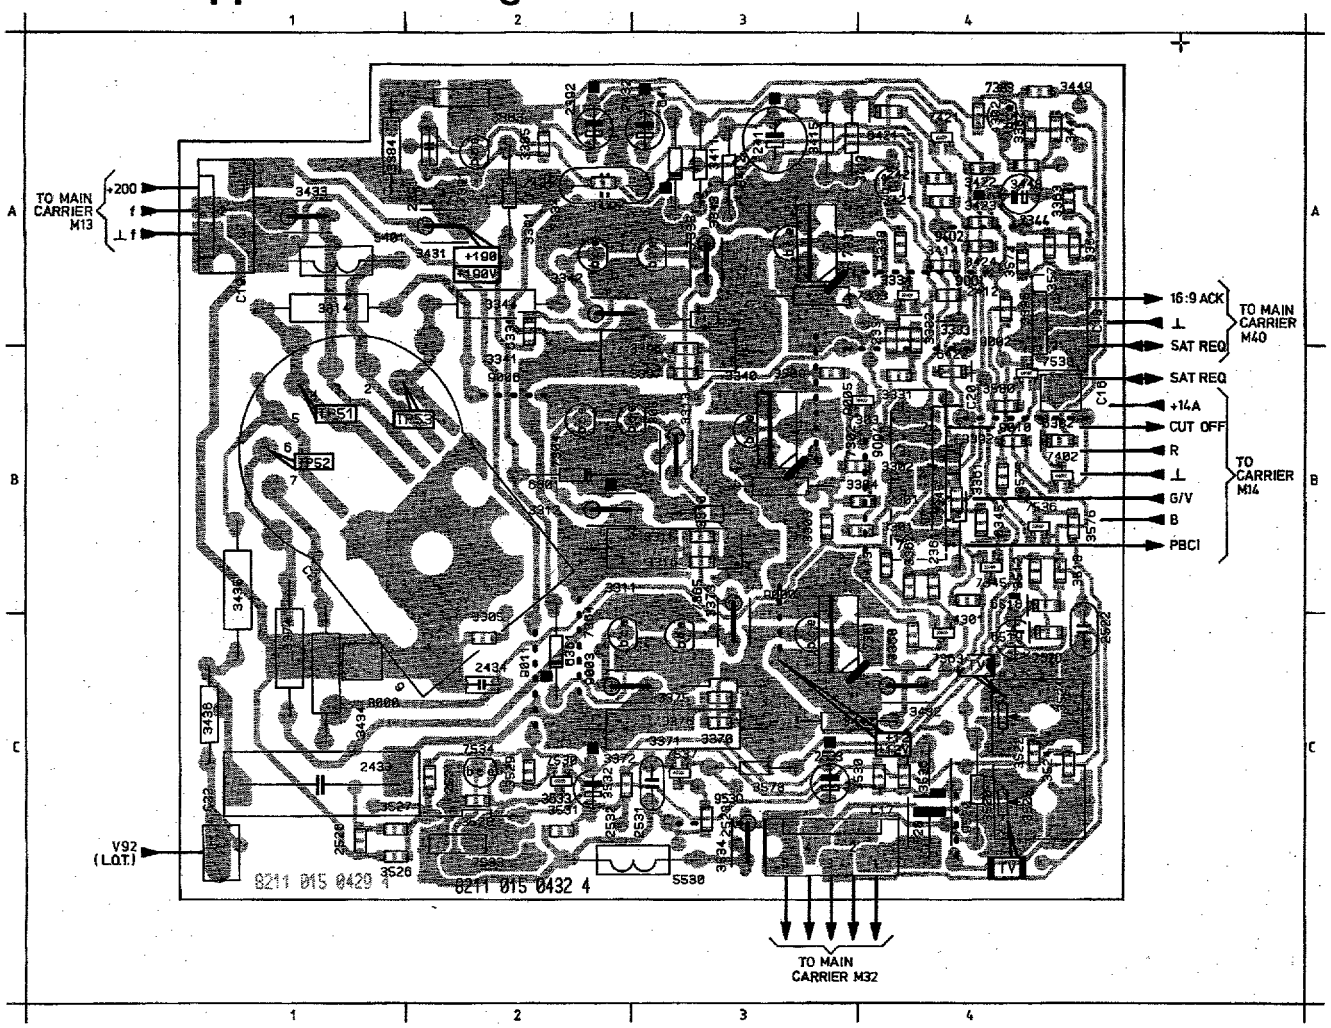

C16 B4
C18 A4
C19 A1
C20 B4
C21 B1
C22 C1
2301 B3
2331 A3
2344 A4
2361 B4
2391 A1
2392 A2
2411 A3
2412 A4
2421 A4
2431 A2
2432 A2
2433 C1
2434 C2
2520 C4
2521 C1
2522 C4
2523 C3
2526 C1
2528 C4
2531 C2
2532 C2
2533 C3
3301 B3
3302 B3
3303 B3
3304 B3
3305 C2
3309 B3
3310 B3
3311 B3
3312 B2
3313 B3
3314 A1
3315 B3
3316 B3
3331 B4
3332 A4
3333 A4
3334 A3
3338 A4
3340 A3
3341 A3
3342 A2
3343 A3
3344 A2
3345 B4
3361 B4
3362 B4
3363 A4
3364 A4
3368 C4
3370 C3

Loud speaker module
Lautsprecher Platte
Module haut parleur



Mains
Netzteil
Module



nodule "narrowneck" / Bildröhren Modul "narrowneck" / ort tube image "narrowneck"

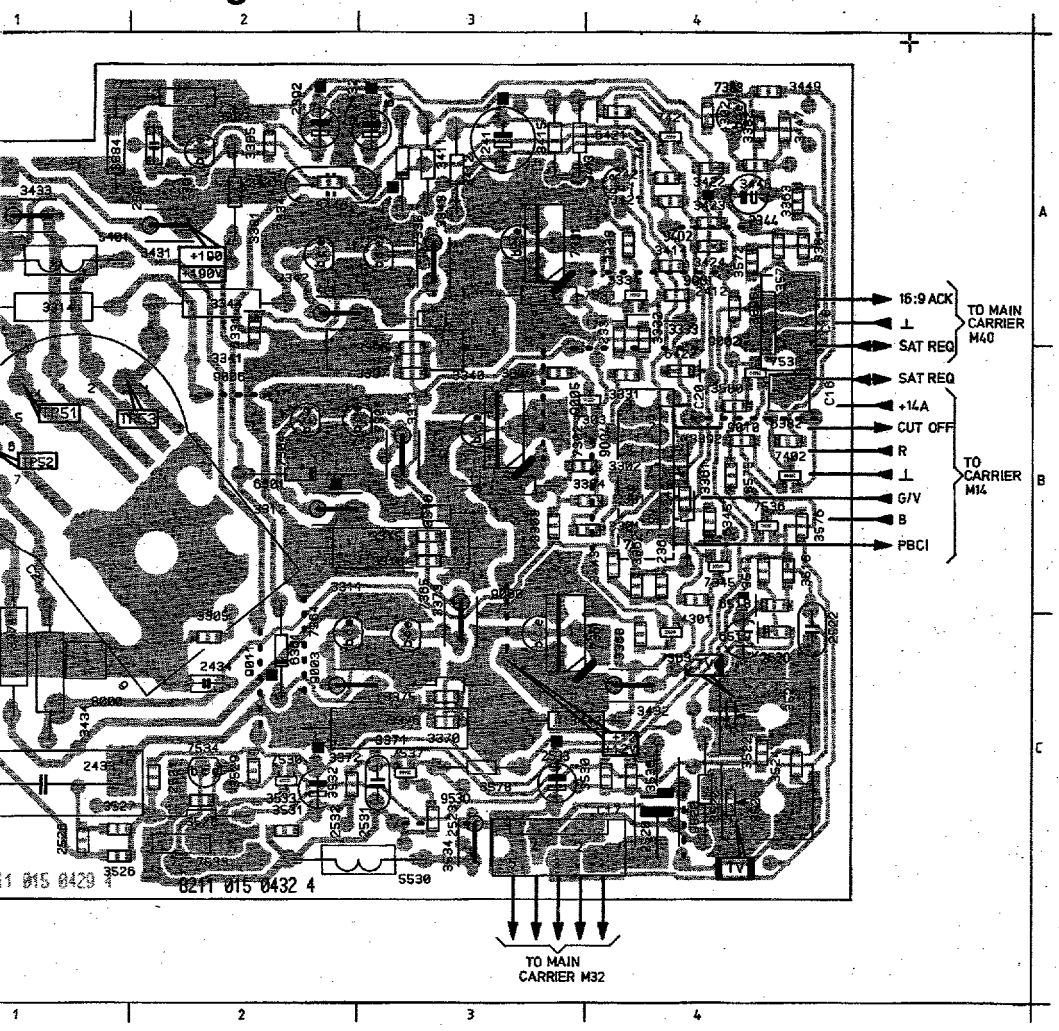

C16 B4	3371 C3	3580 B4
C18 A4	3372 C2	4301 B4
C19 A1	3373 C3	4302 A4
C20 B4	3374 C1	5401 A1
C21 B1	3375 C3	5530 C2
C22 C1	3376 C3	6301 B2
2301 B3	3382 A4	6331 A2
2331 A3	3383 A2	6345 B4
2344 A4	3384 A1	6361 C2
2361 B4	3385 A2	6382 B4
2391 A1	3391 A2	6411 A3
2392 A2	3392 B4	6421 A3
2411 A3	3395 A4	6422 B4
2412 A4	3396 A3	6518 B4
2421 A4	3397 B3	6519 C4
2431 A2	3411 A3	7302 B3
2432 A2	3412 A3	7303 B3
2433 C1	3413 A3	7304 B2
2434 C2	3414 A4	7305 B2
2520 C4	3415 A3	7331 A3
2521 C1	3421 A4	7333 A4
2522 C4	3422 A4	7334 A2
2523 C3	3423 A4	7335 A2
2526 C1	3424 A4	7345 B4
2528 C4	3431 A2	7361 C3
2531 C2	3432 C4	7363 C4
2532 C2	3433 A1	7364 C2
2533 C3	3434 C1	7365 C3
3301 B3	3435 B1	7383 A4
3302 B3	3436 C1	7391 A2
3303 B3	3442 C3	7402 B4
3304 B3	3443 B3	7411 A4
3305 C2	3446 A2	7421 A4
3309 B3	3447 A4	7530 C2
3310 B3	3448 A4	7533 C2
3311 B3	3449 A4	7534 C2
3312 B2	3512 B4	7536 B4
3313 B3	3518 B4	7537 C3
3314 A1	3520 C4	7538 B4
3315 B3	3521 C4	9000 B3
3316 B3	3522 C4	9001 A4
3331 B4	3524 C4	9002 A4
3332 A4	3525 C4	9003 C2
3333 A4	3526 C1	9004 B3
3334 A3	3527 C1	9005 B3
3338 A4	3528 C2	9006 B2
3340 A3	3529 C2	9010 B4
3341 A3	3530 C3	9011 C2
3342 A2	3531 C2	9402 A4
3343 A3	3532 C2	9520 C4
3344 A2	3533 C2	9530 C3
3345 B4	3534 C3	
3361 B4	3536 C4	
3362 B4	3571 A4	
3363 A4	3572 A4	
3364 A4	3575 B4	
3368 C4	3576 B4	
3370 C3	3578 C3	

dule
te
ur

Mains module
Netzteil
Module secteur

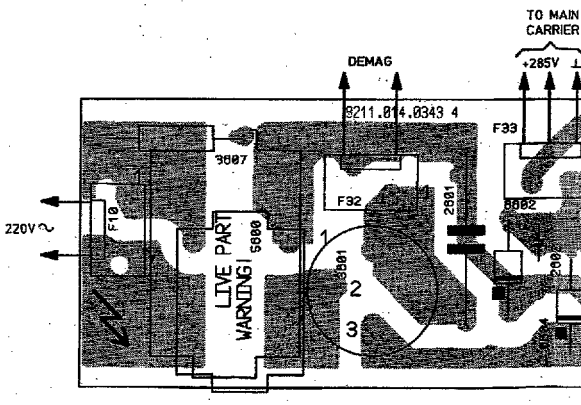

Picture tube module "mini neck" / Bildröhren Modul "mini neck" / Module support tube image "mini neck"

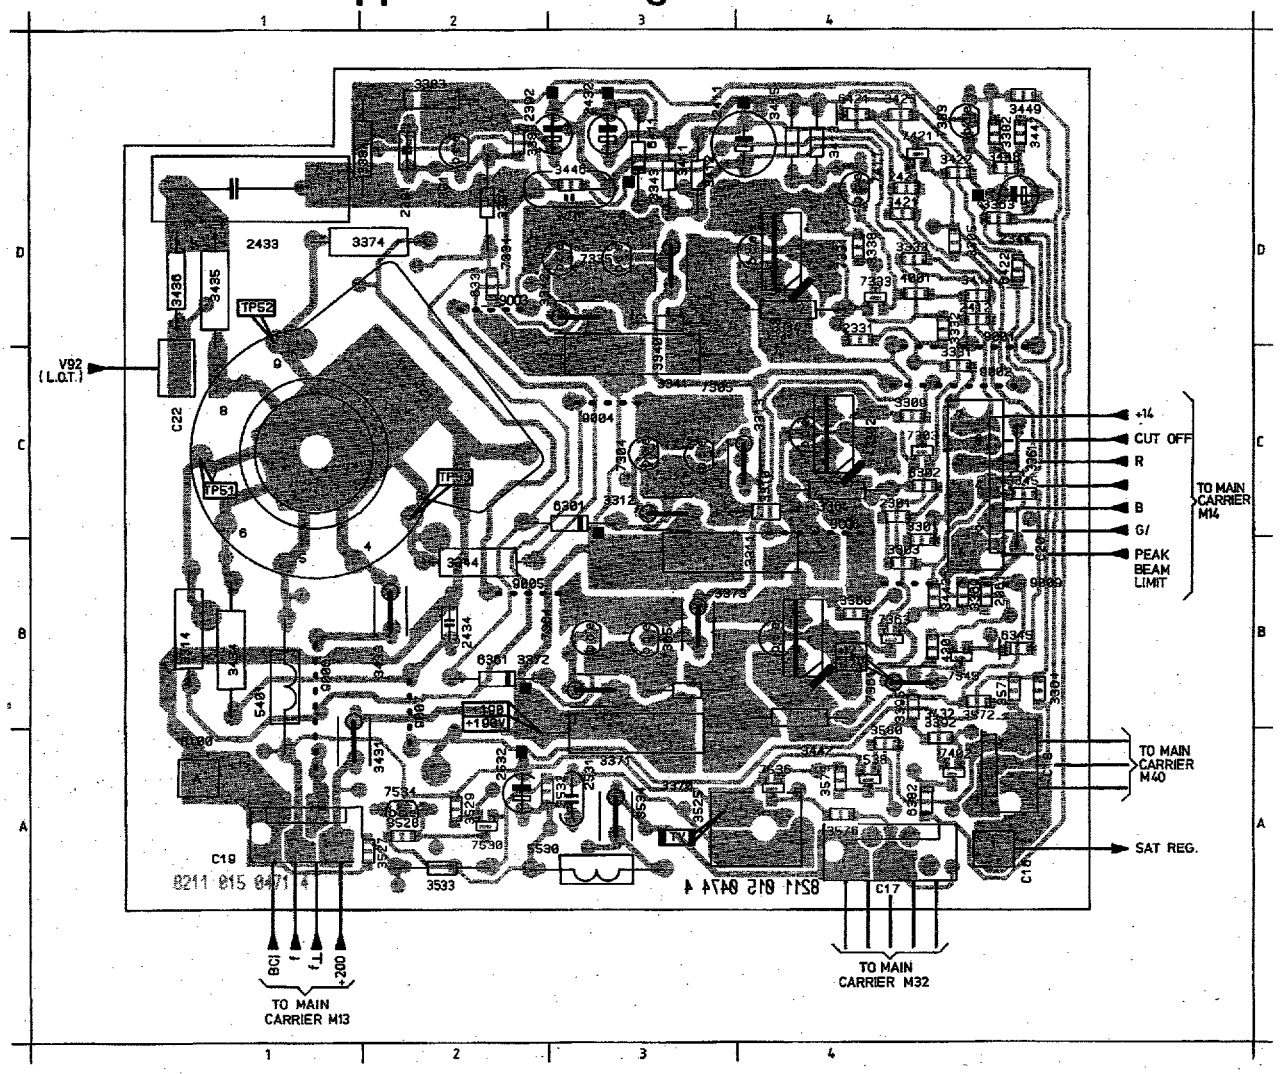

C16	A4	3431	A2
C17	A4	3432	B4
C18	A4	3433	B2
C19	A2	3434	B1
C20	C4	3435	D1
C21	C2	3436	D1
C22	D1	3442	B4
2301	C4	3443	B4
2331	D4	3446	D3
2344	D4	3447	D4
2361	B4	3448	D4
2391	D2	3449	D4
2392	D3	3525	A4
2411	D4	3527	A2
2412	D4	3528	A2
2421	D4	3529	A3
2431	D3	3532	A3
2433	D1	3533	A2
2434	B3	3534	A3
2531	A3	3571	B4
2532	A3	3572	B4
3301	C4	3575	A4
3302	C4	3576	A4
3303	B4	3580	A4
3304	C4	4001	D4
3305	D4	4301	B4
3309	C4	5401	B2
3310	C4	6301	C3
3311	B4	6331	D3
3312	C4	6345	B4
3313	C4	6361	B3
3314	B1	6382	A4
3331	C4	6411	D3
3332	D4	6422	D4
3333	D4	7302	C4
3334	D4	7303	C4
3338	D4	7304	C4
3340	D4	7305	C4
3341	D4	7331	D4
3342	D3	7333	D4
3343	D4	7334	D3
3344	B3	7335	D3
3345	C4	7345	B4
3361	C4	7361	B4
3362	B4	7363	B4
3363	D4	7364	B3
3364	B4	7365	B4
3368	B4	7391	D2
3370	B4	7402	A4
3371	B4	7411	D4
3372	B3	7421	D4
3373	B4	7530	A3
3374	D2	7534	A2
3384	D2	7536	A4
3385	D3	7538	A4
3391	D3	8100	A1
3392	A4	9001	D4
3395	B4	9002	C4
3411	D4	9003	D3
3412	D4	9004	C3
3413	D4	9005	B3
3414	D4	9006	B2
3415	D4	9007	B2
3421	D4	9008	C4
3422	D4	9009	B4

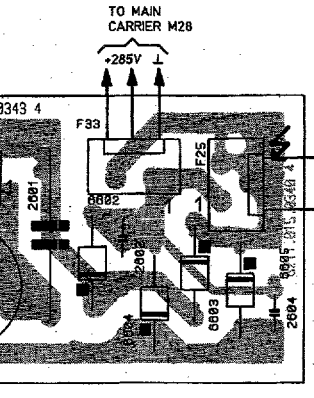

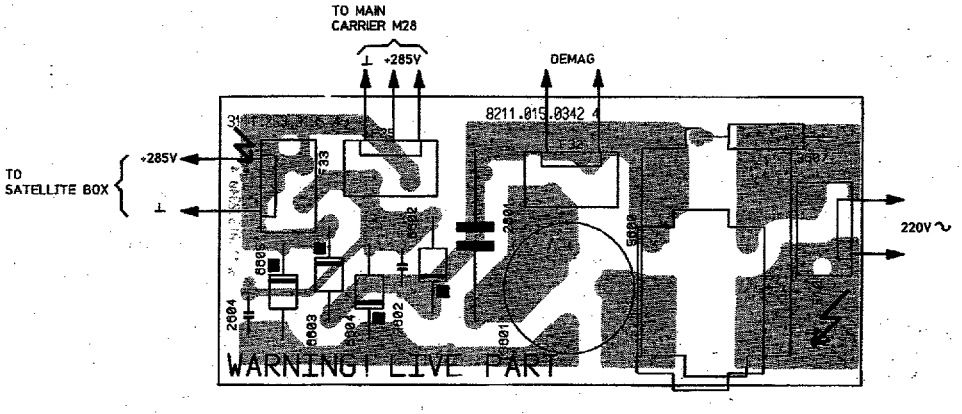

Separate Controle/Separate Bedienung/ Commande séparée

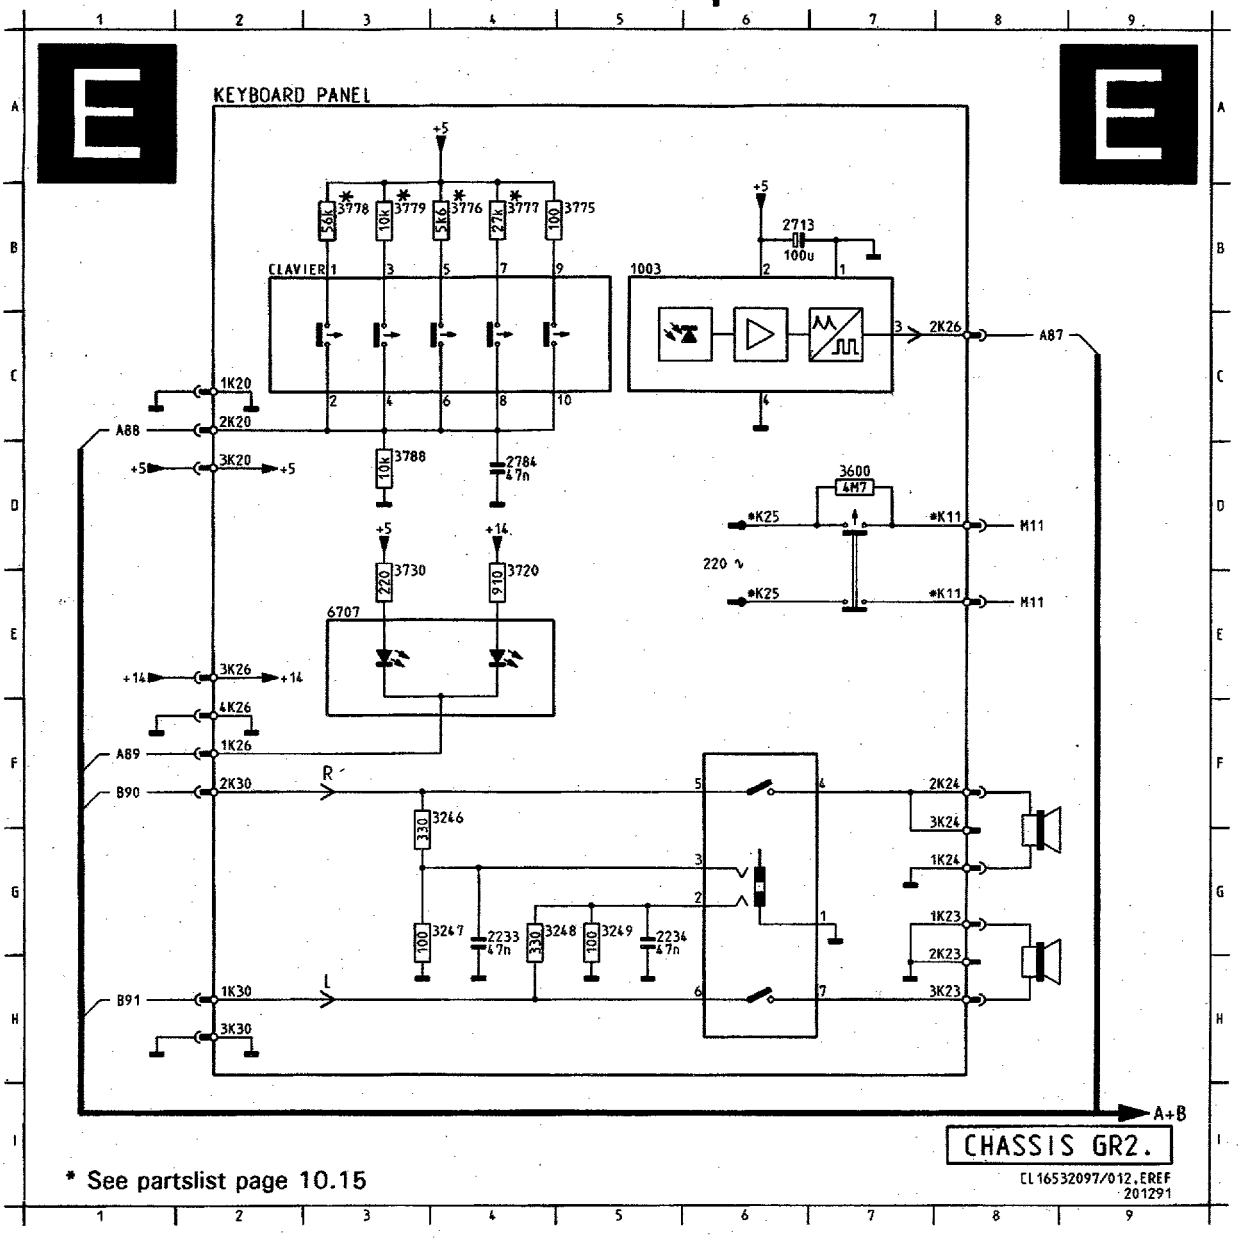

* See partslist page 10.15

1003 B 5
2233 G 4
2234 G 5
2713 B 6
2784 D 4
3246 F 3
3247 G 3
3248 G 4
3249 G 5
3600 D 7
3720 D 4
3730 D 3
3775 B 5
3776 B 4
3777 B 4
3778 B 3
3779 B 3
3788 D 3
6707 E 3

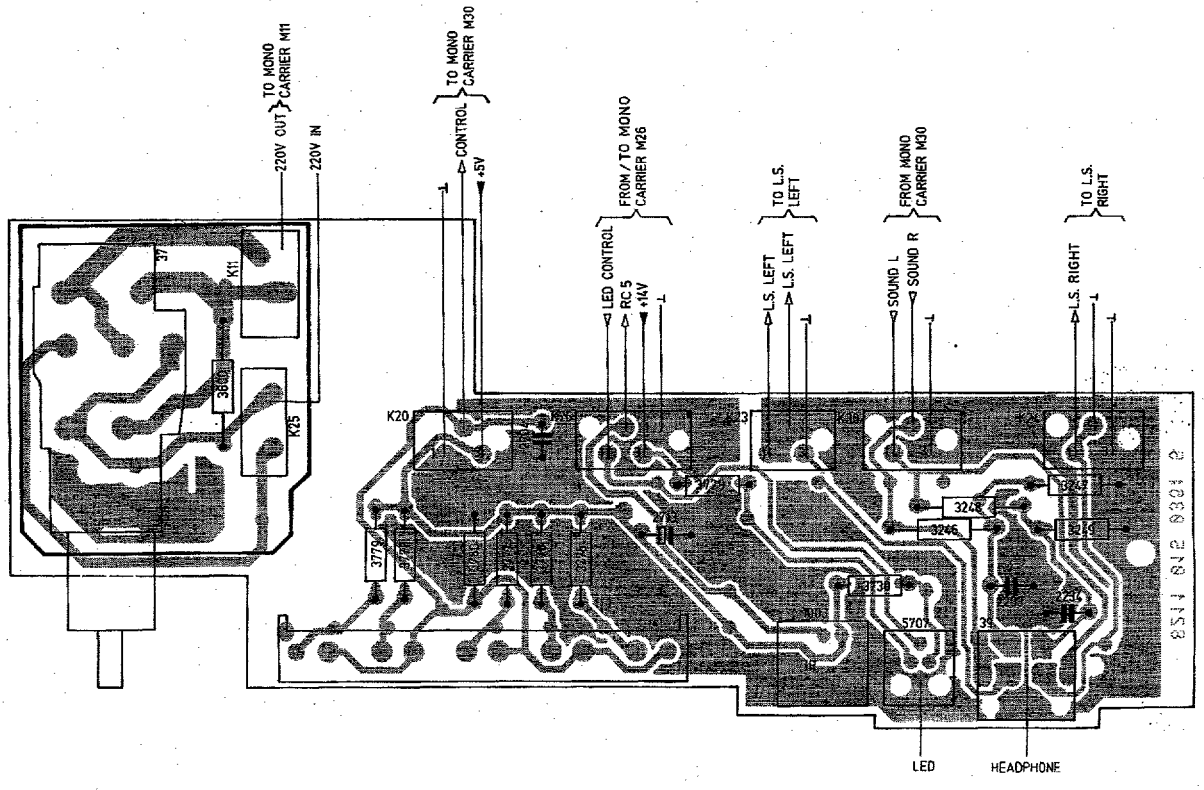

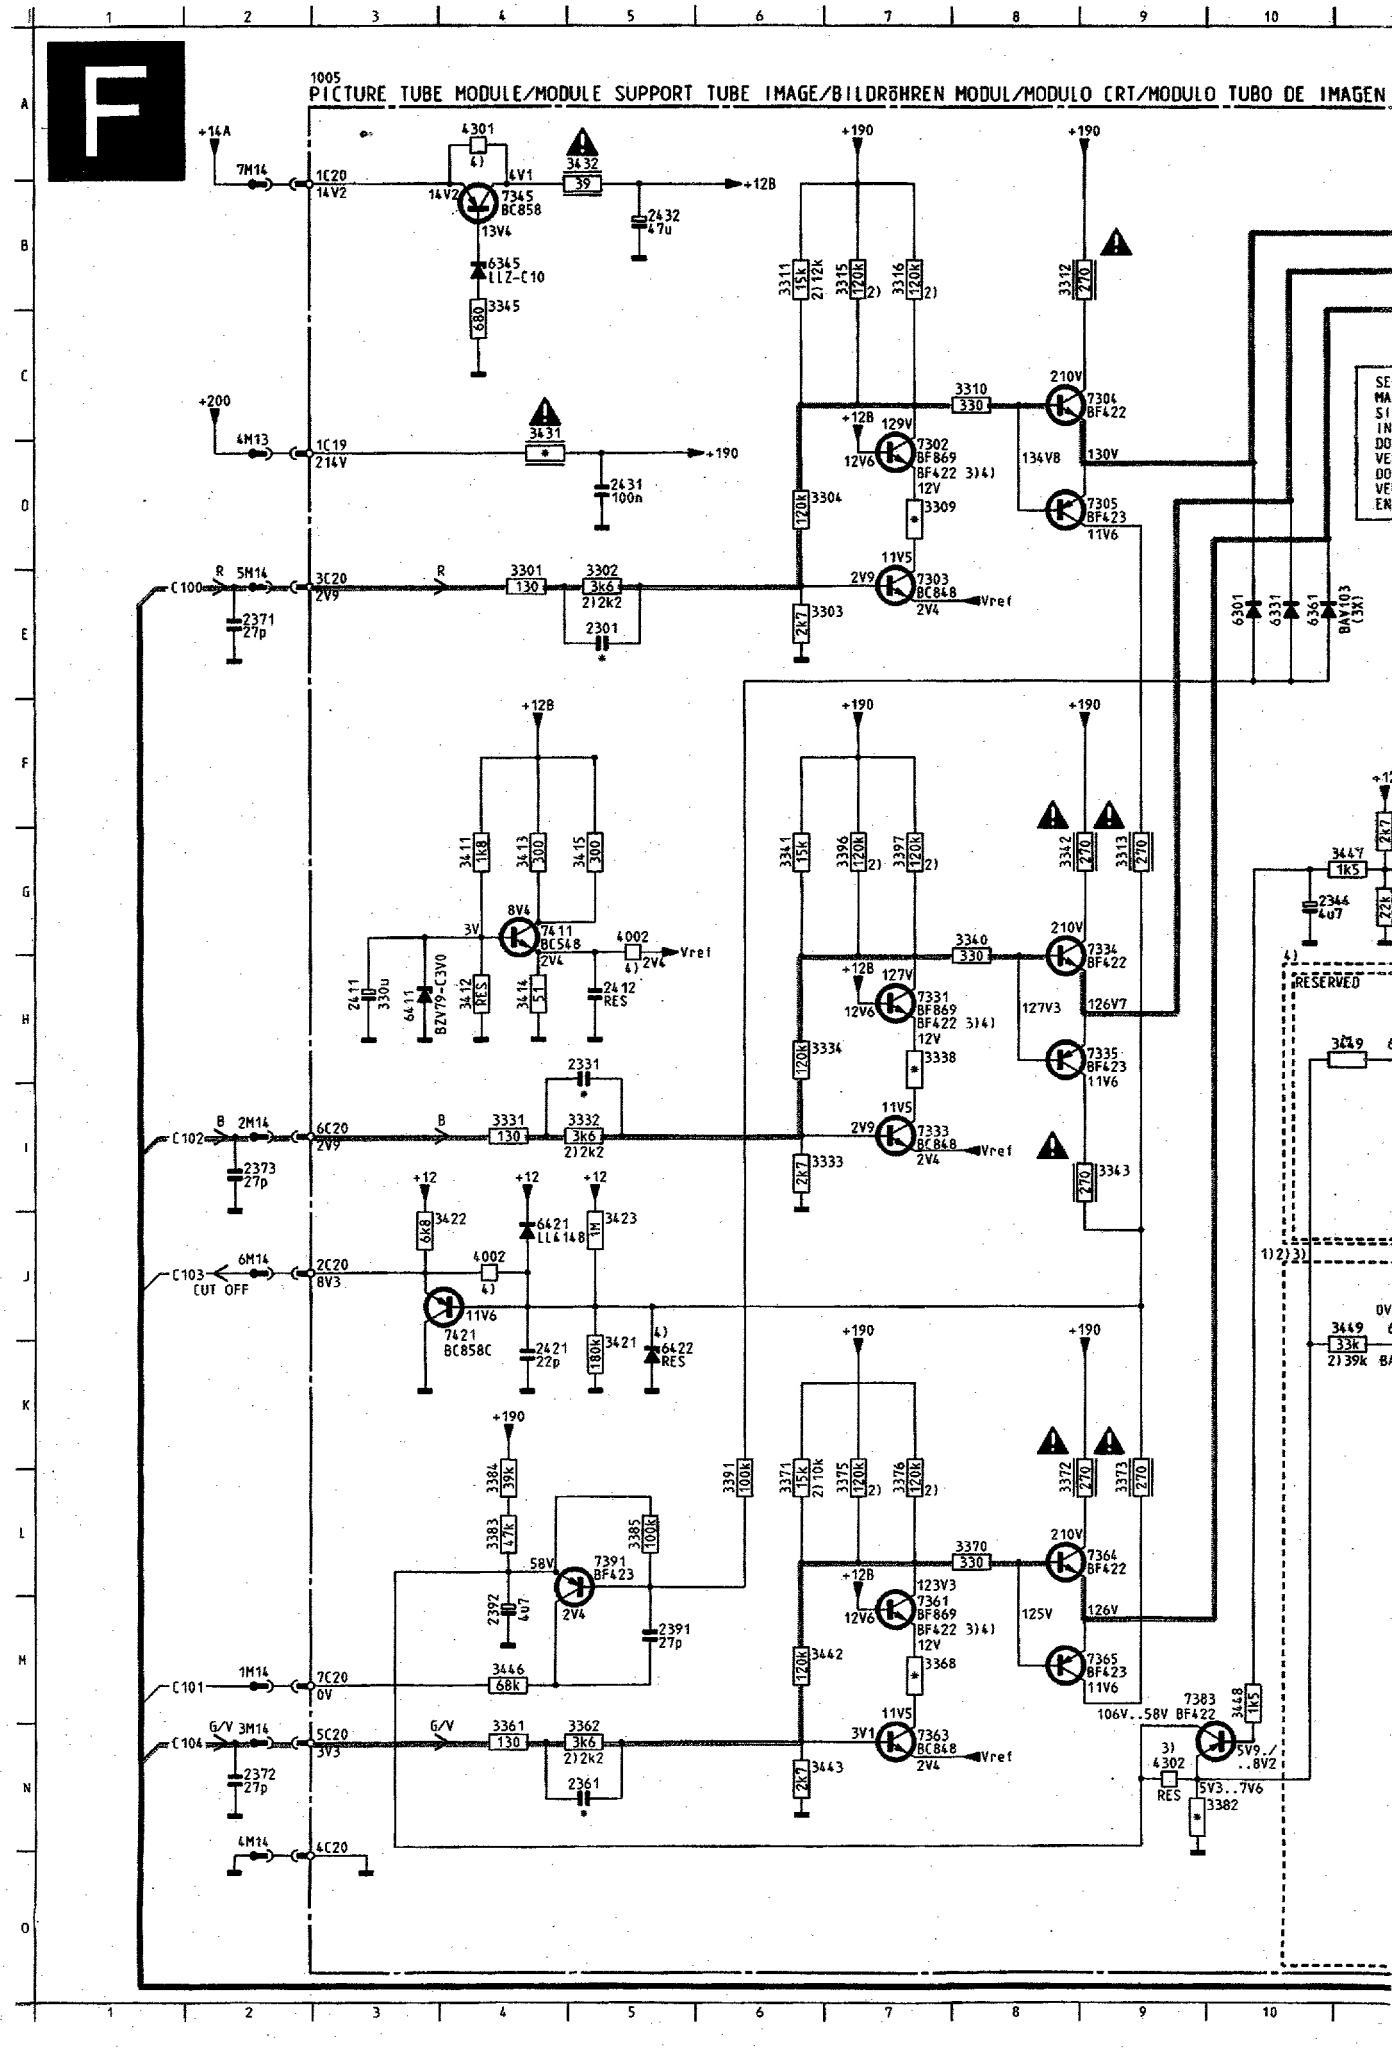
F
1005
PICTURE TUBE MODULE/MODULE SUPPORT TUBE IMAGE/BILDRÖHREN MODUL/MODULO CRT/MODULO TUBO DE IMAGEN
+14A
7M14
1C20
14V2
4301
4j
14V2
6V1
7345
BC858
13V4
3432
39
+12B
2432
47u
6345
LLZ-C10
3345
680
+200
4M13
1C19
21V
3431
+190
2631
100n
3311
15k
3315
120k
3316
120k
2)
3312
270
3310
330
210V
7304
BF422
+12B
129V
7302
BF869
BF422 3)4)
12V6
12V
3309
134V8
130V
7305
BF423
11V6
3304
120k
11V5
2V9
7303
BC848
2V4
Vref
3303
2k7
C100
R
5M14
3C20
2V9
2371
27p
3301
130
3302
3k6
2k2
2301
6301
6331
6361
BAV103
(3X)
+12B
3411
1k8
3413
300
3415
300
8V4
7411
BC548
2V4
3V
4002
4j
2V4
Vref
2411
330u
6411
BZV79-C3V0
3412
RES
3414
5k1
2412
RES
3341
15k
3396
120k
2)
3397
120k
2)
3342
270
3313
270
3447
1k5
2344
4u7
3340
330
210V
7334
BF422
+12B
127V
7331
BF869
BF422 3)4)
12V6
12V
3338
127V3
126V7
7335
BF423
11V6
3334
120k
11V5
2V9
7333
BC848
2V4
Vref
2k7
3333
3343
270
RESERVED
3449
2331
C102
B
2M14
6C20
2V9
B
3331
130
3332
3k6
2k2
2373
27p
+12
3422
6k8
6421
LL4148
3423
1k
C103
CUT OFF
6M14
2C20
8V3
4002
4j
11V6
7421
BC858C
2421
22p
3421
180k
4j
6422
RES
3449
33k
2)39k
+190
3384
39k
3383
4.7k
3385
100k
58V
7391
BF423
2V4
2392
4u7
2391
27p
3391
100k
3371
15k
2)10k
3375
120k
2)
3376
120k
2)
3372
270
3373
270
3370
330
210V
7364
BF422
+12B
123V3
7361
BF869
BF422 3)4)
12V6
12V
3368
125V
126V
7365
BF423
11V6
106V..58V
3442
120k
11V5
3V1
7363
BC848
2V4
Vref
3443
2k7
C101
1M14
7C20
0V
3446
68k
C104
G/V
3M14
5C20
3V3
G/V
3361
130
3362
3k6
2k2
2361
2372
27p
4M14
4C20
7383
BF422
3448
1k5
3)
4302
RES
5V9../..8V2
5V3..7V6
3382

Bildröhren Module/Module support tube image

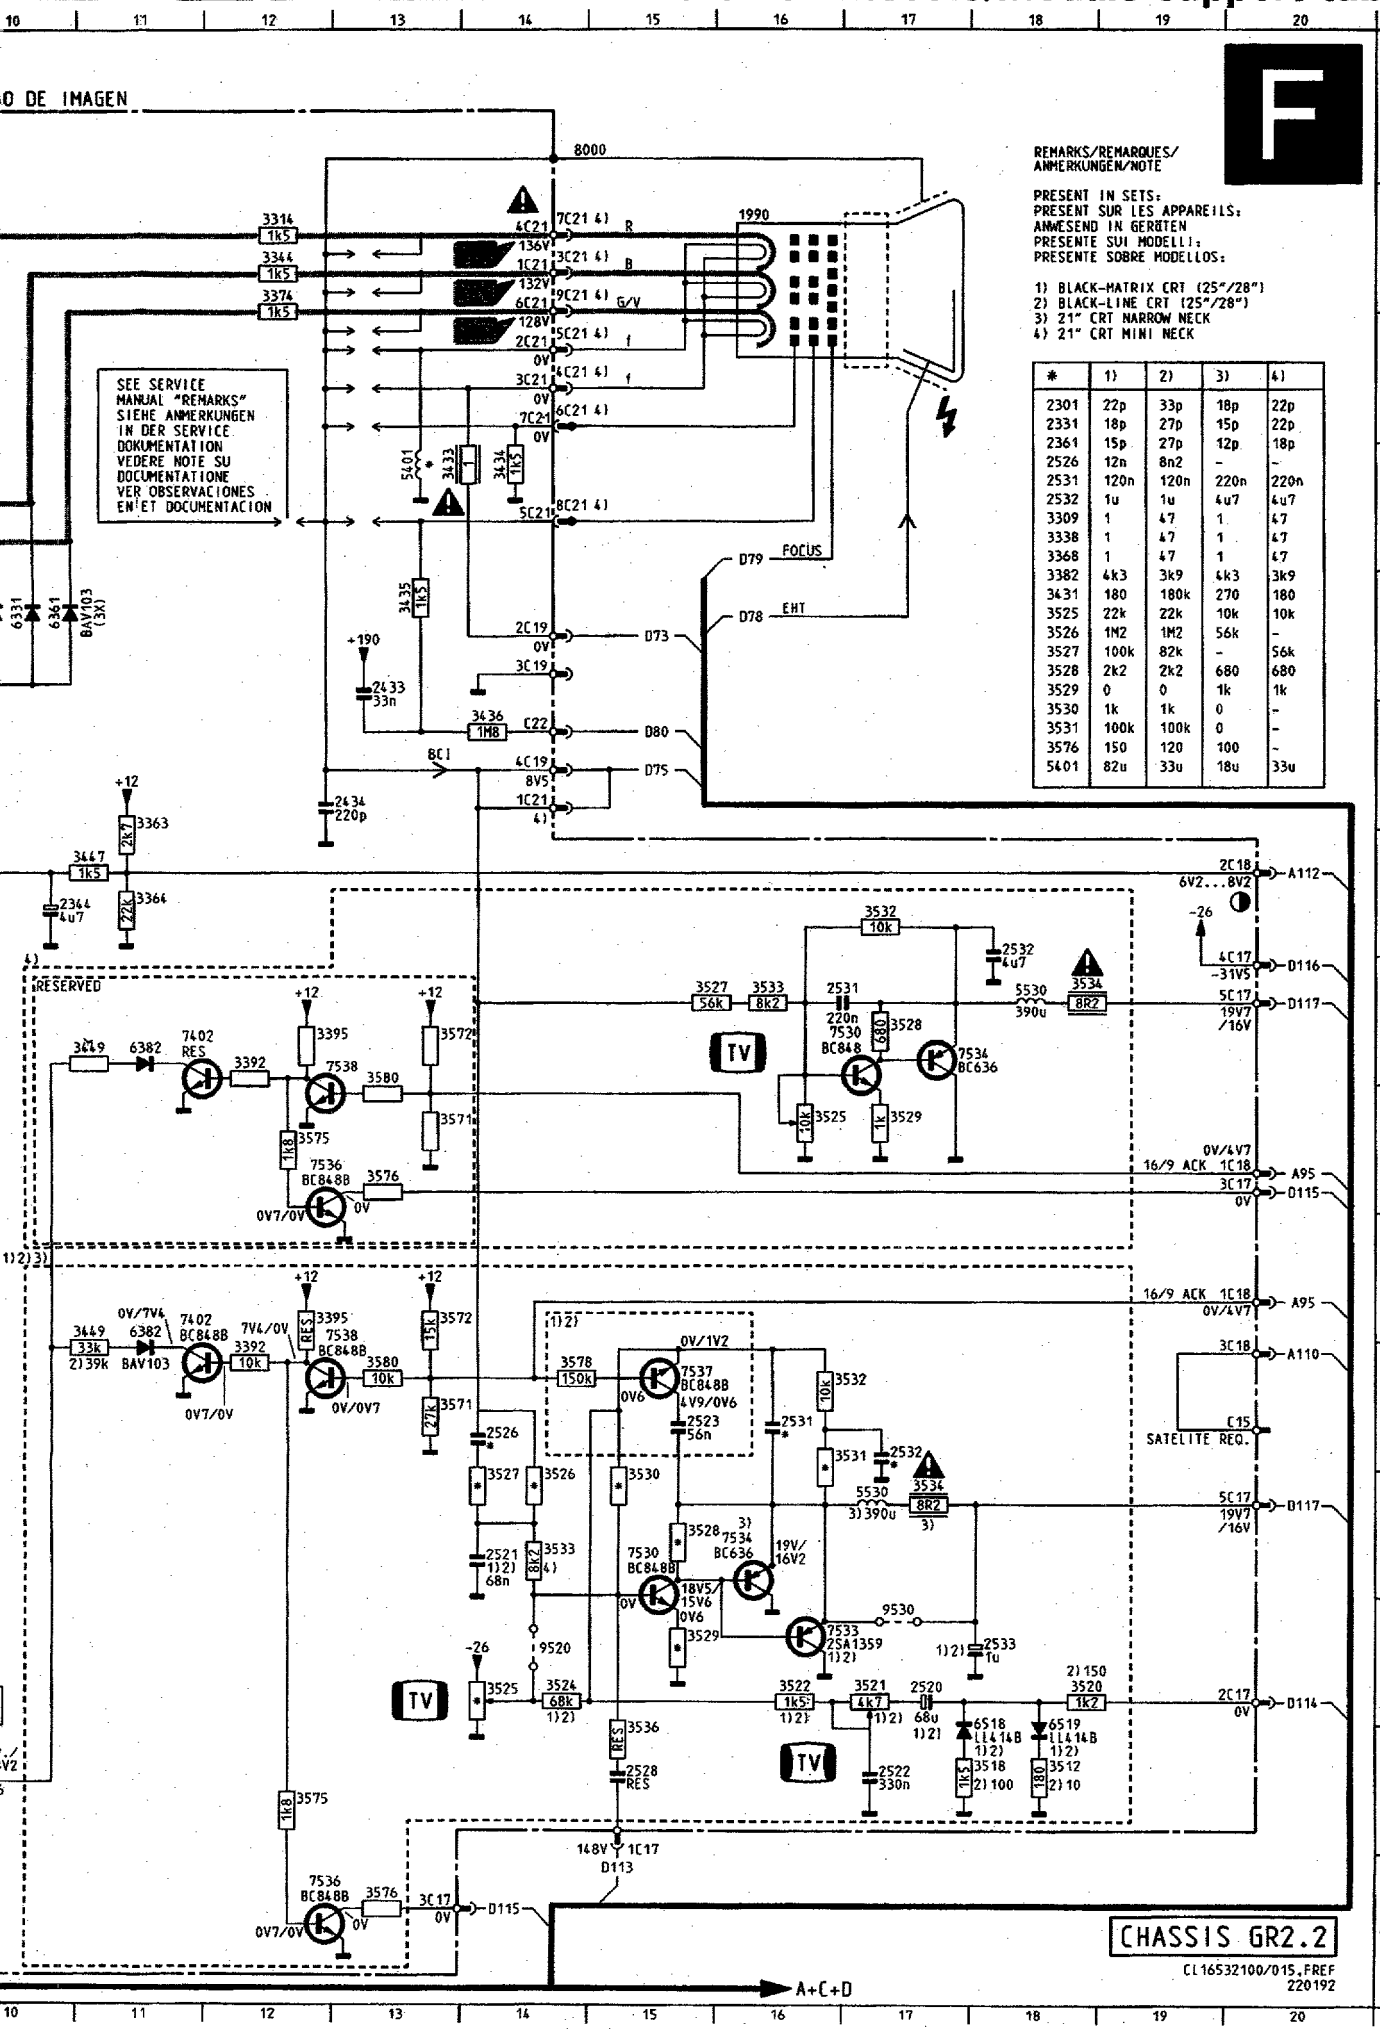

*	1)	2)	3)	4)
2301	22p	33p	18p	22p
2331	18p	27p	15p	22p
2361	15p	27p	12p	18p
2526	12n	8n2	-	-
2531	120n	120n	220n	220n
2532	1u	1u	4u7	4u7
3309	1	47	1	47
3338	1	47	1	47
3368	1	47	1	47
3382	4k3	3k9	4k3	3k9
3431	180	180k	270	180
3525	22k	22k	10k	10k
3526	1M2	1M2	56k	-
3527	100k	82k	-	56k
3528	2k2	2k2	680	680
3529	0	0	1k	1k
3530	1k	1k	0	-
3531	100k	100k	0	-
3576	150	120	100	-
5401	82u	33u	18u	33u

1005 A 2 3534 H
1990 B16 3534 L
2301 E 5 3536 M
2331 H 5 3571 I
2344 G10 3571 K
2361 N 5 3572 H
2371 E 2 3572 J
2372 N 2 3575 M
2373 I 2 3575 I
2391 M 5 3576 I
2392 M 4 3576 D
2411 H 3 3578 K
2412 H 5 3580 H
2421 K 4 3580 K
2431 D 5 4002 J
2432 B 5 4002 G
2433 E13 4301 A
2434 F13 4302 N
2520 M17 5401 D
2521 L14 5530 H
2522 N17 5530 L
2523 K15 6301 E
2526 K14 6331 E
2528 N15 6345 B
2531 H16 6361 E
2531 K16 6382 H
2532 G18 6382 J
2532 K17 6411 H
3301 E 4 6421 J
3302 E 5 6422 K
3303 E 6 6518 N
3304 D 6 6519 N
3309 D 7 7302 D
3310 C 8 7303 E
3311 B 6 7304 C
3312 B 8 7305 D
3313 G 9 7331 H
3314 B12 7333 I
3315 B 7 7334 H
3316 B 7 7335 H
3331 I 4 7345 B
3332 I 5 7361 M
3333 I 6 7363 N
3334 H 6 7366 L
3338 H 7 7365 M
3340 G 8 7383 M
3341 G 6 7391 L
3342 G 8 7402 H
3343 I 9 7402 J
3344 B12 7411 G
3345 B 4 7421 J
3361 N 4 7530 H
3362 N 5 7530 L
3363 F11 7533 M
3364 G11 7534 H
3368 M 7 7534 L
3370 L 8 7536 O
3371 L 6 7536 I
3372 L 8 7537 K
3373 L 9 7538 H
3374 B12 7538 K
3375 L 7 9530 N
3376 L 7
3382 N 9
3383 L 4
3384 L 4
3385 L 5
3391 L 6
3392 K12
3392 H12
3395 H12
3395 J12
3396 G 7
3397 G 7
3411 G 4
3412 H 4
3413 G 4
3414 H 4
3415 G 5
3421 J 5
3422 J 3
3423 J 5
3431 D 4
3432 A 5
3433 D13
3434 D14
3435 E13
3436 F14
3442 M 6
3443 N 6
3446 M 4
3447 G11
3448 M10
3449 H11
3449 J11
3512 N18
3518 N18
3520 M18
3521 M17
3522 M16
3524 M14
3525 I16
3525 M14
3526 K14
3527 H15
3527 K14
3528 H17
3528 L15
3529 I17
3529 M15
3530 K15
3531 K16
3532 G17
3532 K16
3533 H16
3533 L14

image

005	A 2	3534	H18
990	B16	3534	L17
801	E 5	3536	M15
831	H 5	3571	I13
844	G10	3571	K13
861	N 5	3572	H13
871	E 2	3572	J13
872	N 2	3575	N12
873	I 2	3575	I12
891	M 5	3576	I13
892	M 4	3576	O13
11	H 3	3578	K14
12	H 5	3580	H13
21	K 4	3580	K13
31	D 5	4002	J 4
32	B 5	4002	G 5
33	E13	4301	A 4
34	F13	4302	N 9
20	M17	5401	D13
21	L14	5530	H18
22	N17	5530	L17
23	K15	6301	E10
26	K14	6331	E10
28	N15	6345	B 4
31	H16	6361	E10
31	K16	6382	H11
32	G18	6382	J11
32	K17	6411	H 3
801	E 4	6421	J 4
802	E 5	6422	K 5
803	E 6	6518	N18
804	D 6	6519	N18
809	D 7	7302	D 7
810	C 8	7303	E 7
811	B 6	7304	C 9
812	B 8	7305	D 9
813	G 9	7331	H 7
814	B12	7333	I 7
815	B 7	7334	H 9
816	B 7	7335	H 9
831	I 4	7345	B 4
832	I 5	7361	M 7
833	I 6	7363	N 7
834	H 6	7364	L 9
838	H 7	7365	M 9
840	G 8	7383	M10
841	G 6	7391	L 5
842	G 8	7402	H11
843	I 9	7402	J11
844	B12	7411	G 4
845	B 4	7421	J 4
861	N 4	7530	H17
862	N 5	7530	L15
863	F11	7533	M16
864	G11	7534	H17
868	M 7	7534	L16
870	L 8	7536	O12
871	L 6	7536	I12
872	L 8	7537	K15
873	L 9	7538	H12
874	B12	7538	K12
875	L 7	9530	M17
876	L 7		
882	N 9		
883	L 4		
884	L 4		
885	L 5		
891	L 6		
892	K12		
892	H12		
895	H12		
895	J12		
896	G 7		
897	G 7		
11	G 4		
12	H 4		
13	G 4		
14	H 4		
15	G 5		
21	J 5		
22	J 3		
23	J 5		
31	D 4		
32	A 5		
33	D13		
34	D14		
35	E13		
36	F14		
42	M 6		
43	N 6		
46	M 4		
47	G11		
48	M10		
49	H11		
49	J11		
12	N18		
18	N18		
20	M18		
21	M17		
22	M16		
24	M14		
25	L16		
25	M14		
26	K14		
27	H15		
27	K14		
28	H17		
28	L15		
29	I17		
29	M15		
30	K15		
31	K16		
32	G17		
32	K16		
33	H16		
33	L14		



TP 51
130 V_{pp}
115 V_{pp} for 21"



TP 52
120 V_{pp}
115 V_{pp} for 21"



TP 53
120 V_{pp}
110 V_{pp} for 21"

Mono IF/sound module / Mono ZF/Tonmodul

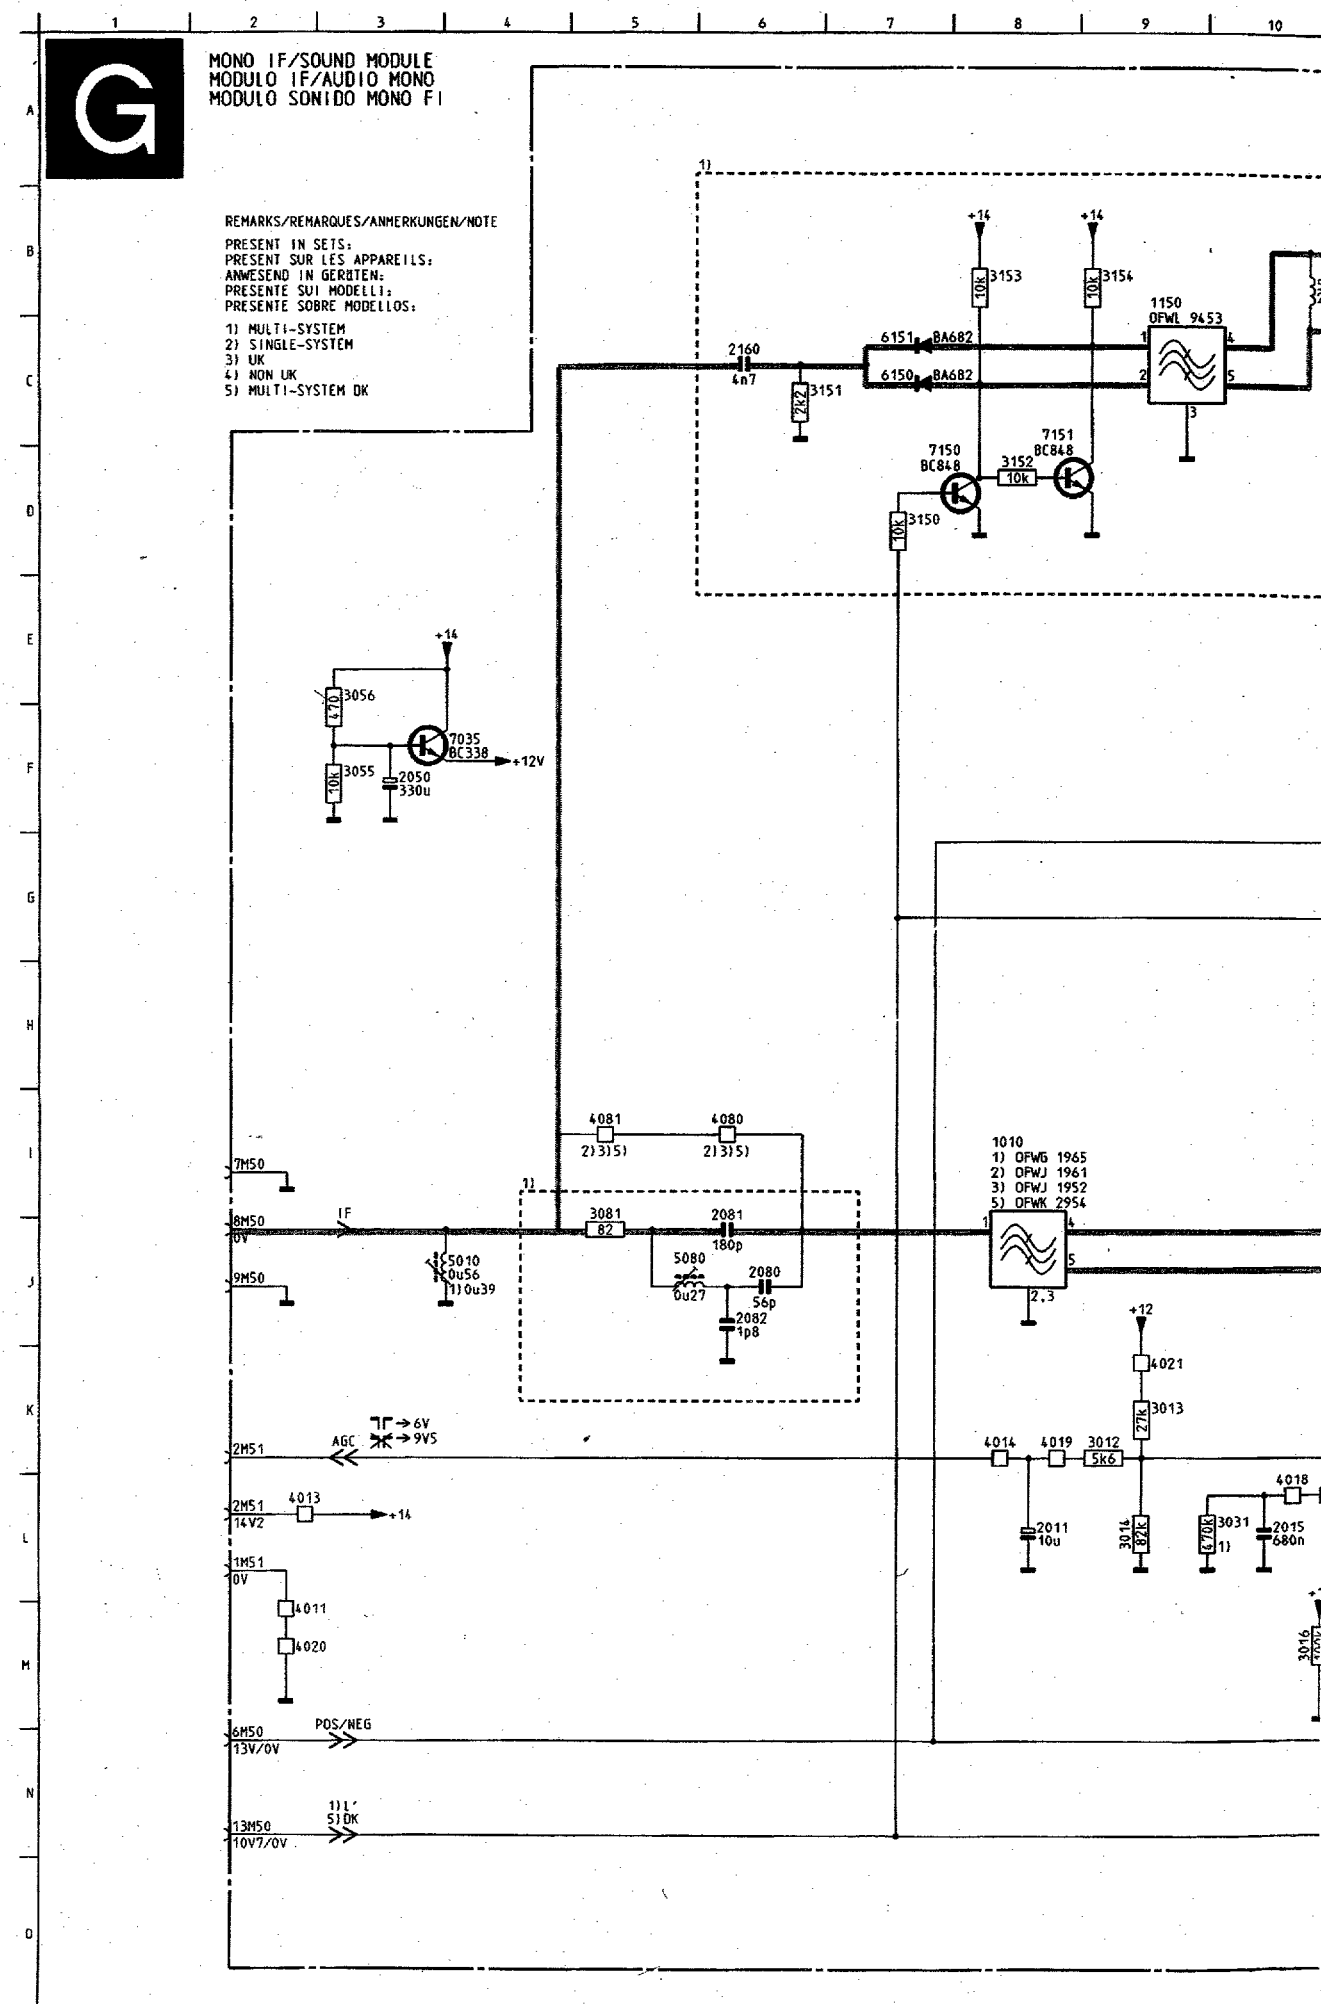

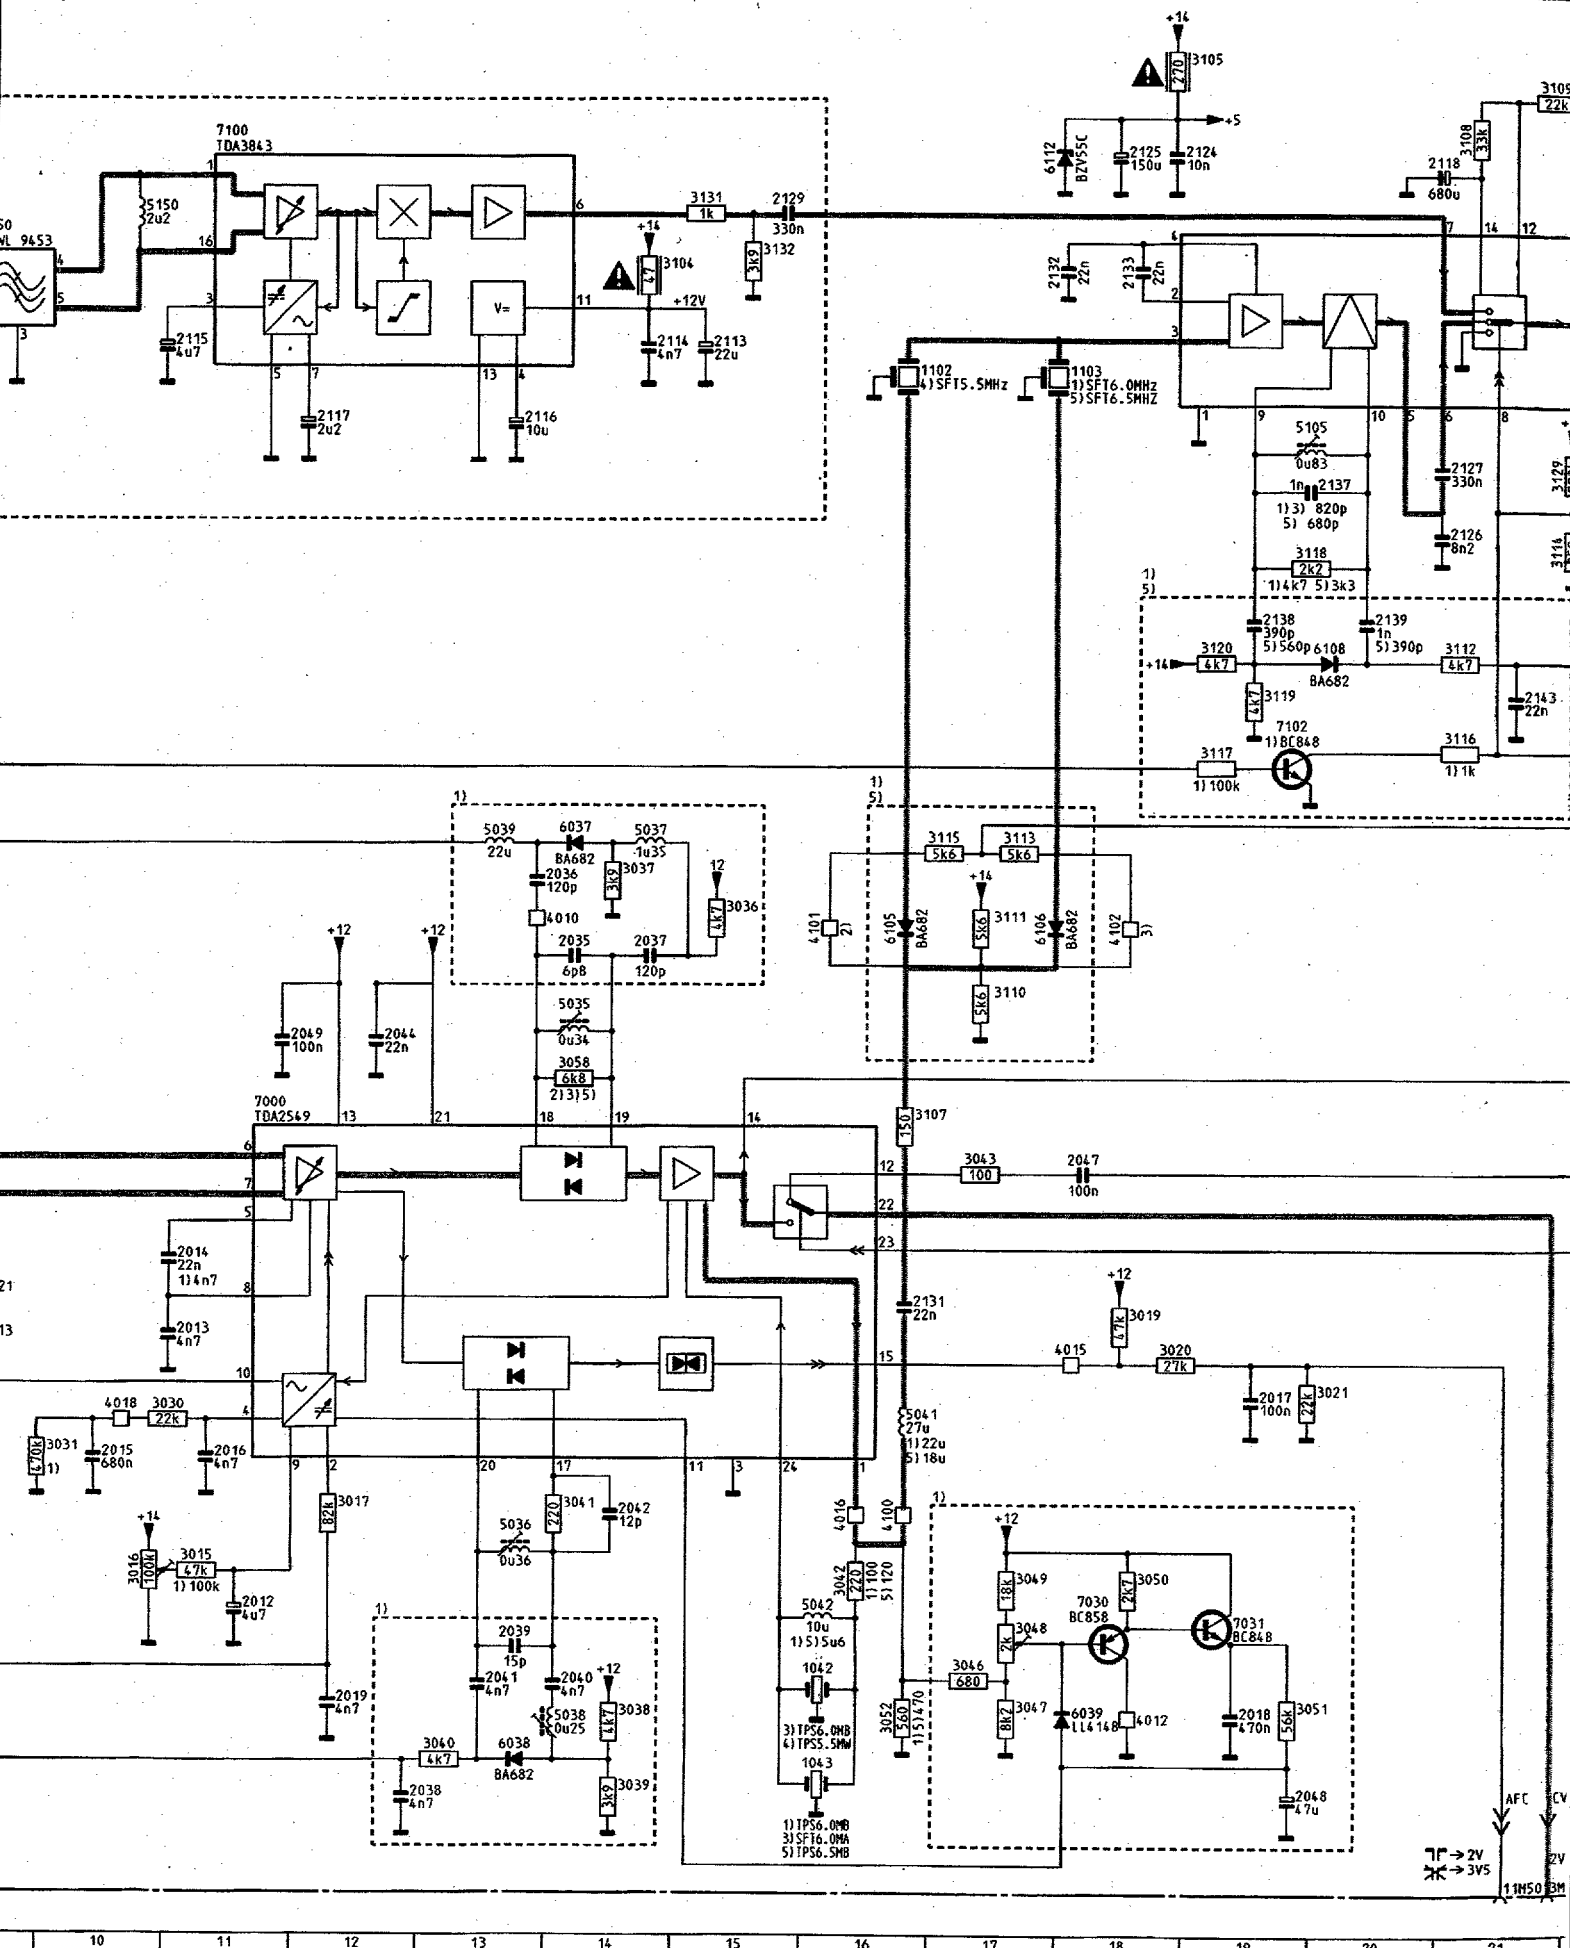
7100
TDA3843
7000
TDA2549
7102
1)BC848
7030
BC858
7031
BC848
BA682
BZV55C
+14
+12
+5
+12V
V=
1102
4)SFT5.5MHz
1103
1)SFT6.0MHz
5)SFT6.5MHz
1)3) 820p
5) 680p
1)4k7 5)3k3
1)100k
1)1k
1)22u
5)18u
1)100
5)120
1)5)5u6
3)TPS6.0MB
4)TPS5.5MW
1)TPS6.0MB
3)SFT6.0MA
5)TPS6.5MB
1)
5)
AFC
CV
2V
→2V
→3V5
11M50

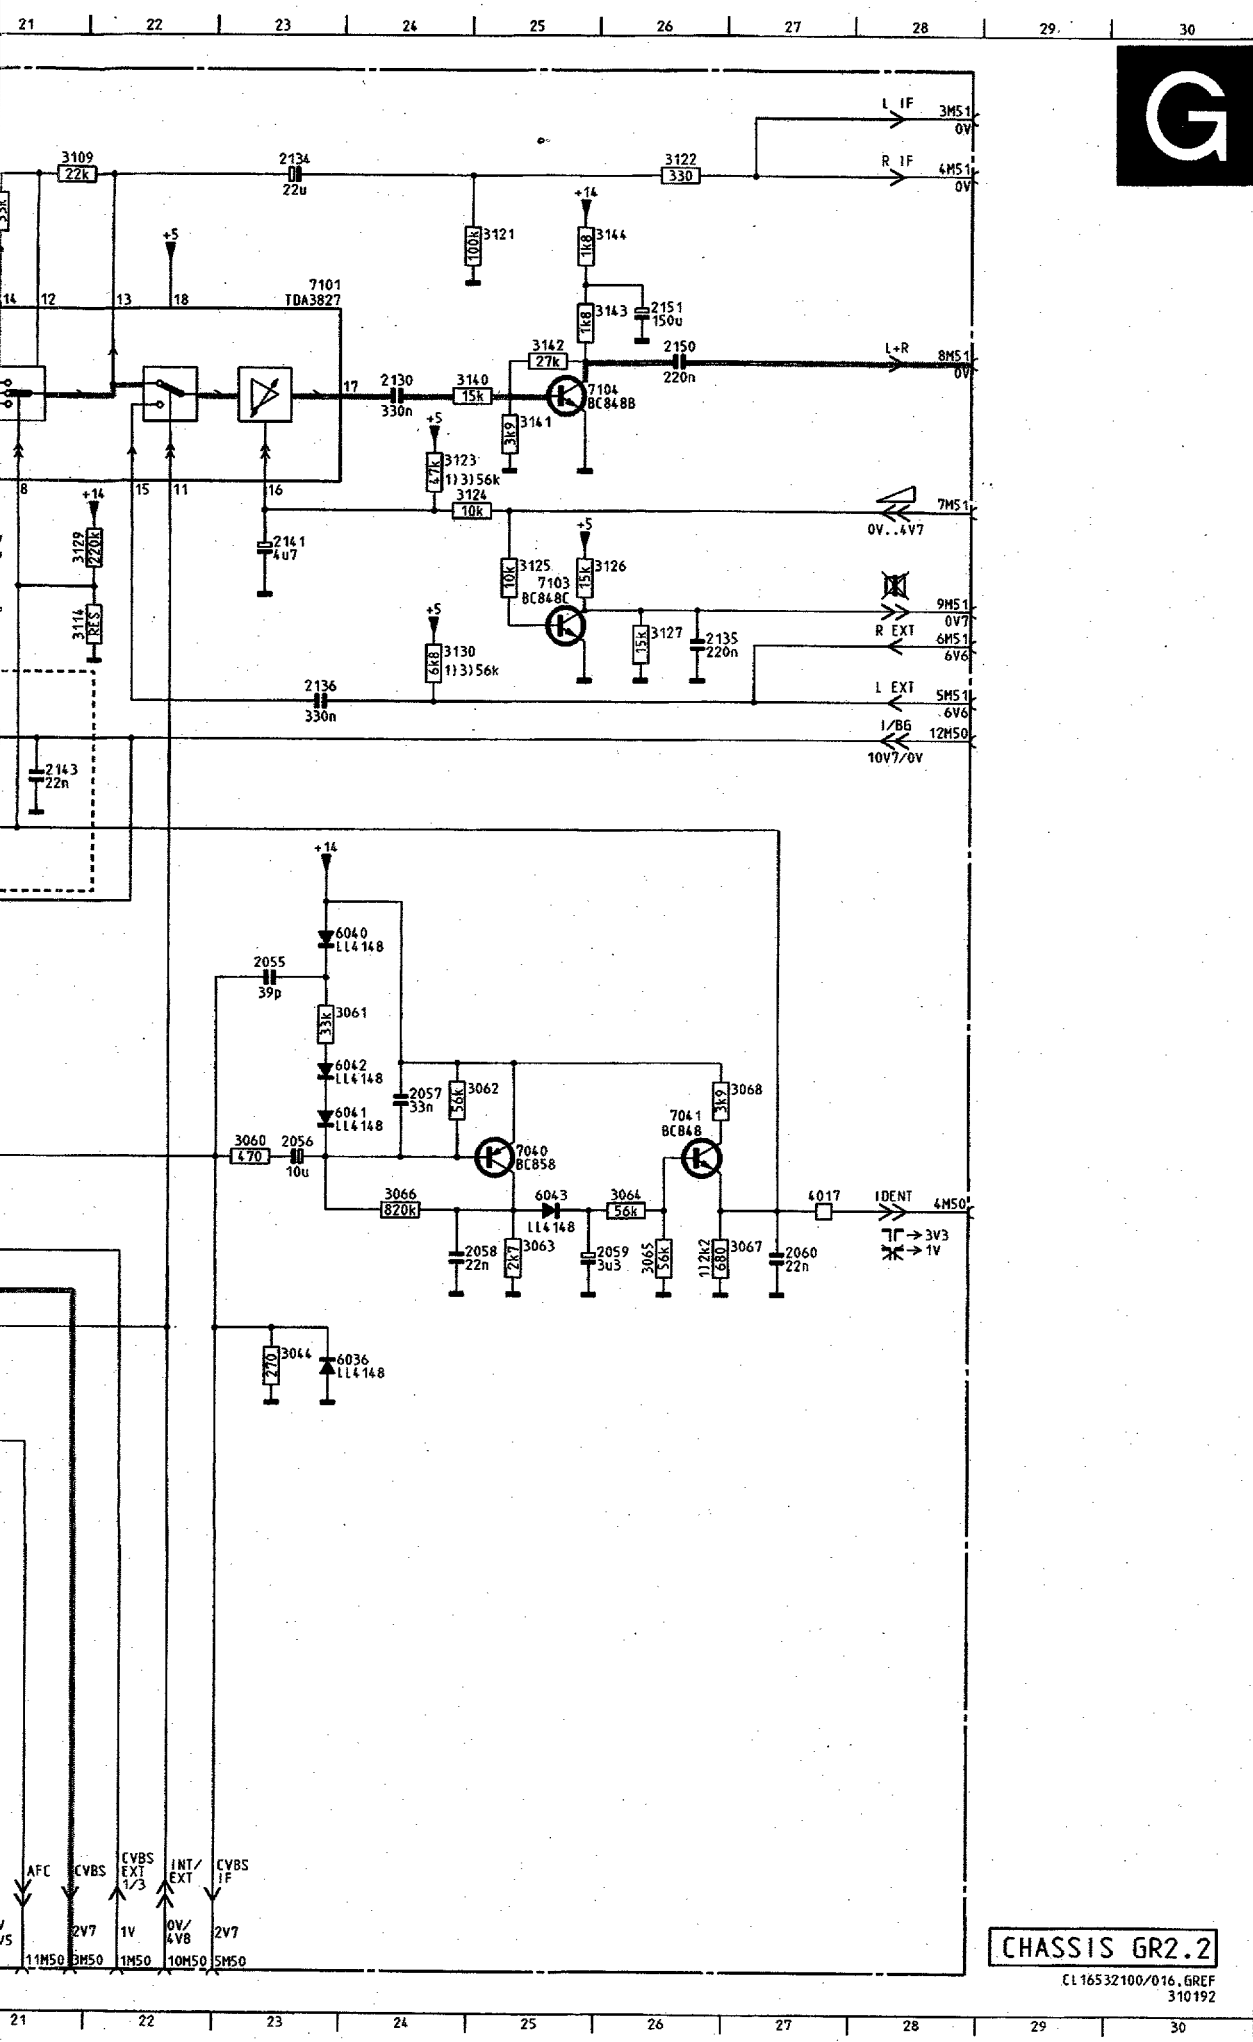

	1010	I 8	3118	E19
	1042	N16	3119	F19
	1043	N16	3120	F19
	1102	D16	3121	B25
A	1103	D18	3122	A26
	1150	B 9	3123	D24
	2011	L 8	3124	D24
	2012	M11	3125	D25
	2013	K11	3126	D25
	2014	J11	3127	E26
	2015	L10	3129	D21
	2016	L11	3130	E24
B	2017	L19	3131	B15
	2018	N19	3132	C15
	2019	N12	3140	C24
	2035	H14	3141	C25
	2036	G13	3142	C25
	2037	H14	3143	B25
	2038	O12	3144	B25
	2039	M13	3150	D 7
C	2040	N14	3151	C 6
	2041	N13	3152	D 8
	2042	L14	3153	B 8
	2044	I12	3154	B 9
	2047	J18	4010	H13
	2048	D19	4011	M 2
	2049	I11	4012	N18
D	2050	F 3	4014	K 8
	2055	H23	4015	K18
	2056	I23	4016	L16
	2057	I24	4017	I27
	2058	J24	4018	L10
	2059	J26	4019	K 8
	2060	J27	4020	M 2
	2080	J 6	4021	K 9
E	2081	J 6	4080	I 6
	2082	J 6	4081	I 5
	2113	C15	4100	L16
	2114	C14	4101	H16
	2115	C11	4102	H18
	2116	D13	5010	J 4
	2117	D12	5035	H14
F	2118	B21	5036	M13
	2124	B18	5037	G14
	2125	B18	5038	N14
	2126	E21	5039	G13
	2127	D21	5041	L16
	2129	B15	5042	M16
	2130	C24	5080	J 5
	2131	K16	5105	D19
G	2132	C17	5150	B10
	2133	C18	6036	K23
	2134	A23	6037	G14
	2135	E26	6038	N13
	2136	E23	6039	N18
	2137	D20	6040	G23
	2138	E19	6041	I23
H	2139	E20	6042	H23
	2141	D23	6043	I25
	2143	F21	6105	H16
	2150	C26	6106	H17
	2151	B26	6108	F20
	2160	C 6	6112	B17
	3012	K 9	6150	C 7
	3013	K 9	6151	C 7
I	3014	L 9	7000	L11
	3015	M11	7030	M18
	3016	M10	7031	M19
	3017	L12	7035	F 4
	3019	K18	7040	I25
	3020	K18	7041	I26
	3021	K20	7100	B11
J	3030	L11	7101	B23
	3031	L10	7102	F19
	3036	H15	7103	E25
	3037	G14	7104	C25
	3038	N14	7150	D 8
	3039	N14	7151	C 8
	3040	N13		
	3041	L14		
K	3042	M16		
	3043	J17		
	3044	J23		
	3046	N17		
	3047	N17		
	3048	M17		
	3049	M17		
	3050	M18		
L	3051	N19		
	3052	N16		
	3055	F 3		
	3056	E 3		
	3058	I14		
	3060	I23		
	3061	H23		
M	3062	H24		
	3063	J25		
	3064	I26		
	3065	J26		
	3066	I24		
	3067	J27		
	3068	H27		
	3081	J 5		
N	3104	C14		
	3105	A19		
	3107	I16		
	3108	B21		
	3109	A21		
	3110	H17		
	3111	H17		
	3112	F21		
O	3113	G17		
	3114	E21		
	3115	G17		
	3116	F21		
	3117	F19		

CHASSIS GR2.2

CL16532100/016.GREF

310192

Mono IF/sound module / Mono ZF/Tonmodul /

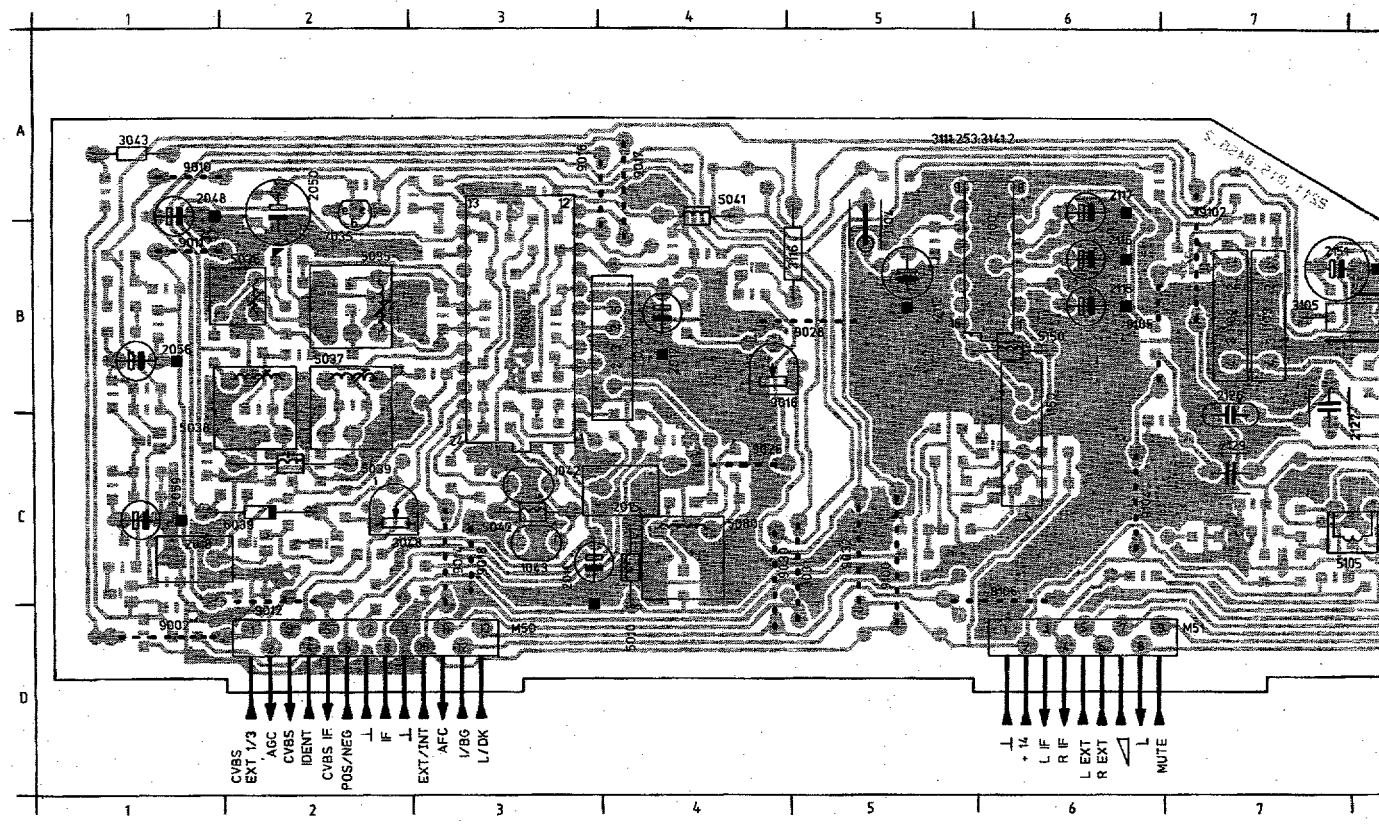

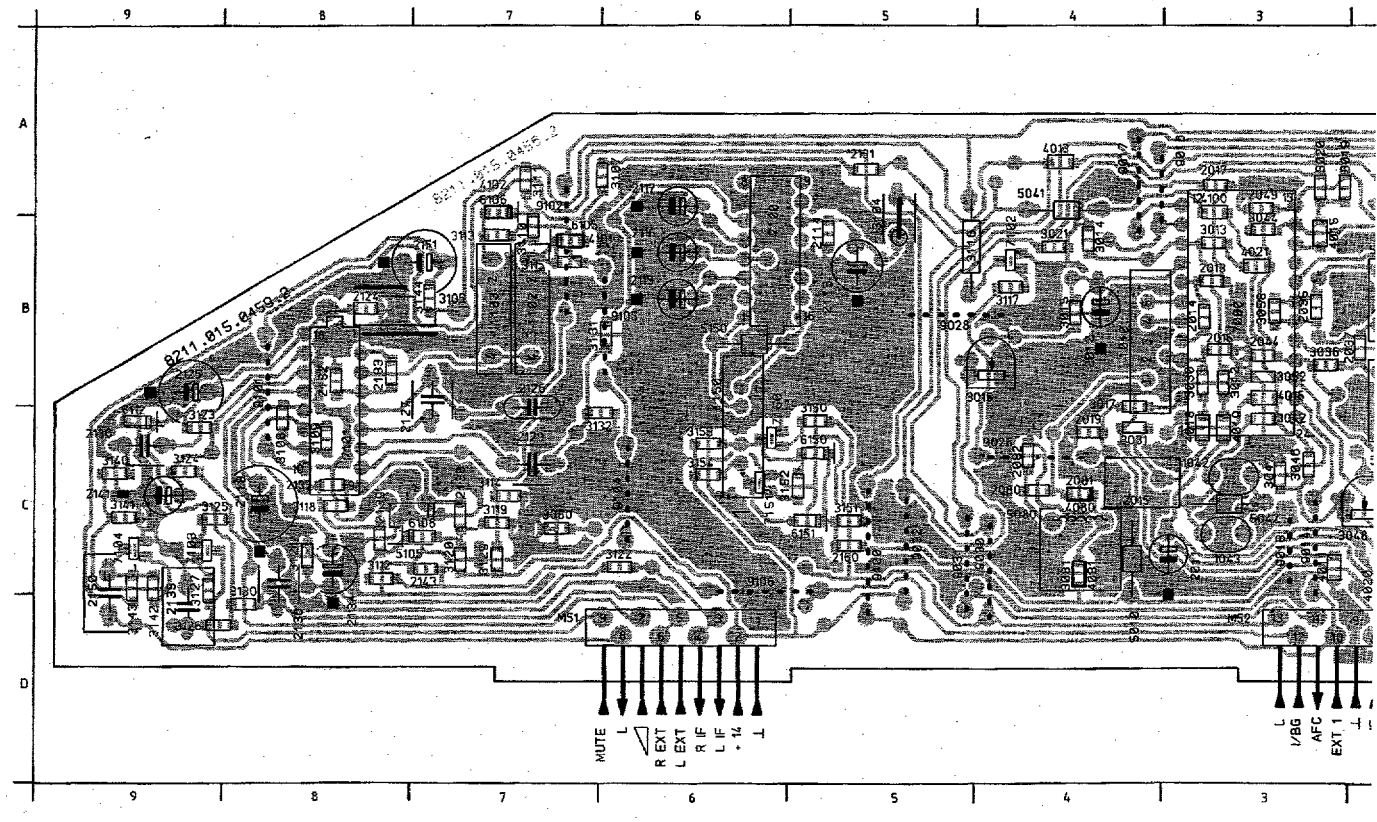

Module FI/son mono

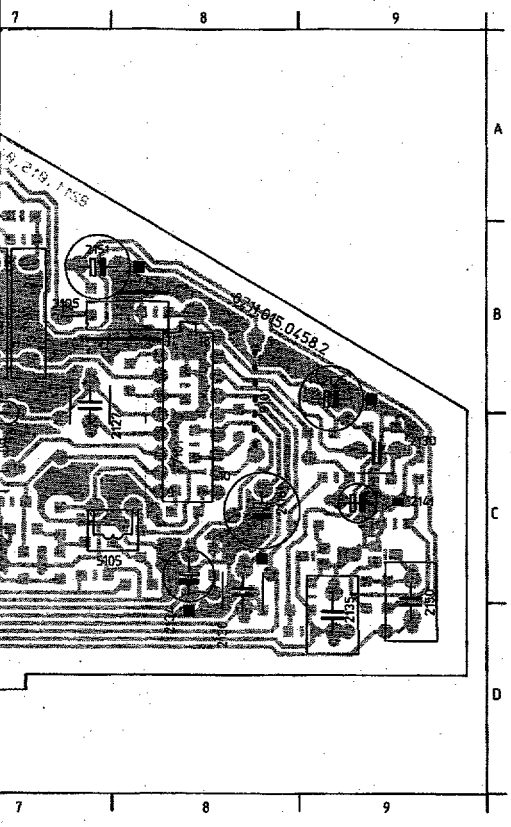

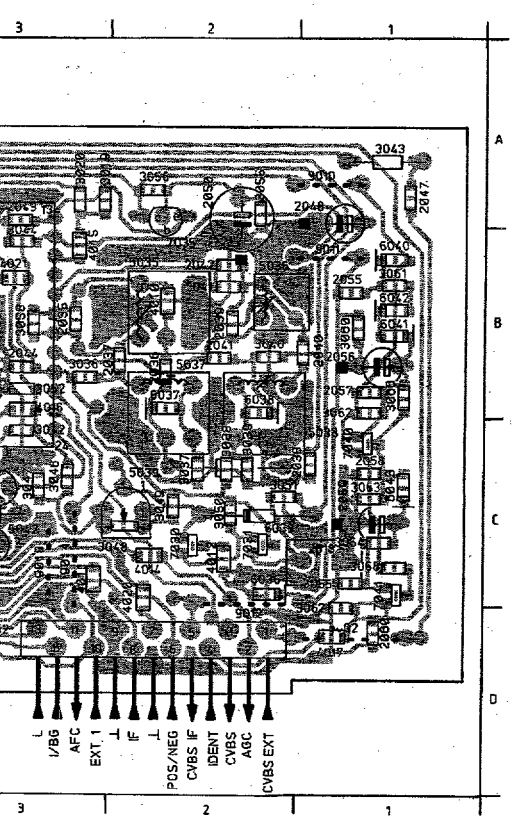

M50	D2	3108	C9
M51	D6	3109	C8
1010	B4	3110	B7
1042	C3	3111	A7
1043	C3	3112	C8
1102	B7	3113	B7
1103	B7	3114	C7
1150	C6	3115	B7
2011	C4	3116	B5
2012	B4	3117	B5
2013	B4	3118	C8
2014	B4	3119	C7
2015	C4	3120	C8
2016	B4	3121	C8
2017	A4	3122	C7
2018	C2	3123	C9
2019	C4	3124	C9
2035	B3	3125	C9
2036	B3	3126	D9
2037	B3	3127	C9
2038	C2	3129	C7
2039	B2	3130	D9
2040	B2	3131	B7
2041	B2	3132	C7
2042	B2	3140	C9
2044	B3	3141	C9
2047	A1	3142	C9
2048	A2	3143	C9
2049	A3	3144	B8
2050	A2	3150	C6
2055	B2	3151	C6
2056	B1	3152	C6
2057	B1	3153	C6
2058	C1	3154	C6
2059	C1	4010	B3
2060	D1	4011	C3
2080	C5	4012	C2
2081	C4	4013	A4
2082	C5	4014	C3
2113	B6	4015	B3
2114	B6	4016	B3
2115	B6	4017	D2
2116	B6	4018	C4
2117	A6	4019	C4
2118	C9	4020	C3
2124	B8	4021	B3
2125	B9	4080	C4
2126	B7	4081	C4
2127	B8	4100	A4
2129	C7	4101	B7
2130	C9	4102	A7
2131	A5	5010	C4
2132	B8	5035	B3
2133	B8	5036	B2
2134	C8	5037	B3
2135	D9	5038	B2
2136	C9	5039	C2
2137	C8	5041	A4
2138	C8	5042	C4
2139	C8	5080	C4
2141	C9	5105	C8
2143	C8	5150	B6
2150	C9	6036	C2
2151	B8	6037	B3
2160	C6	6038	B2
3012	B4	6039	C2
3013	B4	6040	B1
3014	B4	6041	B1
3015	B4	6042	B1
3016	B5	6043	C1
3017	B4	6105	B7
3019	A3	6106	A7
3020	A3	6108	C8
3021	B4	6112	C9
3030	B4	6150	C6
3031	C4	6151	C6
3036	B3	7000	C4
3037	C2	7030	C2
3038	C2	7031	C2
3039	C2	7035	A3
3040	B2	7040	C2
3041	B2	7041	C1
3042	C3	7100	B6
3044	B3	7101	B8
3046	C3	7102	B5
3047	C3	7103	C9
3048	C3	7104	C9
3049	C3	7150	C6
3050	C2	7151	C6
3051	C2	9002	D2
3052	B3	9010	A2
3055	A2	9011	B2
3056	A3	9012	C2
3058	B3	9014	C3
3060	B2	9016	A4
3061	B1	9017	A4
3062	B1	9018	C3
3063	C1	9026	C5
3064	C1	9028	B5
3065	C2	9030	C5
3066	B1	9031	C5
3067	C2	9032	C5
3068	C1	9100	C5
3080	C7	9101	B9
3081	C4	9102	B7
3104	A5	9104	C7
3105	B8	9105	B7
3107	A7	9106	C6

Stereo IF/sound module / Stereo ZF/Tonmodul /

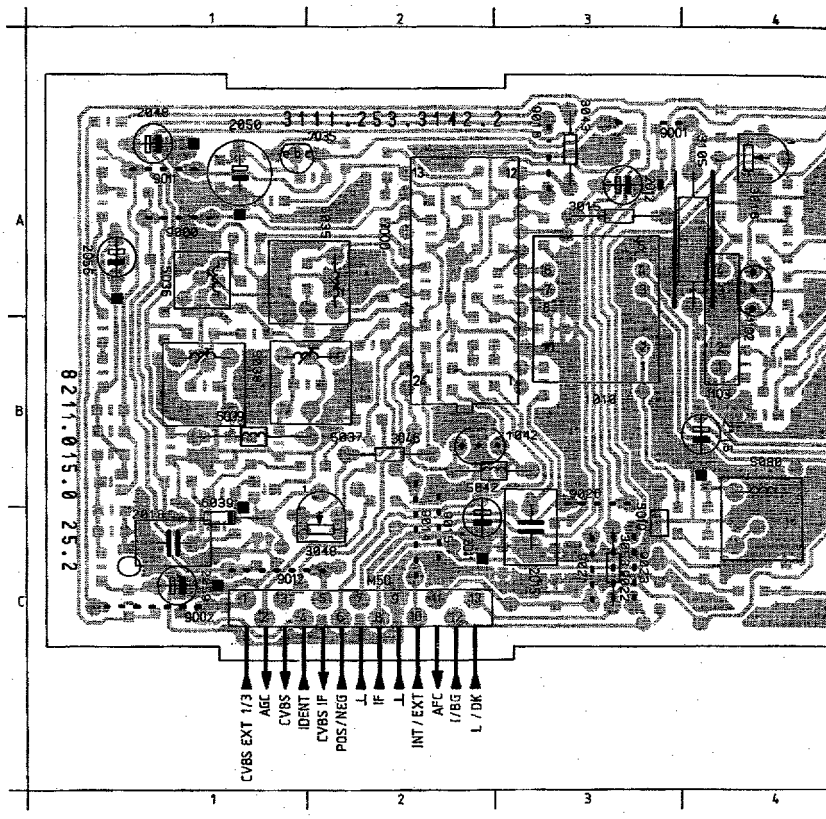

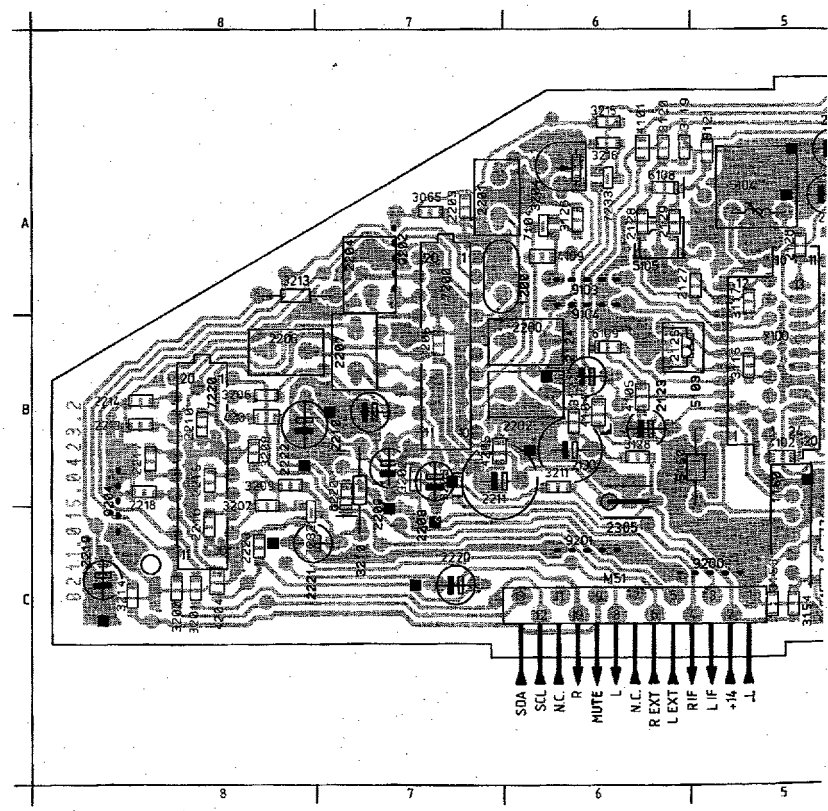

Module FI/son stéréo

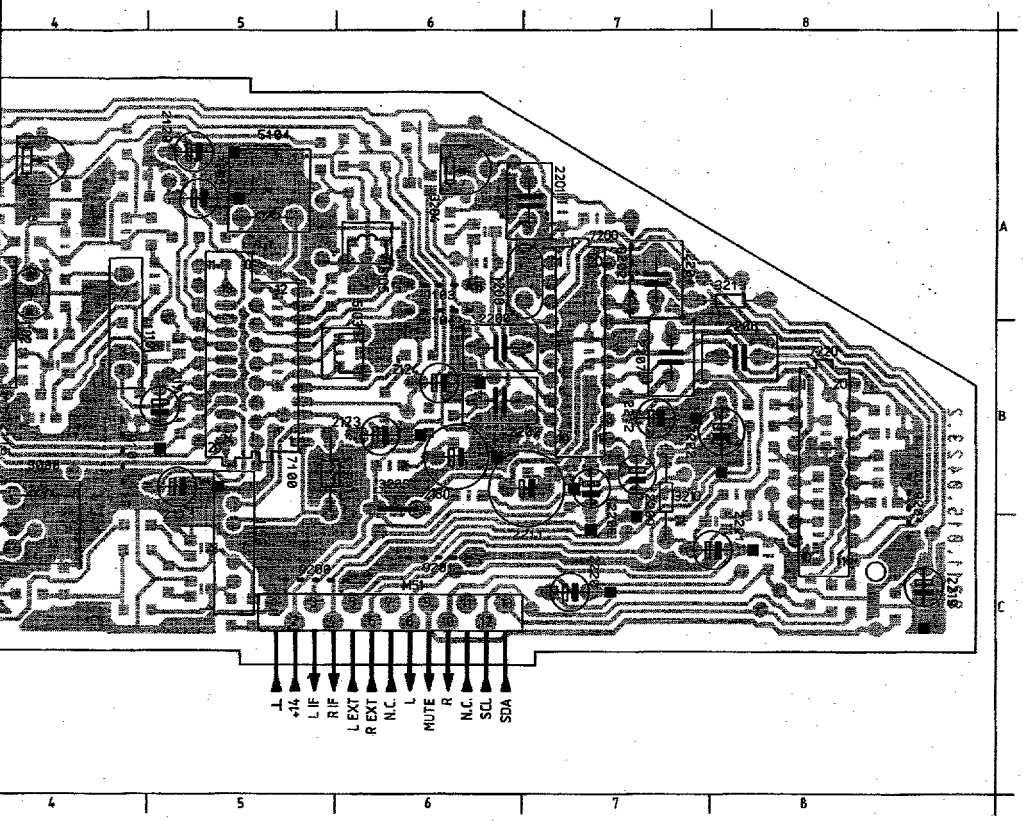

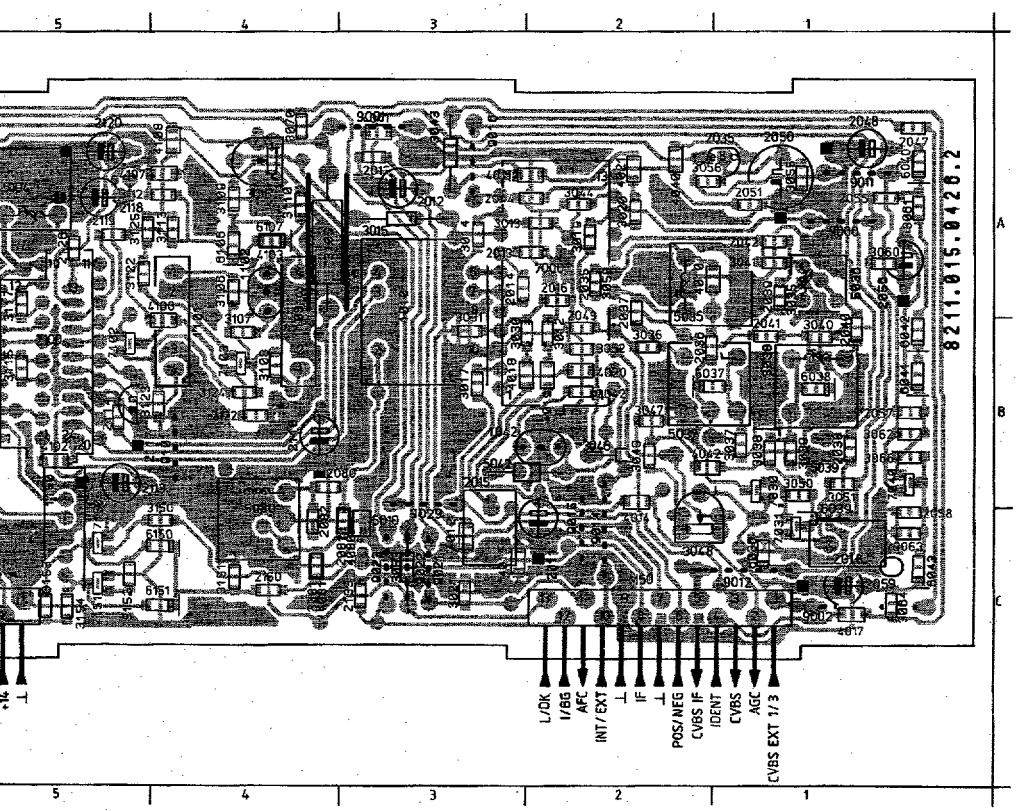

M50 C2
M51 C6
1010 B4
1042 B3
1101 A5
1102 A4
1103 B4
1150 C5
1200 A7
2011 C3
2012 A3
2013 A3
2014 A3
2015 C3
2016 A3
2017 A4
2018 C1
2035 A2
2036 B2
2037 A2
2038 B1
2039 A1
2040 B1
2041 B1
2042 A1
2044 A3
2048 A1
2049 B2
2050 A1
2051 A2
2055 A1
2056 A1
2057 B1
2058 C1
2059 C1
2080 B4
2081 C4
2082 C4
2113 B5
2114 B5
2115 B4
2117 B5
2118 A5
2119 A5
2120 A5
2122 B4
2123 B6
2124 B6
2125 B6
2126 A5
2127 A6
2128 A6
2129 A6
2130 B6
2133 C4
2160 C4
2200 B7
2201 A7
2202 B7
2203 A7
2204 A7
2205 B7
2206 B8
2207 B8
2208 B7
2209 B7
2210 B8
2211 B7
2212 B7
2213 B9
2214 B9
2215 B8
2216 C8
2217 B9
2218 B9
2219 C9
2220 C7
2221 C8
2222 B8
2223 C8
3012 B3
3013 A3
3014 A3
3015 A3
3016 A4
3017 B3
3019 A2
3020 A2
3021 C3
3030 B3
3031 B3
3035 A1
3036 B2
3037 B2
3038 B1
3039 B1
3040 B1
3041 A1
3042 B2
3043 A3
3044 A2
3046 B2
3047 B2
3048 C2
3049 B2
3050 B1
3051 B1
3052 B2
3053 C3
3055 A1
3056 A2
3058 A2
3060 A1
3061 A1
3062 B1
3063 C1
3064 C1
3065 A7
3066 B1
3070 A4
3081 C4
3105 A4
3106 A4
3107 B4
3108 B4
3109 A4
3110 A4
3112 A5
3113 A5
3115 B5
3117 A5
3119 A6
3120 A6
3121 A6
3122 A5
3123 B5
3124 B4
3125 A5
3126 A6
3127 B6
3128 B6
3150 C5
3151 C4
3152 C5
3153 C5
3154 C5
3200 C9
3201 C8
3202 B7
3203 B7
3204 A6
3205 C6
3206 B8
3207 C8
3208 B8
3209 B8
3210 B8
3211 B6
3213 A8
3214 C9
3215 A6
3216 A6
4010 A2
4011 C3
4012 C3
4014 B2
4015 A3
4017 C1
4018 B3
4019 B3
4020 B2
4021 A2
4040 A2
4041 A4
4042 B2
4080 C4
4081 C4
4100 B5
4101 A6
4102 B5
4103 A4
4104 B6
4105 B6
4107 A5
4108 A5
4109 A7
4201 B8
4204 C8
4205 B7
5010 C4
5035 A2
5036 A1
5037 B2
5038 B1
5039 B1
5042 B3
5080 C4
5103 B6
5104 A5
5105 A6
5150 B6
6036 C2
6037 B2
6038 B1
6039 C1
6040 A1
6041 B1
6042 B1
6043 C1
6106 A4
6107 A4
6108 A6
6109 B6
6150 C5
6151 C5
6220 B8
7000 B3
7030 B2
7031 C1
7035 A2
7040 B1
7100 B5
7102 B5
7103 B4
7104 A7
7150 C5
7151 C5
7200 A7
7220 B8
7232 C8
7233 A6
9000 A1
9001 A4
9002 C1
9011 A1
9012 C2
9014 C2
9015 C2
9016 A3
9021 C3
9022 C3
9023 C4
9026 C3
9101 B5
9103 A6
9104 A6
9200 C6
9201 C6
9202 A7
9204 C9

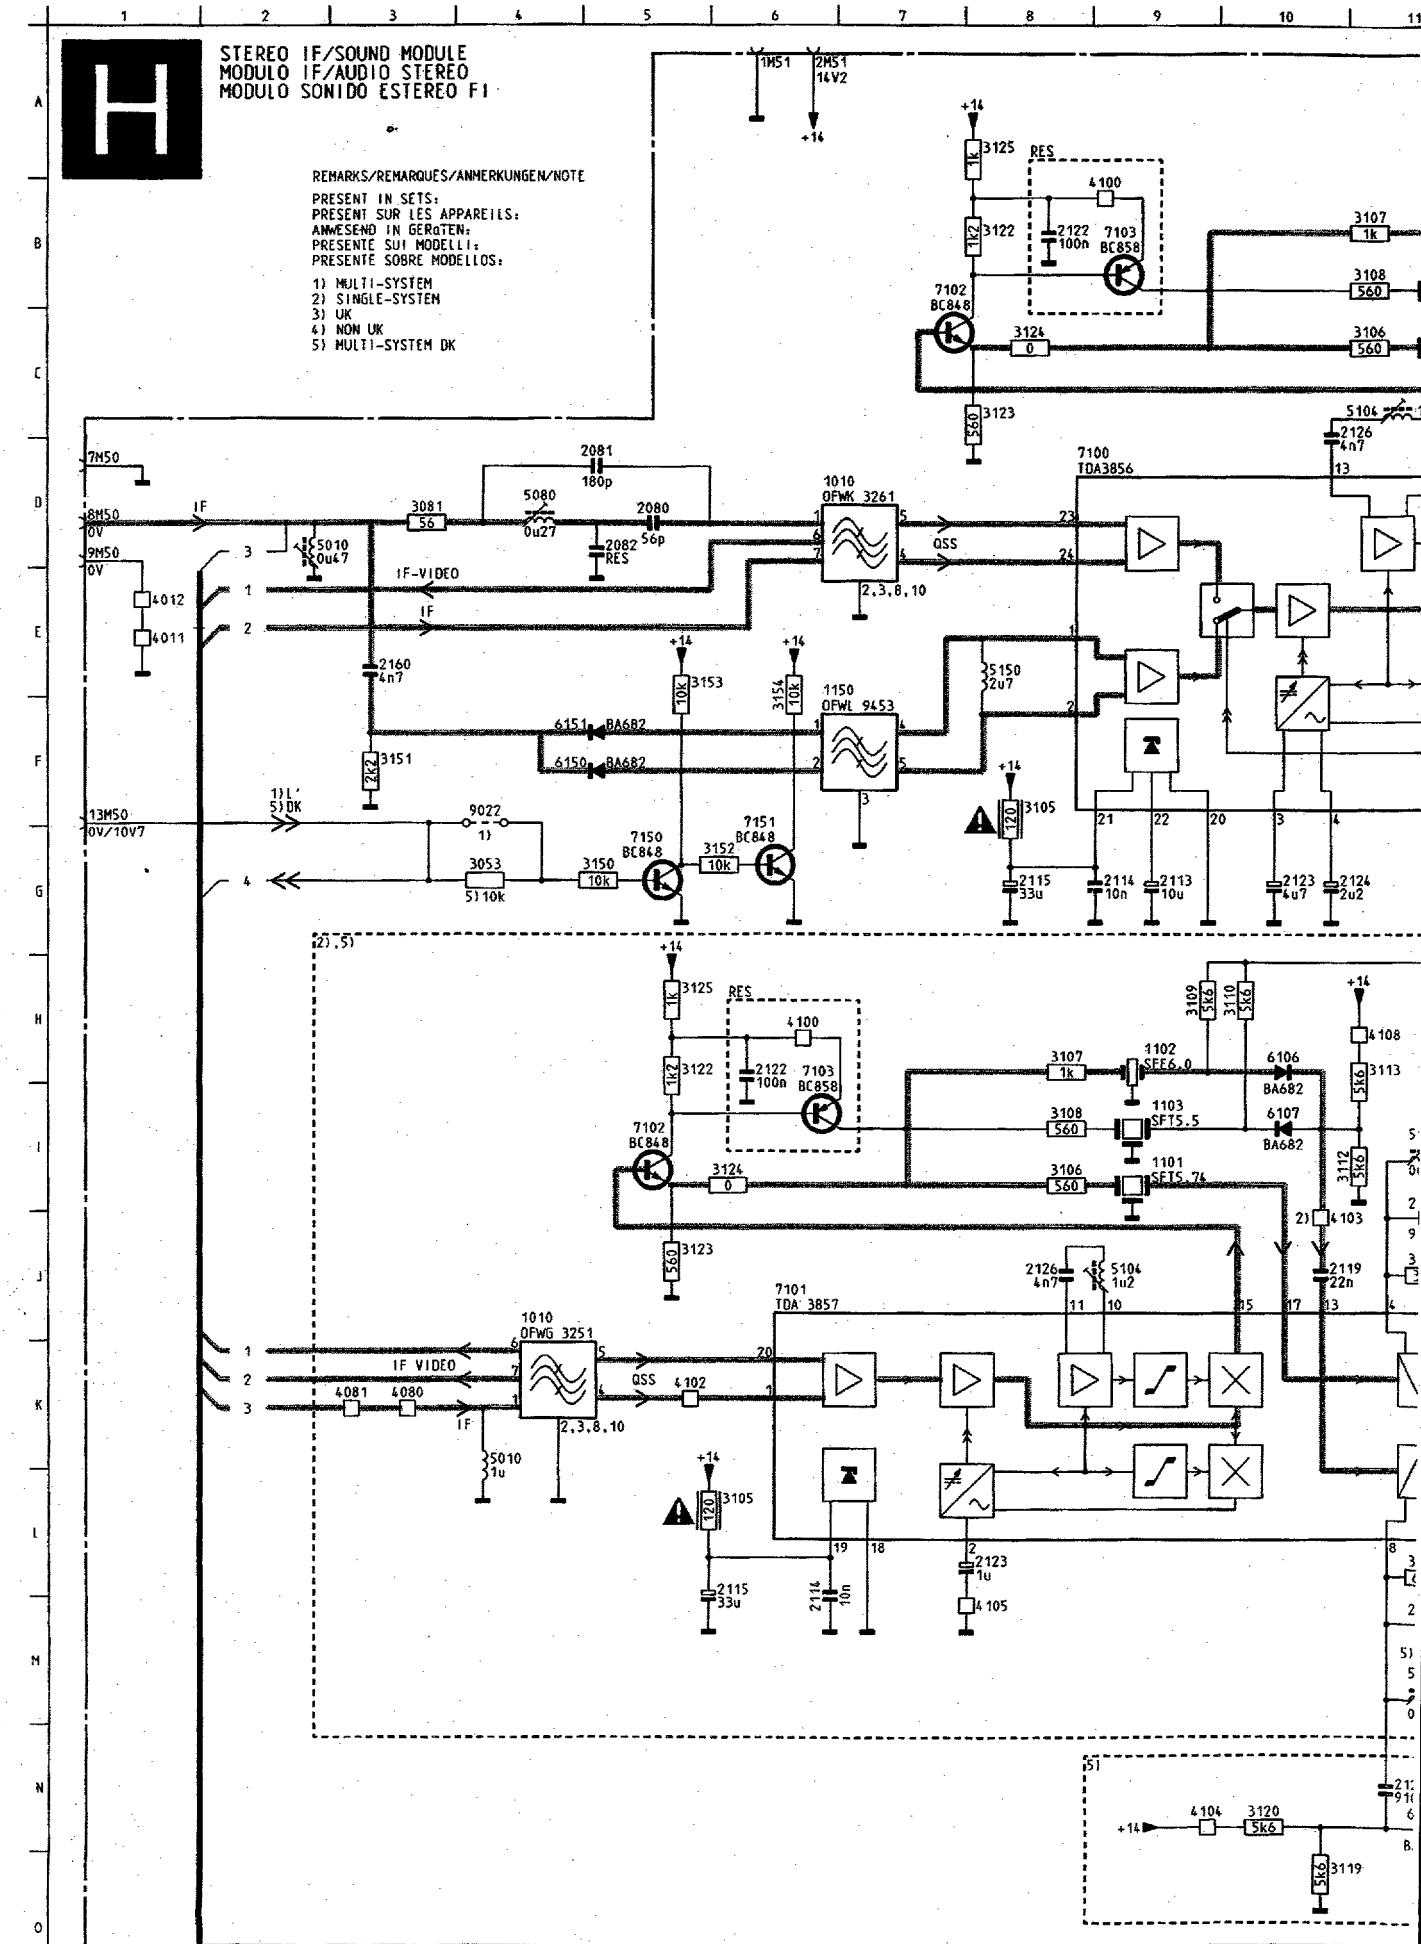
H
STEREO IF/SOUND MODULE
MODULO IF/AUDIO STEREO
MODULO SONIDO ESTEREO FI
REMARKS/REMARQUES/ANMERKUNGEN/NOTE
PRESENT IN SETS:
PRESENT SUR LES APPAREILS:
ANWESEND IN GERäTEN:
PRESENTE SUI MODELLI:
PRESENTE SOBRE MODELLOS:
1) MULTI-SYSTEM
2) SINGLE-SYSTEM
3) UK
4) NON UK
5) MULTI-SYSTEM DK
7100 TDA3856
7101 TDA 3857
1010 OFWK 3261
1010 OFWG 3251
1150 OFWL 9453
IF
IF-VIDEO
QSS
RES

Module FI/son stéréo

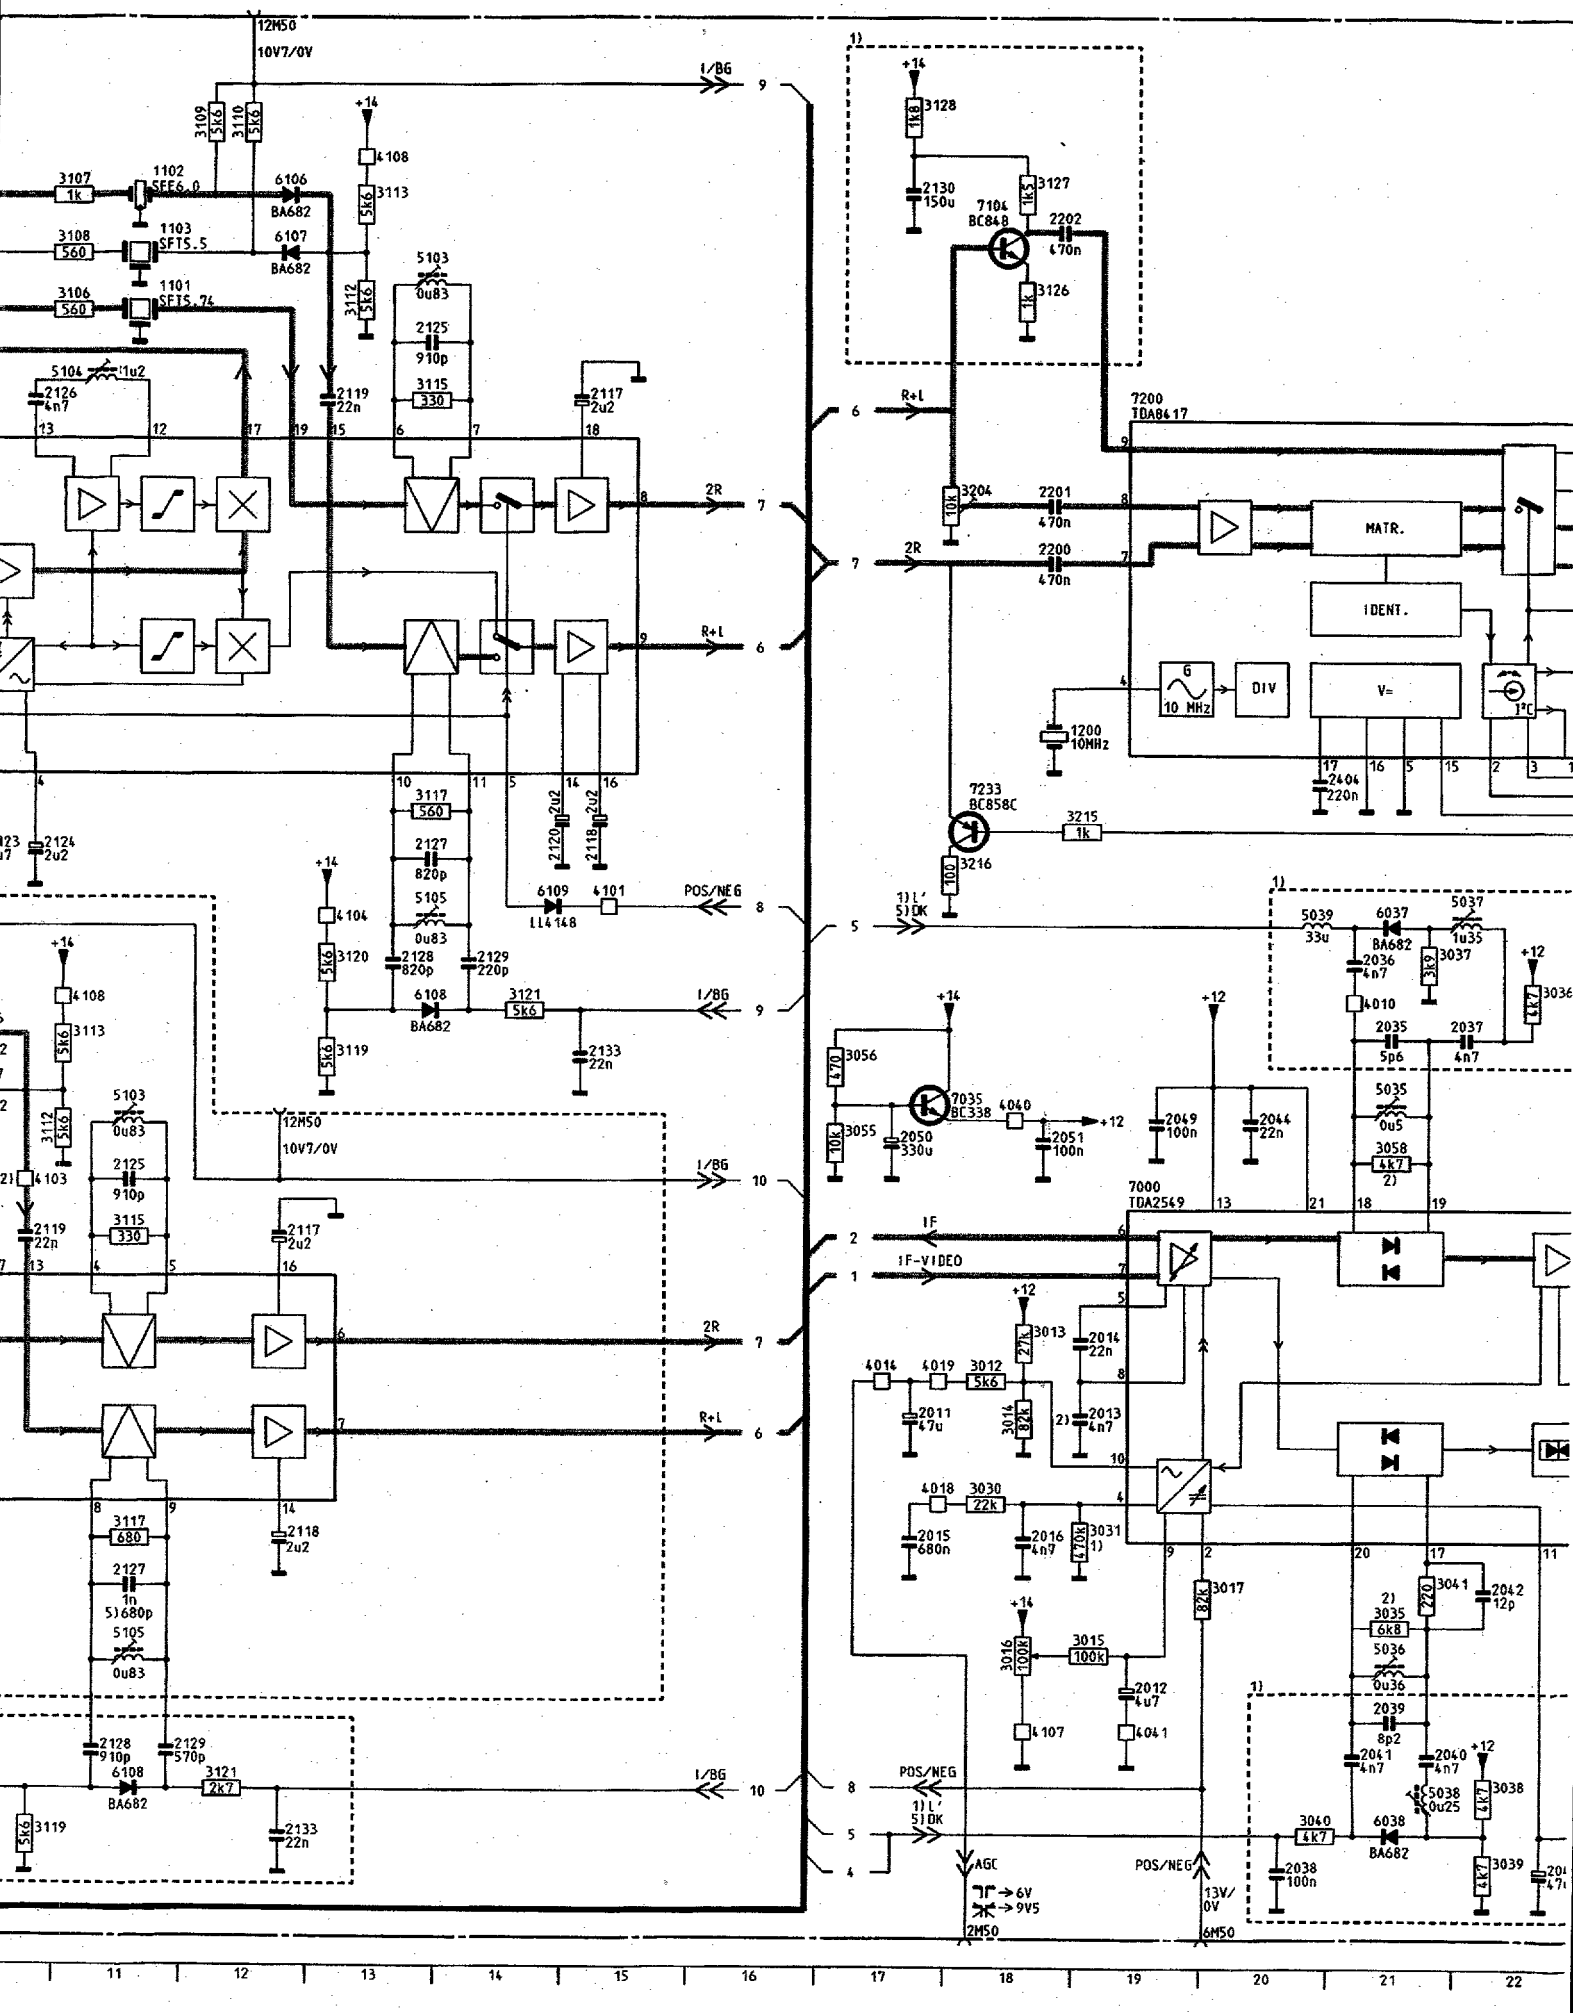

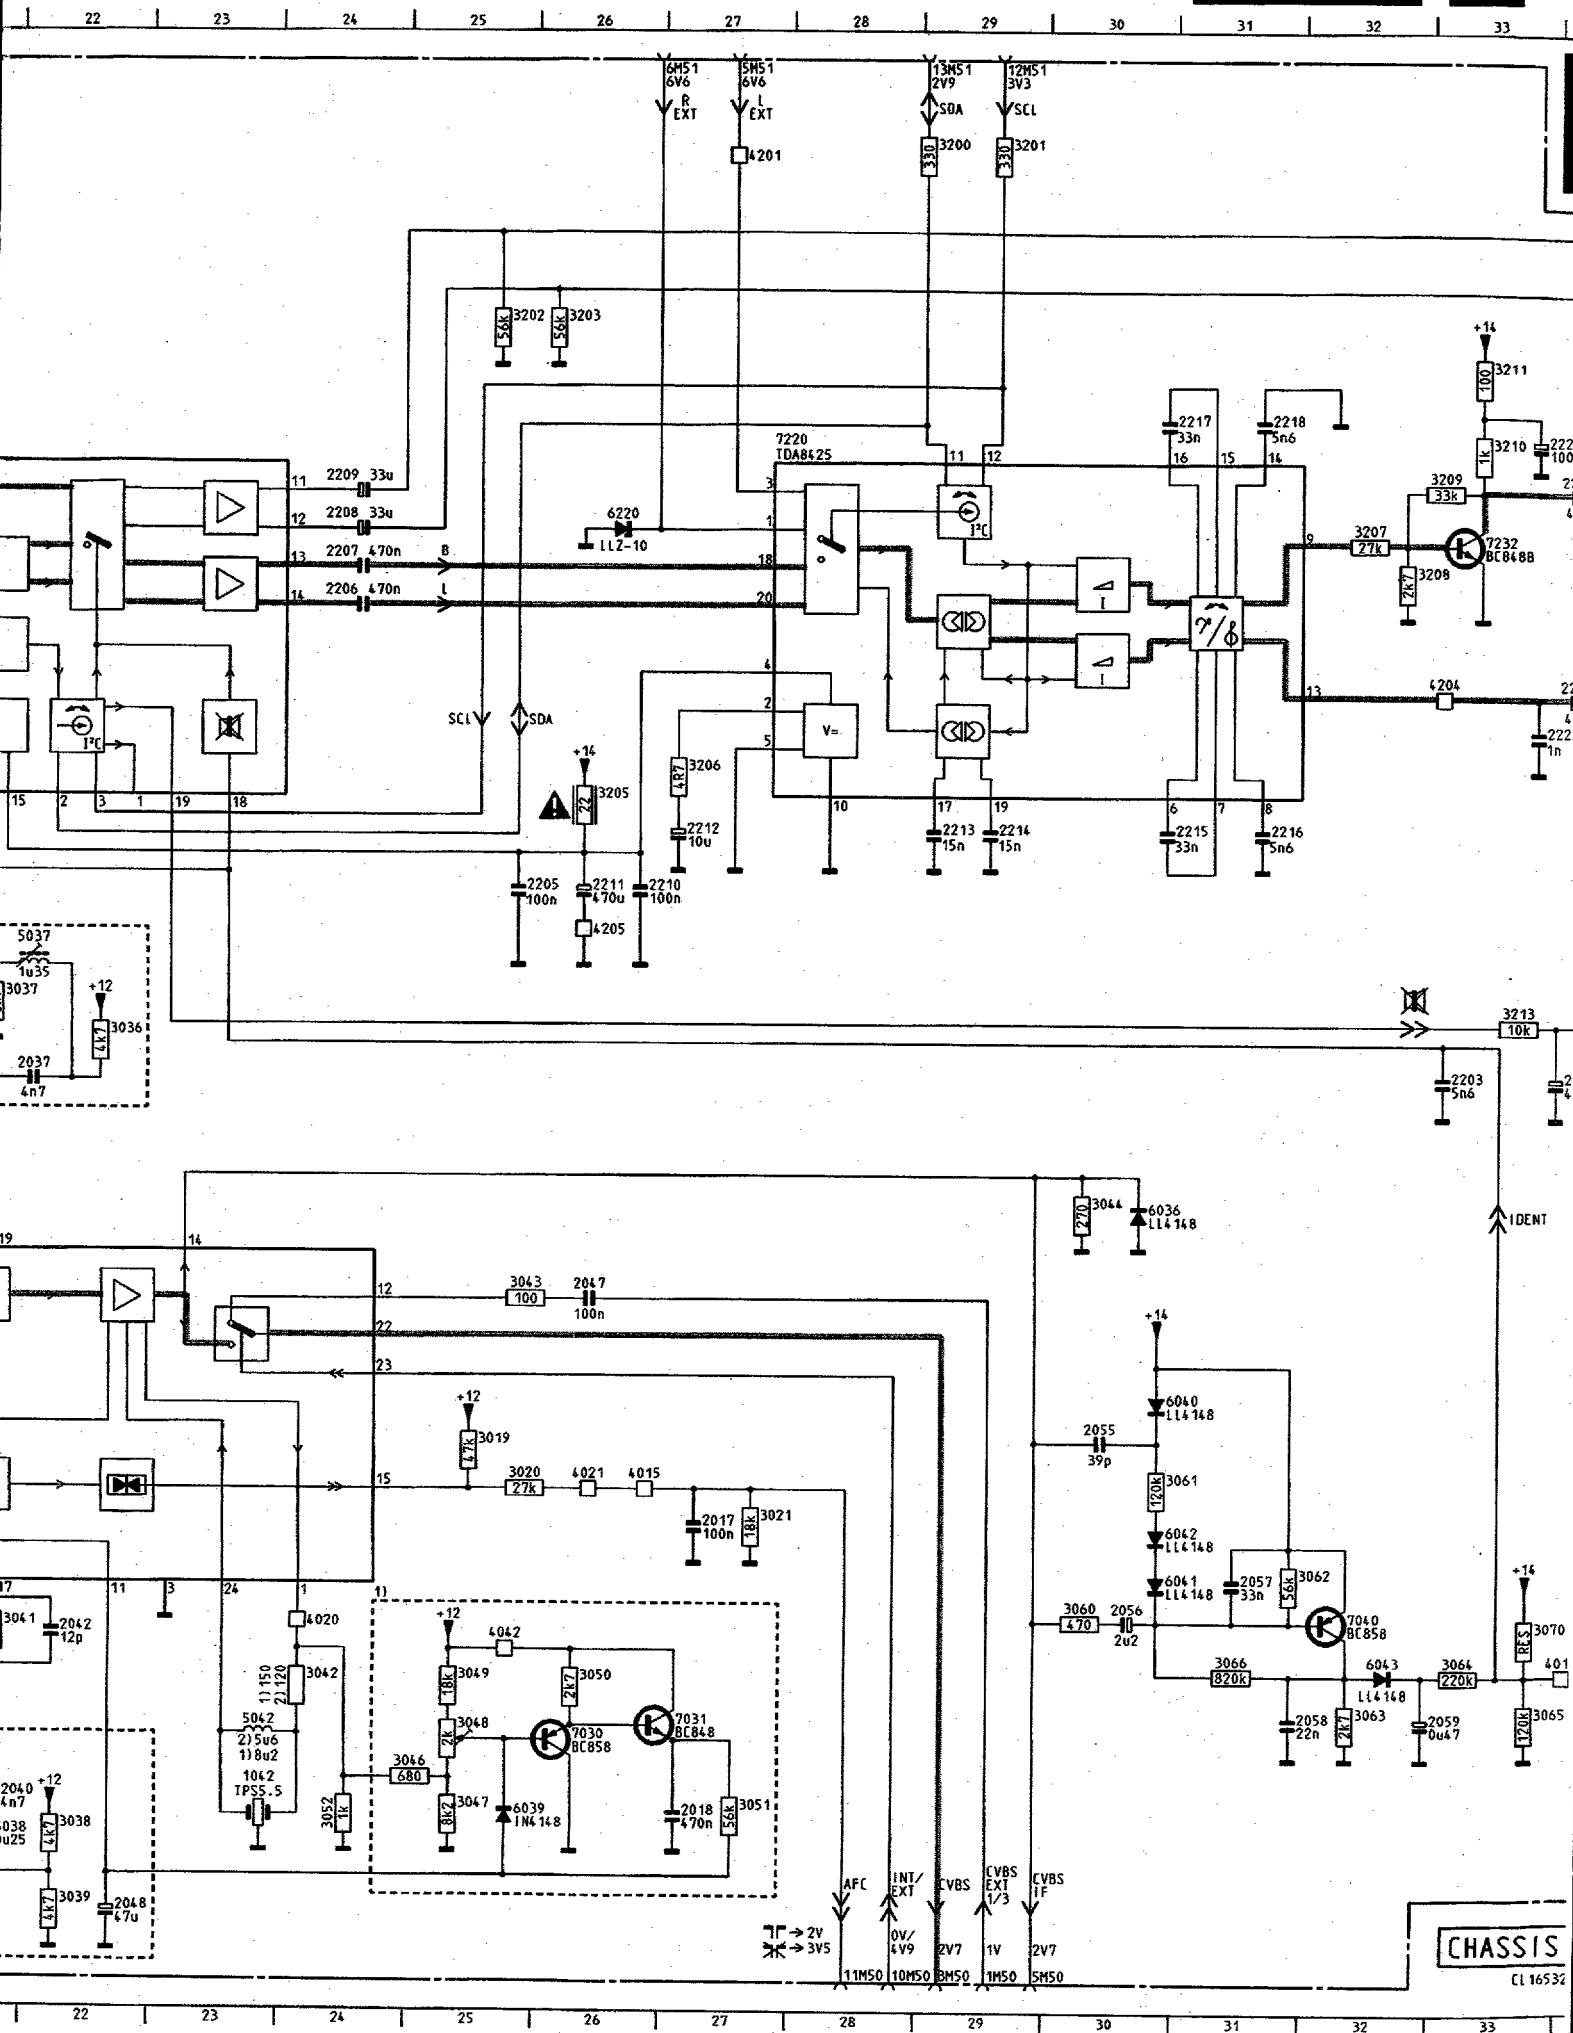
6M51 6V6 R EXT
5M51 6V6 L EXT
13M51 2V9 SDA
12M51 3V3 SCL
4201
3200
3201
3202
3203
7220 TDA8425
6220 LLZ-10
2209 33u
2208 33u
2207 470n
2206 470n
SCL
SDA
3205
3206
2212 10u
2205 100n
2211 470u
2210 100n
4205
2213 15n
2214 15n
2215 33n
2216 5n6
2217 33n
2218 5n6
3207 27k
7232 BC848B
3208 2k7
3209 33k
3210 1k
3211 100
4204
5037 1u35
3037
2037 4n7
3036 4k7
3213 10k
2203 5n6
IDENT
3044 270
6036 LL4148
3043 100
2047 100n
3019 47k
3020 27k
4021
4015
2017 100n
3021 18k
4020
4042
3049 18k
3050 2k7
3048 2k
7030 BC858
7031 BC848
3046 680
3047 8k2
6039 1N4148
2018 470n
3051 56k
3052 1k
5042 2)5u6 1)8u2
1042 TPS5.5
3042 1150 2120
3041
2042 12p
3038 4k7
3039 4k7
2048 47u
6040 LL4148
6042 LL4148
6041 LL4148
2055 39p
3061 120k
2056 2u2
3060 470
2057 33n
3062 56k
7040 BC858
3066 820k
6043 LL4148
3064 220k
2058 22n
3063 2k7
2059 0u47
3065 120k
3070 RES
AFC
INT/ EXT
CVBS
CVBS EXT 1/3
CVBS IF
→2V →3V5
11M50
10M50
8M50
1M50
5M50
0V/ 4V9
2V7
1V
CHASSIS
CL 16532

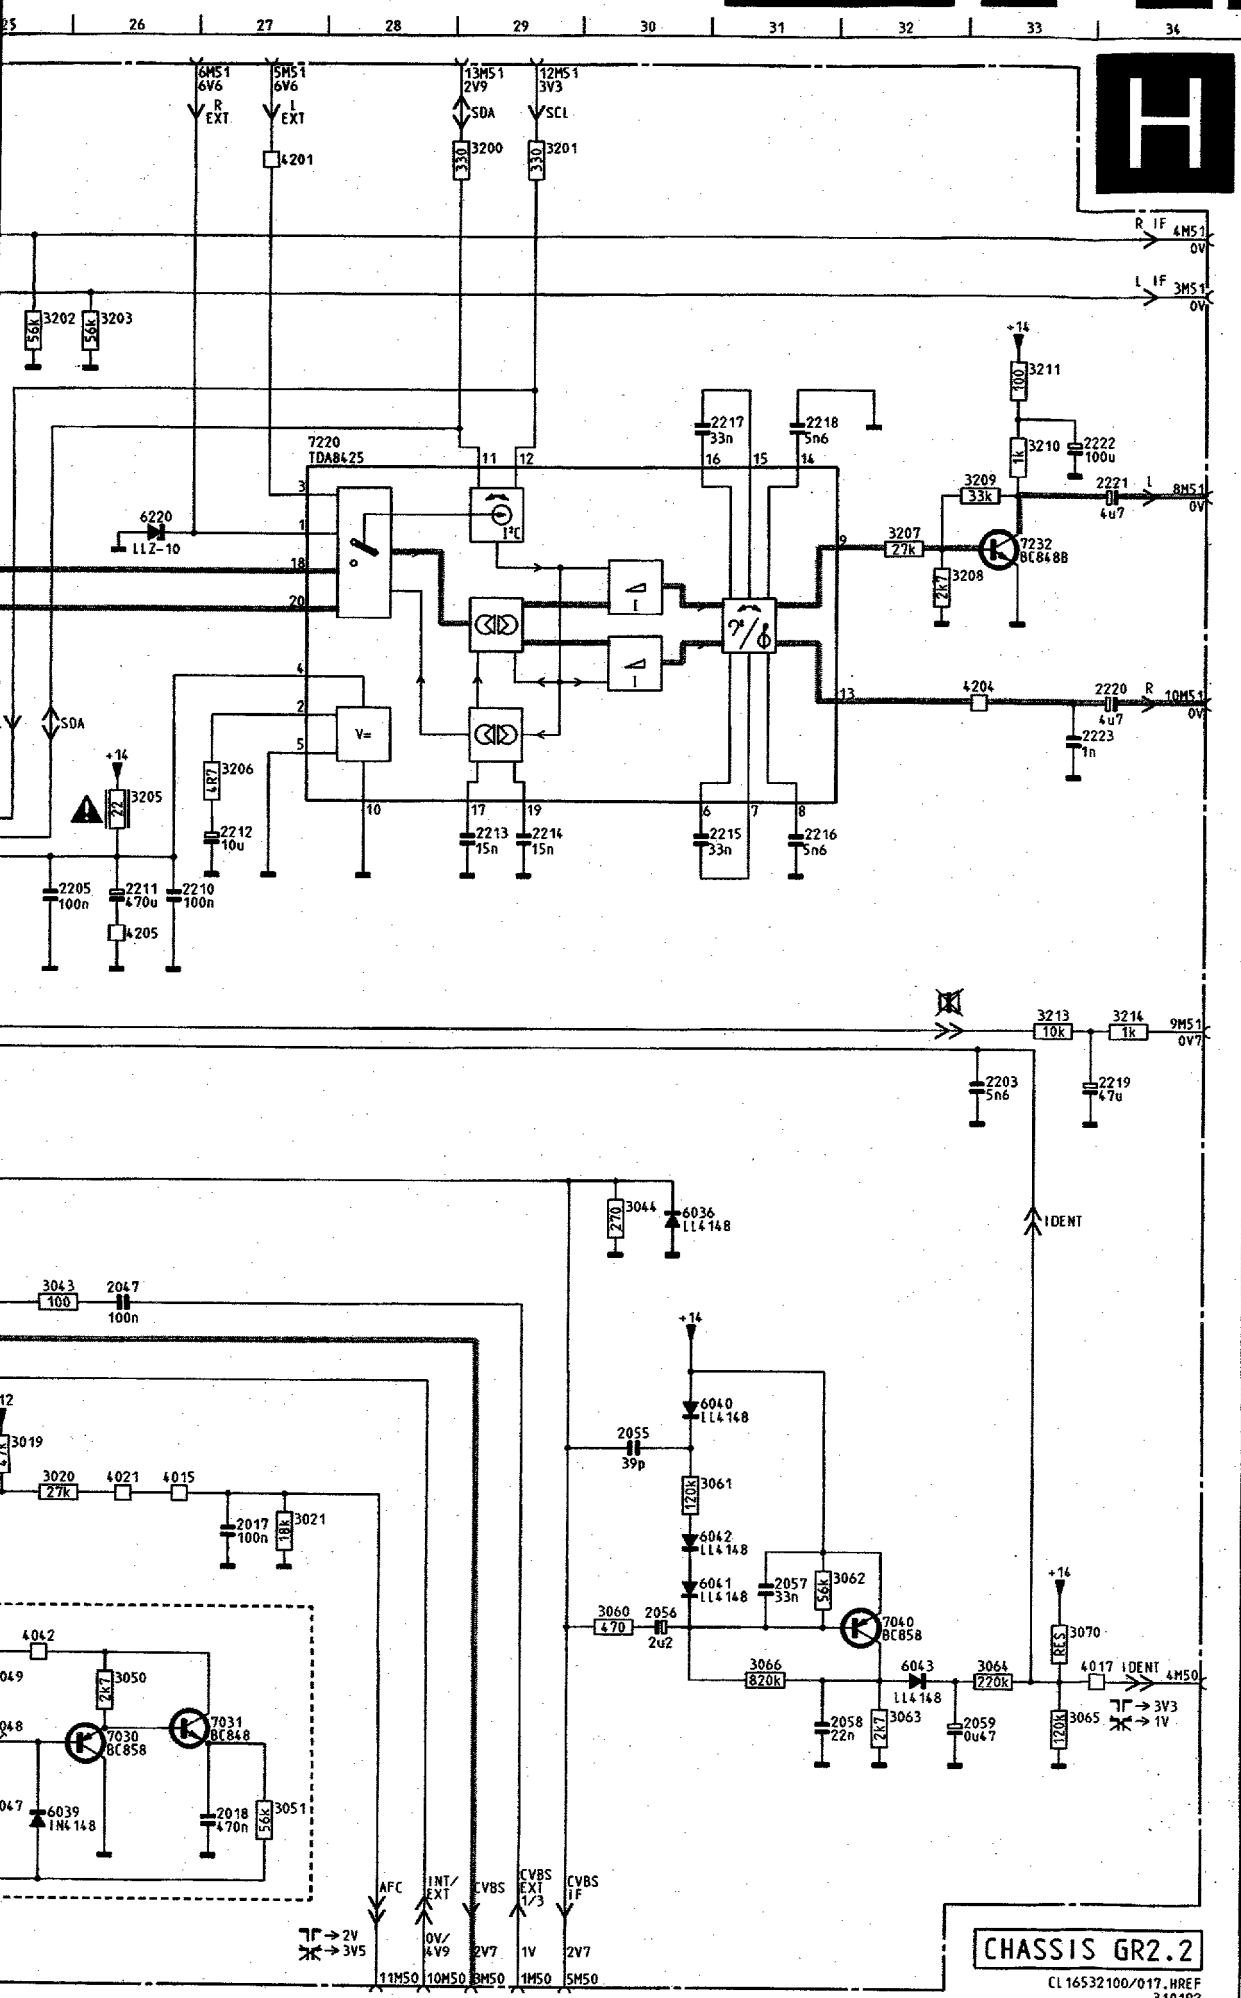

1010	D 6	3044	I30	5080	D 4
1010	J 4	3046	N25	5103	B13
1042	N23	3047	N25	5103	I11
1101	C11	3048	M25	5104	J 9
1101	I 9	3049	M25	5104	C11
1102	B11	3050	M26	5105	G13
1102	H 9	3051	N27	5105	M11
1103	B11	3052	N24	5150	E 8
1103	I 9	3053	G 4	6036	I30
1150	F 6	3055	I17	6037	G21
1200	F18	3056	I17	6038	O21
2011	K17	3058	I21	6039	N25
2012	N19	3060	M30	6040	K30
2013	K19	3061	K30	6041	L30
2014	K19	3062	L31	6042	L30
2015	L17	3063	M32	6043	M32
2016	L18	3064	M33	6106	B12
2017	L27	3065	M33	6106	H10
2018	N27	3066	M31	6107	B12
2035	H21	3070	M33	6107	I10
2036	H21	3081	D 3	6108	H13
2037	H22	3105	F 8	6108	N11
2038	O20	3105	L 6	6109	G14
2039	N21	3106	C11	6150	F 5
2040	N21	3106	I 8	6151	F 5
2041	N21	3107	B11	6220	D26
2042	M22	3107	H 8	7000	J19
2044	I20	3108	B11	7030	N26
2047	J26	3108	I 8	7031	M27
2048	O22	3109	A12	7035	I18
2049	I19	3109	H 9	7040	M32
2050	I17	3110	A12	7100	D 8
2051	I18	3110	H10	7101	J 6
2055	K30	3112	C13	7102	B 7
2056	M30	3112	I11	7102	I 5
2057	L31	3113	B13	7103	B 9
2058	M31	3113	H11	7103	H 6
2059	M33	3115	C13	7104	B18
2080	D 5	3115	J11	7150	G 5
2081	D 5	3117	G13	7151	G 6
2082	D 5	3117	L11	7200	D19
2113	G 9	3119	I13	7220	D27
2114	G 9	3119	O10	7232	D33
2114	L 6	3120	H13	7233	G18
2115	G 8	3120	N10	9022	F 4
2115	L 6	3121	H14		
2117	C15	3121	N12		
2117	J12	3122	B 8		
2118	G15	3122	H 5		
2118	L12	3123	C 8		
2119	C13	3123	J 5		
2119	J10	3124	C 8		
2120	G14	3124	I 6		
2122	B 8	3125	A 8		
2122	H 6	3125	H 5		
2123	G10	3126	C18		
2123	L 8	3127	B18		
2124	G10	3128	A17		
2125	C13	3150	G 5		
2125	I11	3151	F 3		
2126	C10	3152	G 6		
2126	J 8	3153	E 5		
2127	G13	3154	E 6		
2127	M11	3200	A29		
2128	H13	3201	A29		
2128	N11	3202	B25		
2129	H14	3203	B26		
2129	N11	3204	D18		
2130	B17	3205	F26		
2133	I15	3206	F27		
2133	O12	3207	D32		
2160	E 3	3208	D32		
2200	E18	3209	D33		
2201	D18	3210	C33		
2202	B18	3211	C33		
2203	H33	3213	H33		
2205	G25	3214	H34		
2206	E24	3215	G19		
2207	D24	3216	G18		
2208	D24	4010	H21		
2209	D24	4011	E 1		
2210	G26	4012	E 1		
2211	G26	4014	K17		
2212	G27	4015	L26		
2213	G29	4017	M34		
2214	G29	4018	L17		
2215	G31	4019	K17		
2216	G31	4020	M24		
2217	C31	4021	L26		
2218	C31	4040	I18		
2219	H34	4041	N19		
2220	E34	4042	M25		
2221	D34	4080	K 3		
2222	C33	4081	K 3		
2223	F33	4100	B 9		
2404	F20	4100	H 6		
3012	K18	4101	G15		
3013	K18	4102	K 5		
3014	K18	4103	J10		
3015	M19	4104	G13		
3016	M18	4104	N 9		
3017	M20	4105	M 8		
3019	K25	4107	N18		
3020	L25	4108	B13		
3021	L27	4108	H11		
3030	L18	4201	A27		
3031	L19	4204	E33		
3035	M21	4205	G26		
3036	H22	5010	K 4		
3037	H21	5010	D 2		
3038	N22	5035	I21		
3039	O22	5036	M21		
3040	O20	5037	G22		
3041	M21	5038	N21		
3042	N24	5039	H20		
3043	J25	5042	M23		

REMARKS/REMARQUES/ANMERKUNGEN/NOTE

PRESENT IN SETS:
PRESENT SUR LES APPAREILS:
ANWESEND IN GERÄTEN:
PRESENTE SUI MODELLI:
PRESENTE SOBRE MODELLOS:

1) PAL I
2) PAL BG

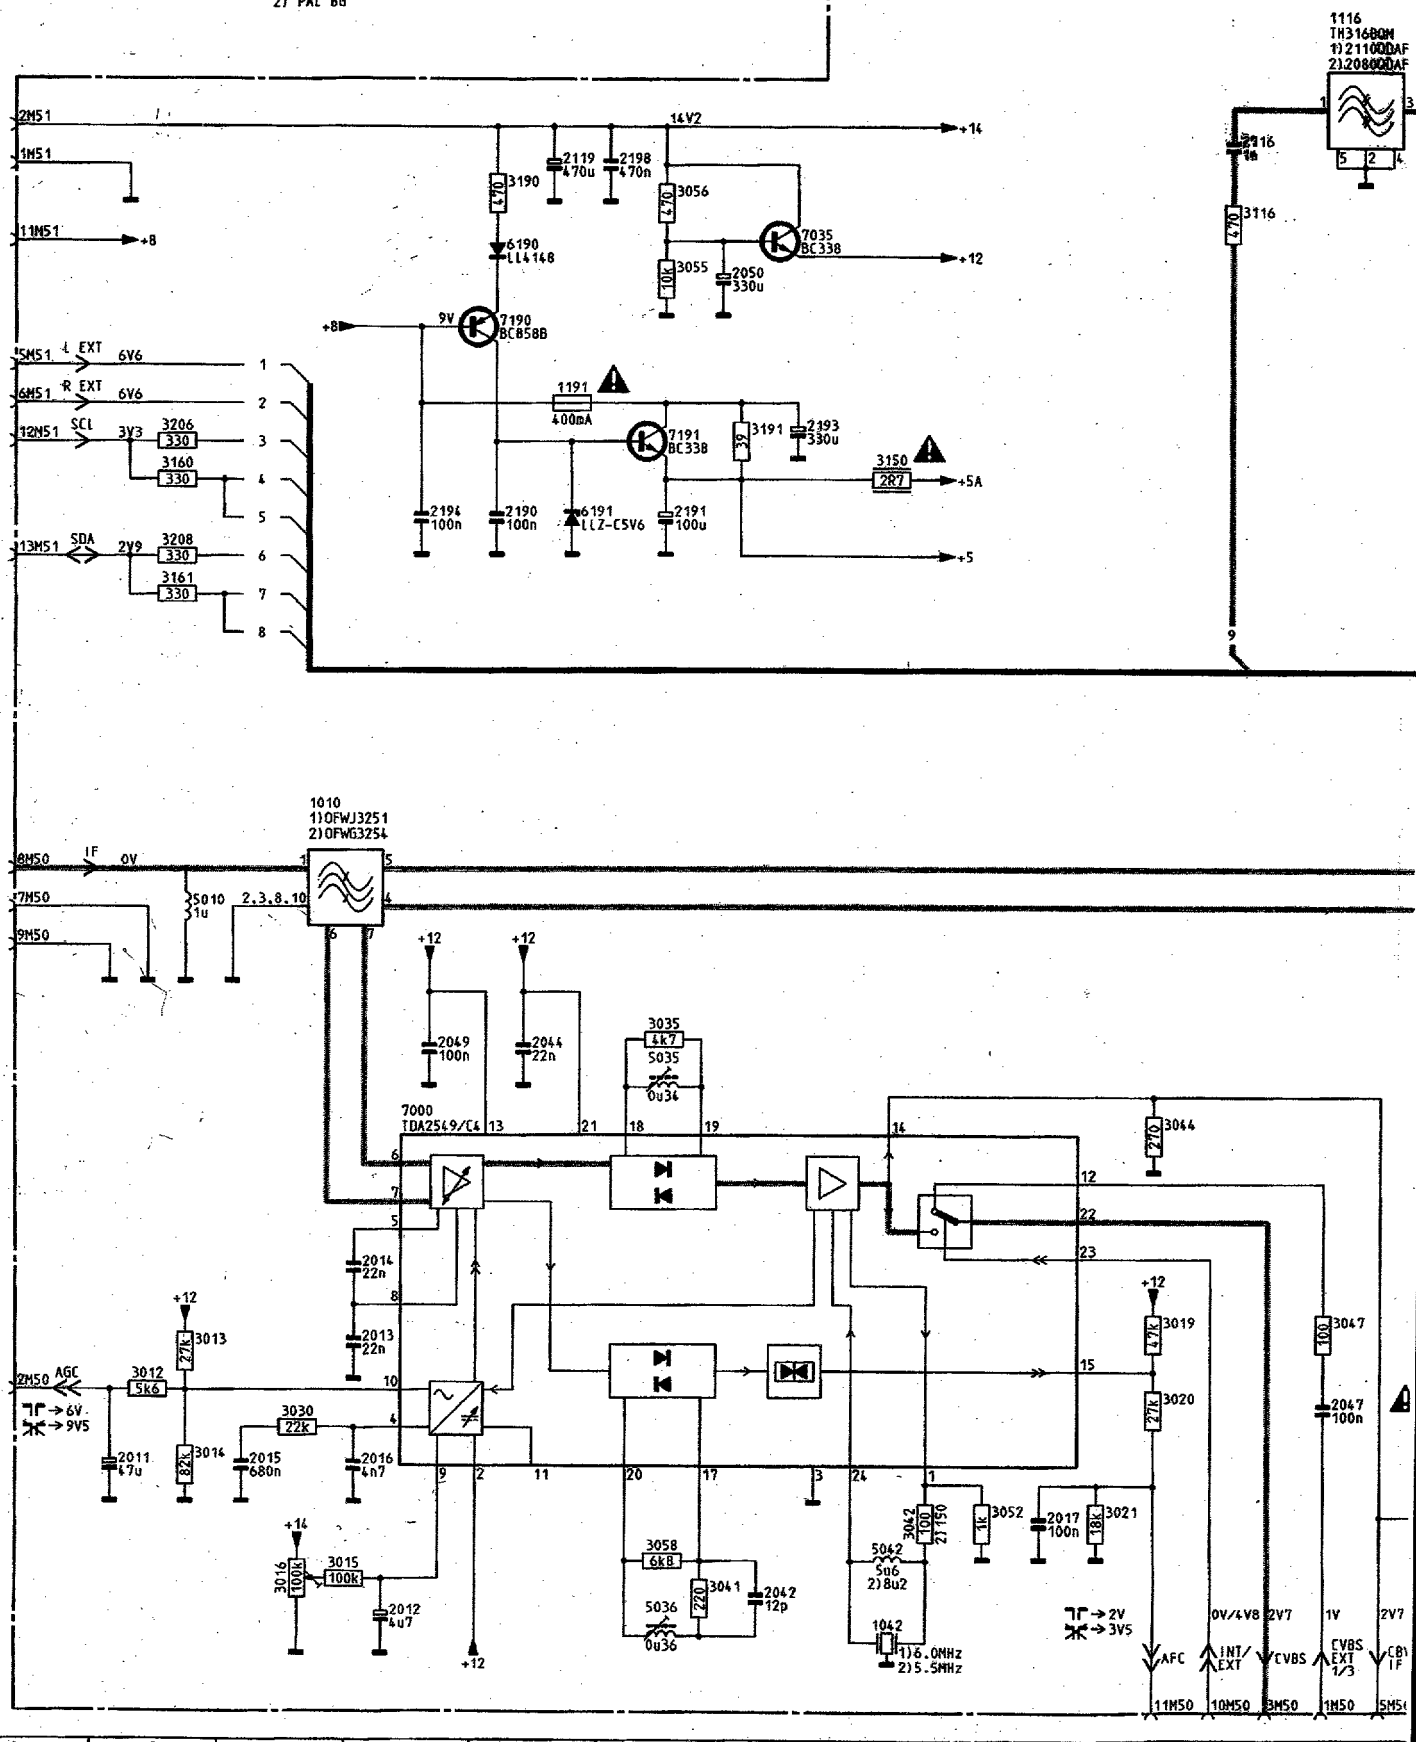

REMARKS/REMARQUES/ANMERKUNGEN/NOTE

PRESENT IN SETS:
PRESENT SUR LES APPAREILS:
ANWESEND IN GERÄTEN:
PRESENTE SUI MODELLI:
PRESENTE SOBRE MODELLOS:

1) PAL I
2) PAL BG

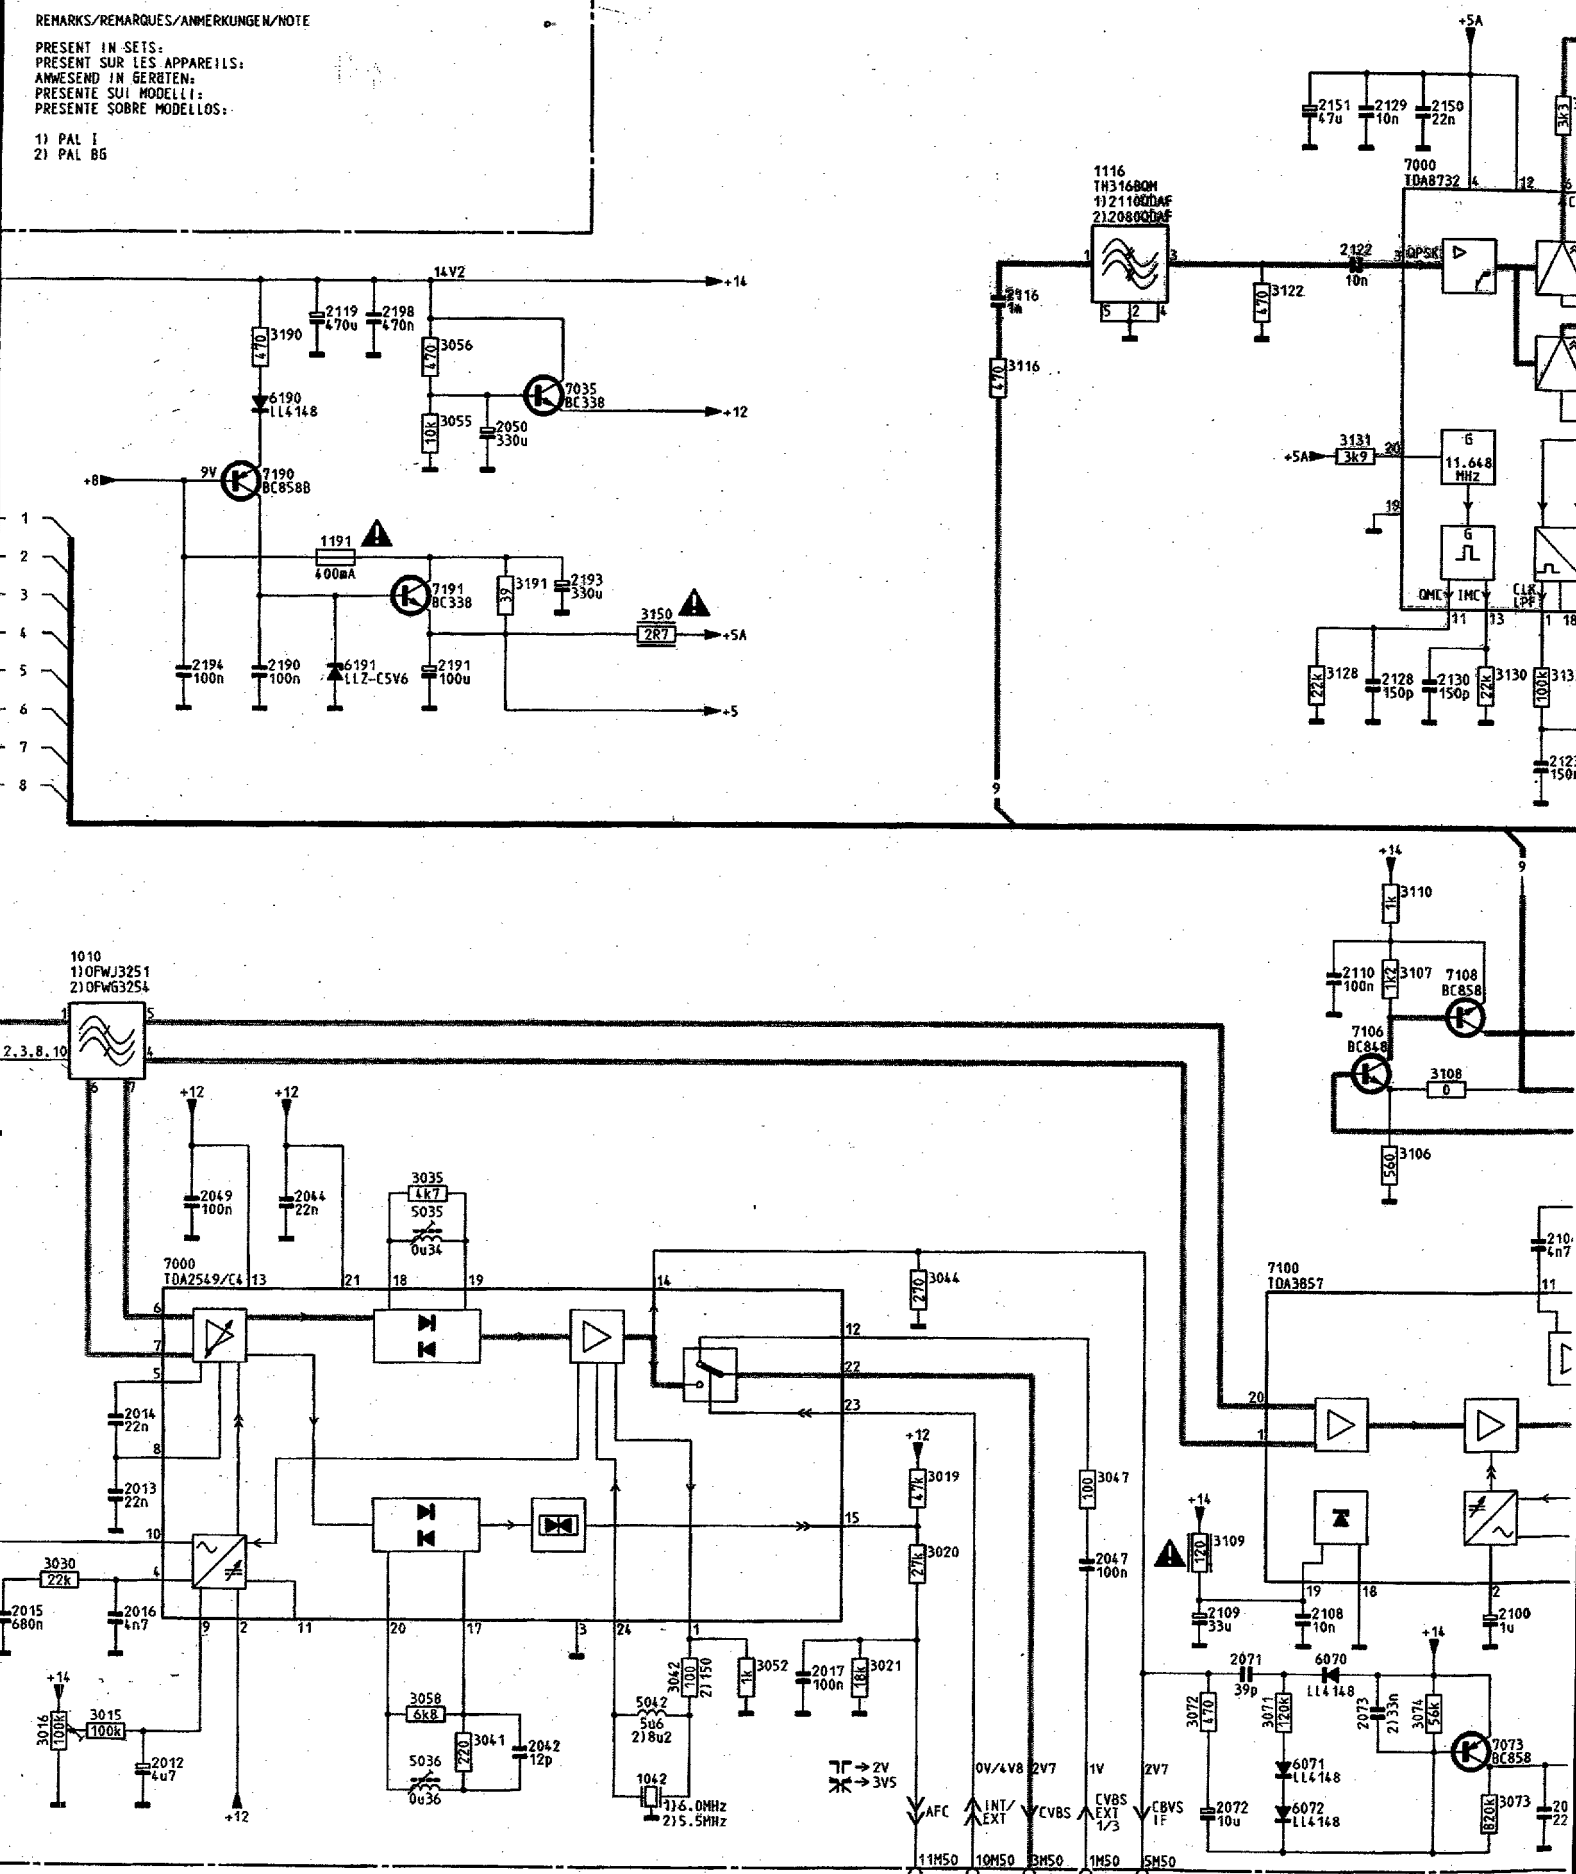

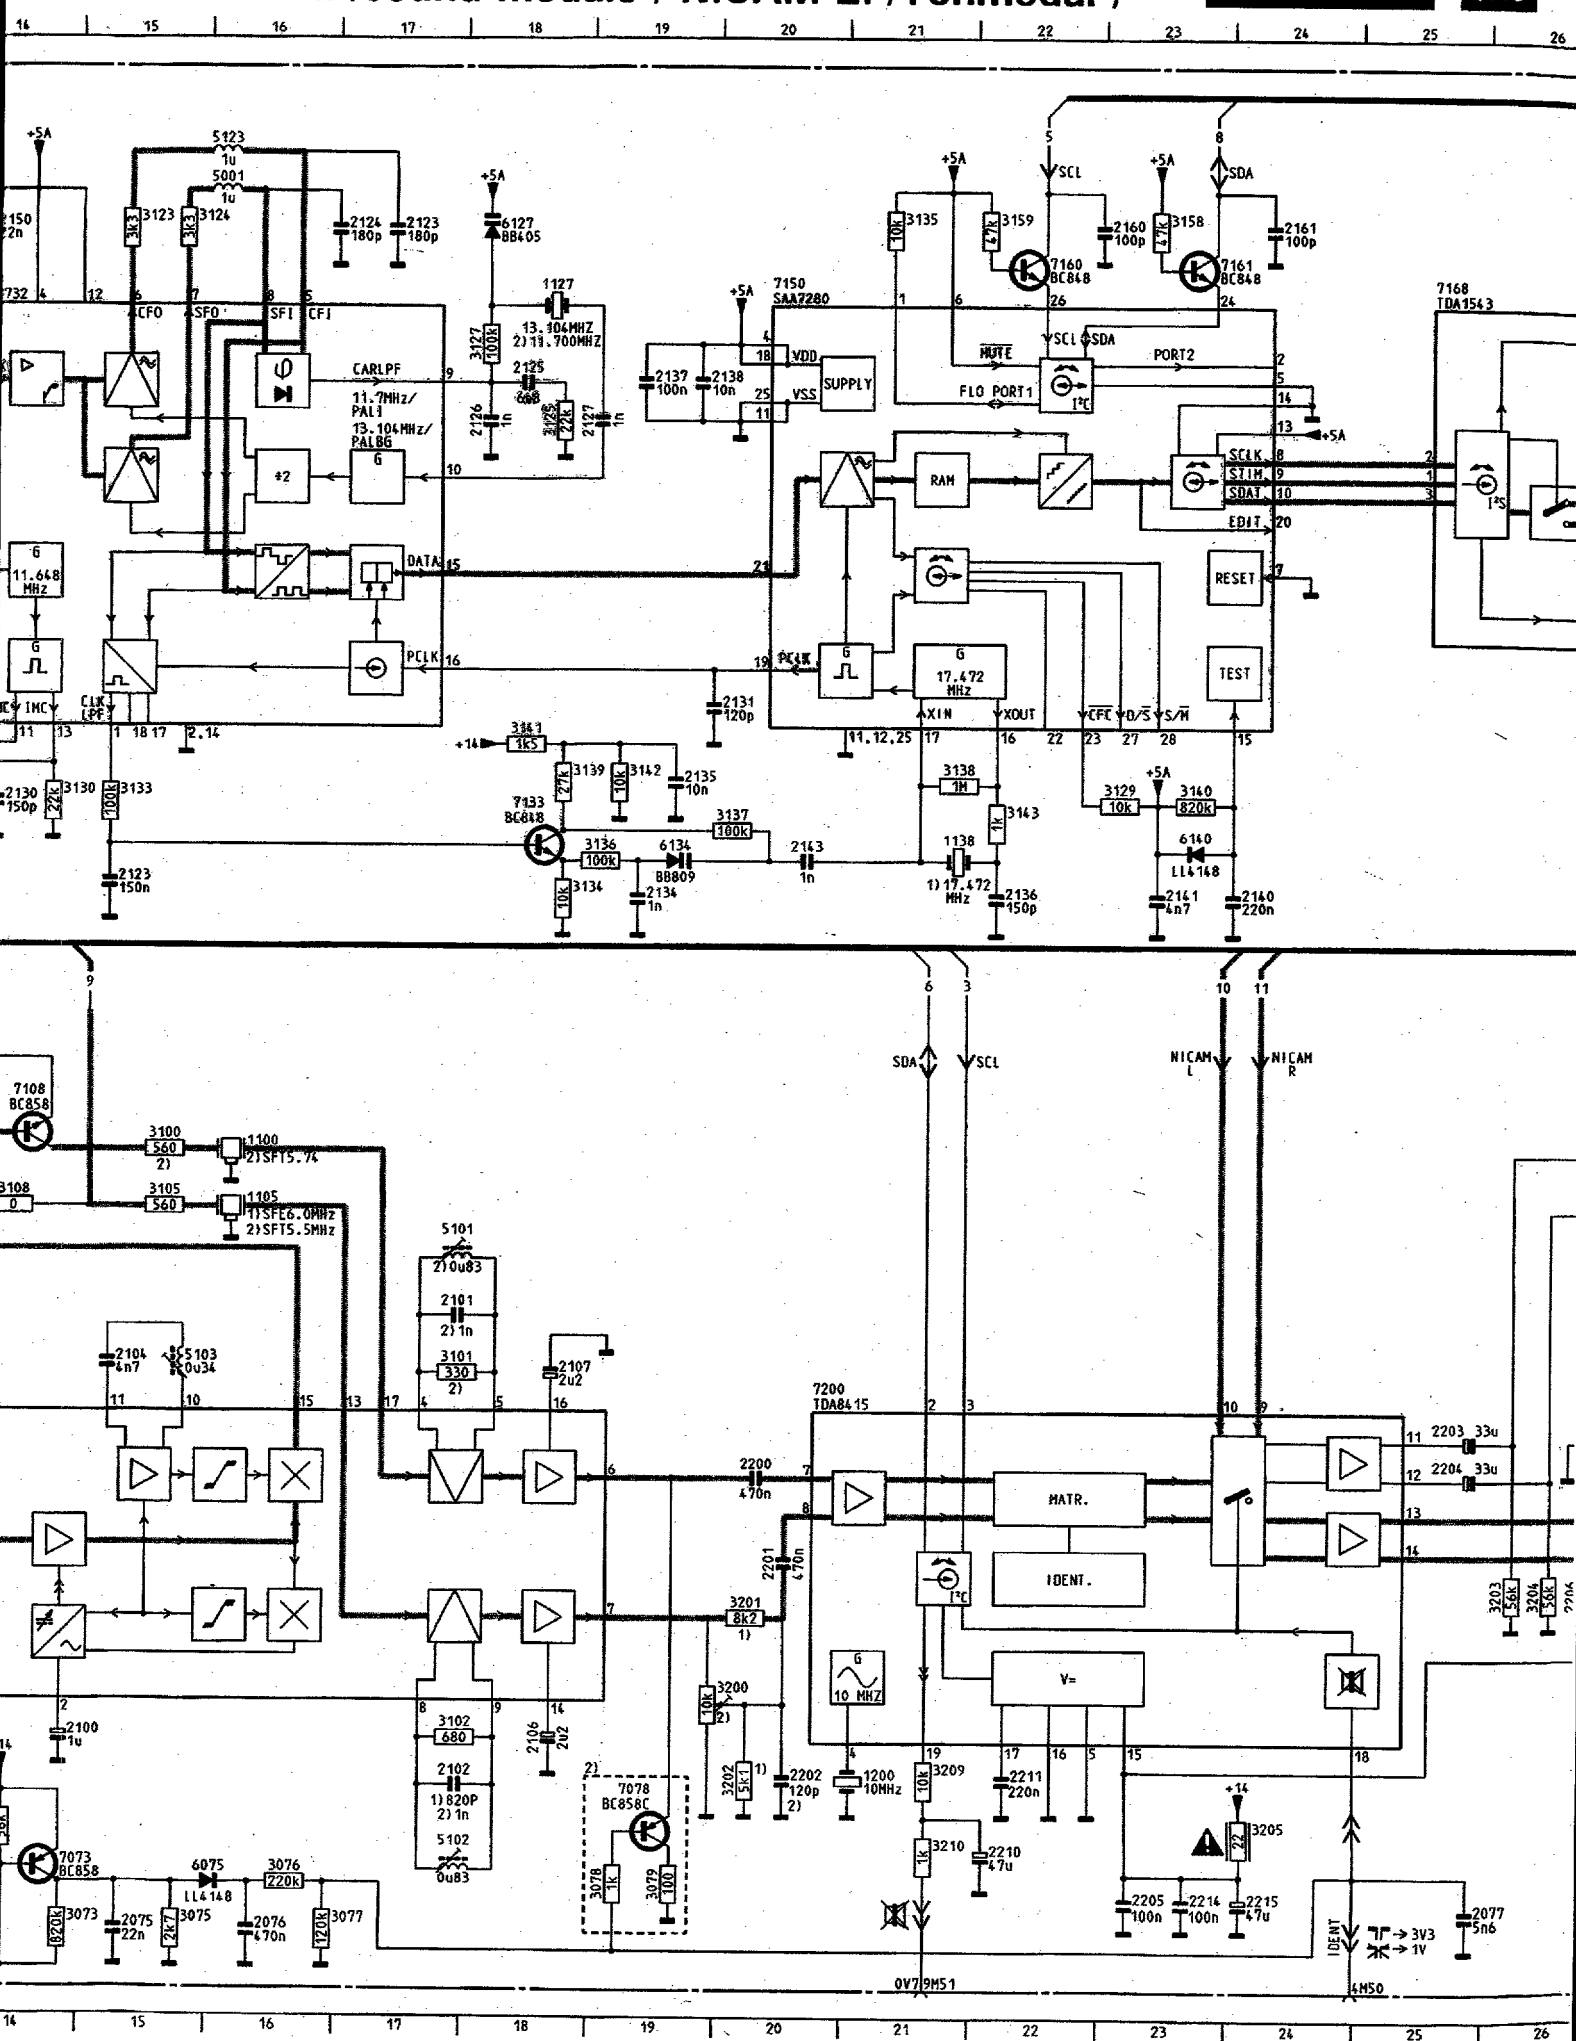
7150 SAA7280
7160 BC848
7161 BC848
7168 TDA1543
7108 BC858
7200 TDA8415
7073 BC858
7078 BC858
7933 BC848
6075 LL4148
6140 LL4148
6134 BB809
6127 BB405
5123 1u
5001 1u
5101 2)0u83
5102 0u83
5103 0u34
1127 13.104MHZ 2)11.700MHZ
1138 1)17.472 MHz
1200 10MHz
CARLPF
11.7MHz/ PAL I
13.104MHz/ PALBG
DATA
PCLK
CLK
CFO
SFO
SFI
CFI
VDD
VSS
SUPPLY
RAM
RESET
TEST
MUTE
FLO PORT1
PORT2
SCLK
STIM
SDAT
EDIT
XIN
XOUT
CFC
D/S
S/W
SDA
SCL
NICAM L
NICAM R
MATR.
IDENT.
V=
IDENT
0V7 9M51
4M50

Module FI/son NICAM

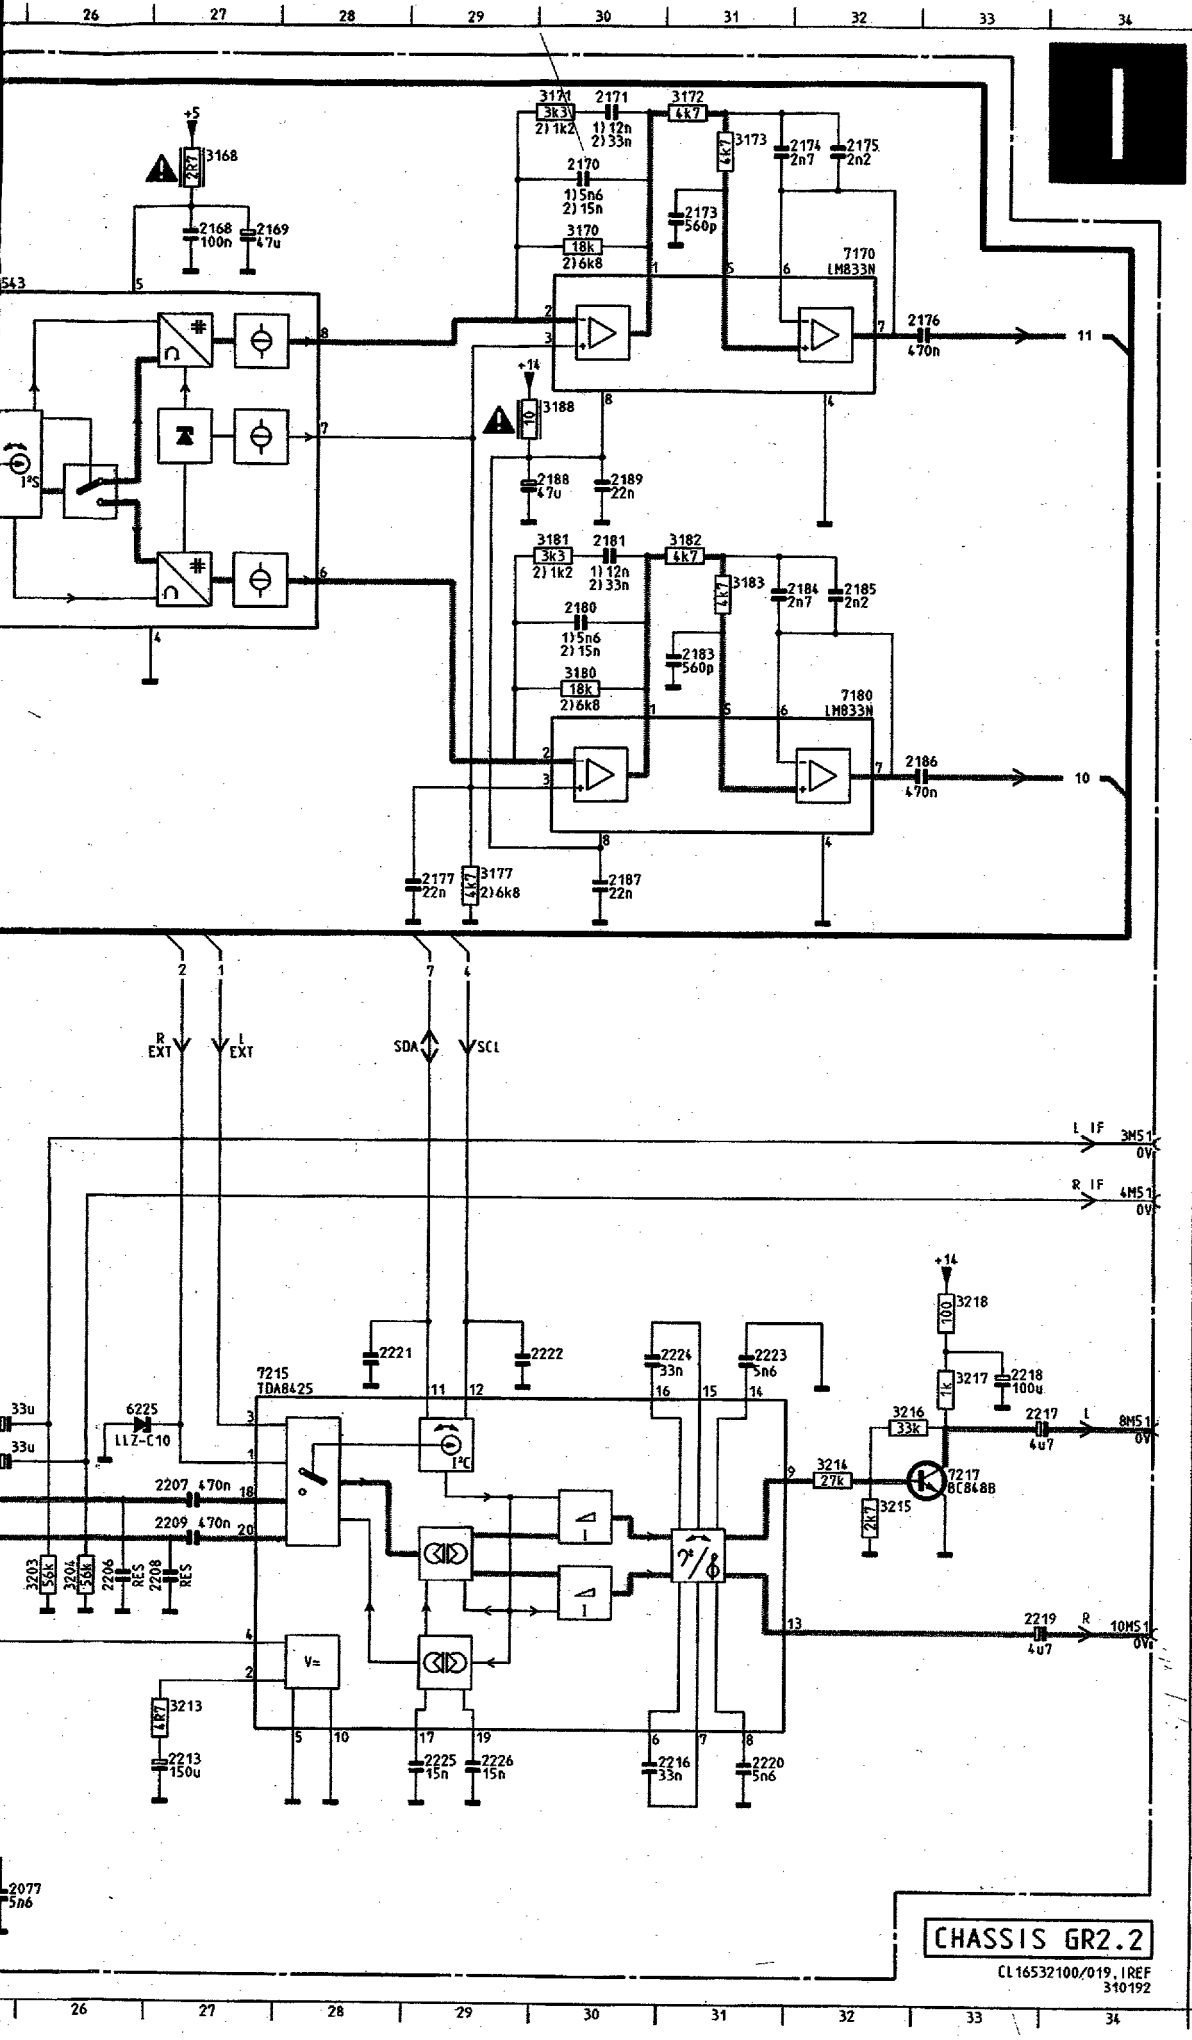

	1010	H 3	3020	M10	7168	B25
	1042	O 8	3021	N 9	7170	B32
	1100	I16	3030	M 3	7180	F32
	1105	I16	3035	J 6	7190	E 5
A	1116	B11	3041	N 6	7191	F 6
	1127	B18	3042	N 8	7200	K20
	1138	G21	3044	K10	7215	K27
	1191	E 5	3047	L11	7217	L33
	1200	N21	3052	N 9		
	2011	N 2	3055	D 6		
	2012	O 4	3056	D 6		
	2013	M 4	3058	N 6		
B	2014	L 4	3071	N13		
	2015	N 3	3072	N12		
	2016	N 4	3073	O14		
	2017	N 9	3074	N14		
	2042	O 7	3075	O15		
	2044	J 5	3076	O16		
	2047	M11	3077	O16		
	2049	J 4	3078	O19		
C	2050	D 7	3079	O19		
	2071	N12	3100	I15		
	2072	O12	3101	K17		
	2073	N13	3102	M17		
	2075	O15	3105	I15		
	2076	O16	3106	J14		
	2077	O25	3107	I14		
D	2100	N14	3108	I14		
	2101	J17	3109	M12		
	2102	N17	3110	H14		
	2104	K15	3116	D11		
	2106	N18	3122	C13		
	2107	K18	3123	B15		
	2108	N13	3124	B15		
	2109	N12	3125	C18		
E	2110	I13	3127	C18		
	2116	C11	3128	F13		
	2119	C 5	3129	F23		
	2122	C13	3130	F14		
	2123	B17	3131	D13		
	2123	G15	3133	F15		
	2124	B17	3134	G18		
	2125	C18	3135	B21		
F	2126	C18	3136	G19		
	2127	C18	3137	F20		
	2128	F13	3138	F21		
	2129	B13	3139	F18		
	2130	F14	3140	F23		
	2131	E20	3141	F18		
	2134	G19	3142	F19		
G	2135	F19	3143	F22		
	2136	G22	3150	F 8		
	2137	C19	3158	B23		
	2138	C19	3159	B22		
	2140	G24	3160	F 2		
	2141	G23	3161	G 2		
	2143	G20	3168	A27		
H	2150	B14	3170	B30		
	2151	B13	3171	A30		
	2160	B23	3172	A31		
	2161	B24	3173	A31		
	2168	B27	3177	G29		
	2169	B27	3180	E30		
	2170	A30	3181	D30		
	2171	A30	3182	D31		
I	2173	B31	3183	E31		
	2174	A31	3188	C30		
	2175	A32	3190	C 5		
	2176	C33	3191	E 7		
	2177	G29	3200	M20		
	2180	E30	3201	L20		
	2181	D30	3202	N20		
J	2183	E31	3203	L26		
	2184	E31	3204	L26		
	2185	E32	3205	N24		
	2186	F33	3206	E 2		
	2187	G30	3208	F 2		
	2188	D29	3209	N21		
	2189	D30	3210	N21		
	2190	F 5	3213	M27		
K	2191	F 6	3214	L32		
	2193	E 7	3215	L32		
	2194	F 4	3216	K32		
	2198	C 6	3217	K33		
	2200	K20	3218	J33		
	2201	L20	5001	A16		
	2202	N20	5010	I 2		
	2203	K25	5035	J 6		
L	2204	K25	5036	O 6		
	2205	O23	5042	N 8		
	2206	L26	5101	J17		
	2207	L27	5102	N17		
	2208	L27	5103	K15		
	2209	L27	5123	A16		
	2210	N22	6070	N13		
M	2211	N22	6071	O13		
	2213	N27	6072	O13		
	2214	O23	6075	O16		
	2215	O24	6127	B18		
	2216	N31	6134	G19		
	2217	K33	6140	G23		
	2218	K33	6190	D 5		
N	2219	M33	6191	F 5		
	2220	N31	6225	K26		
	2221	K28	7000	K 4		
	2222	K29	7000	B14		
	2223	K31	7035	D 7		
	2224	K31	7073	O14		
	2225	N29	7078	N19		
	2226	N29	7100	K13		
	3012	M 2	7106	I13		
O	3013	M 2	7108	I14		
	3014	M 2	7133	F18		
	3015	N 3	7150	B20		
	3016	N 3	7160	B22		
	3019	L10	7161	B23		

NICAM IF/sound module / NICAM ZF/Tonmodul /

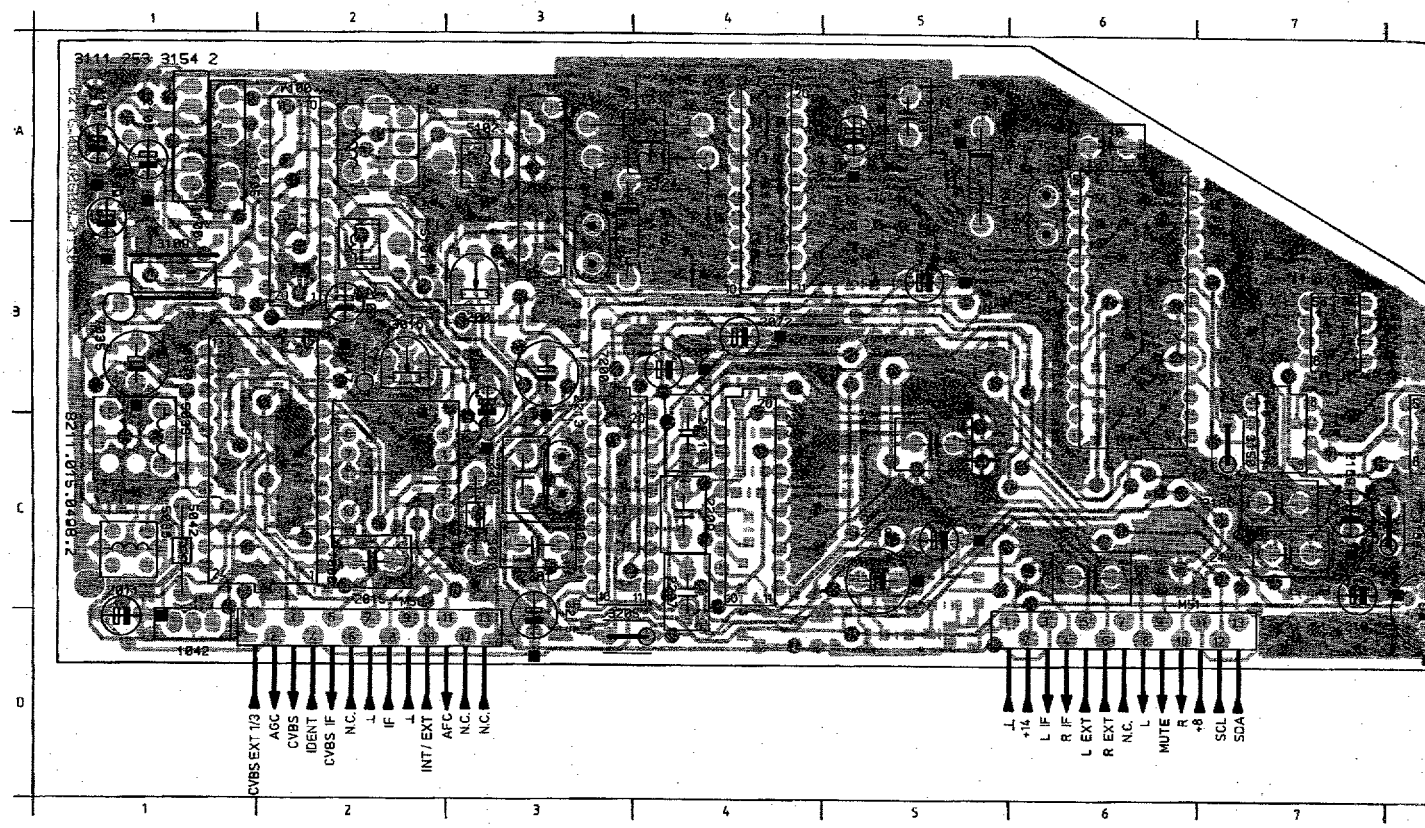

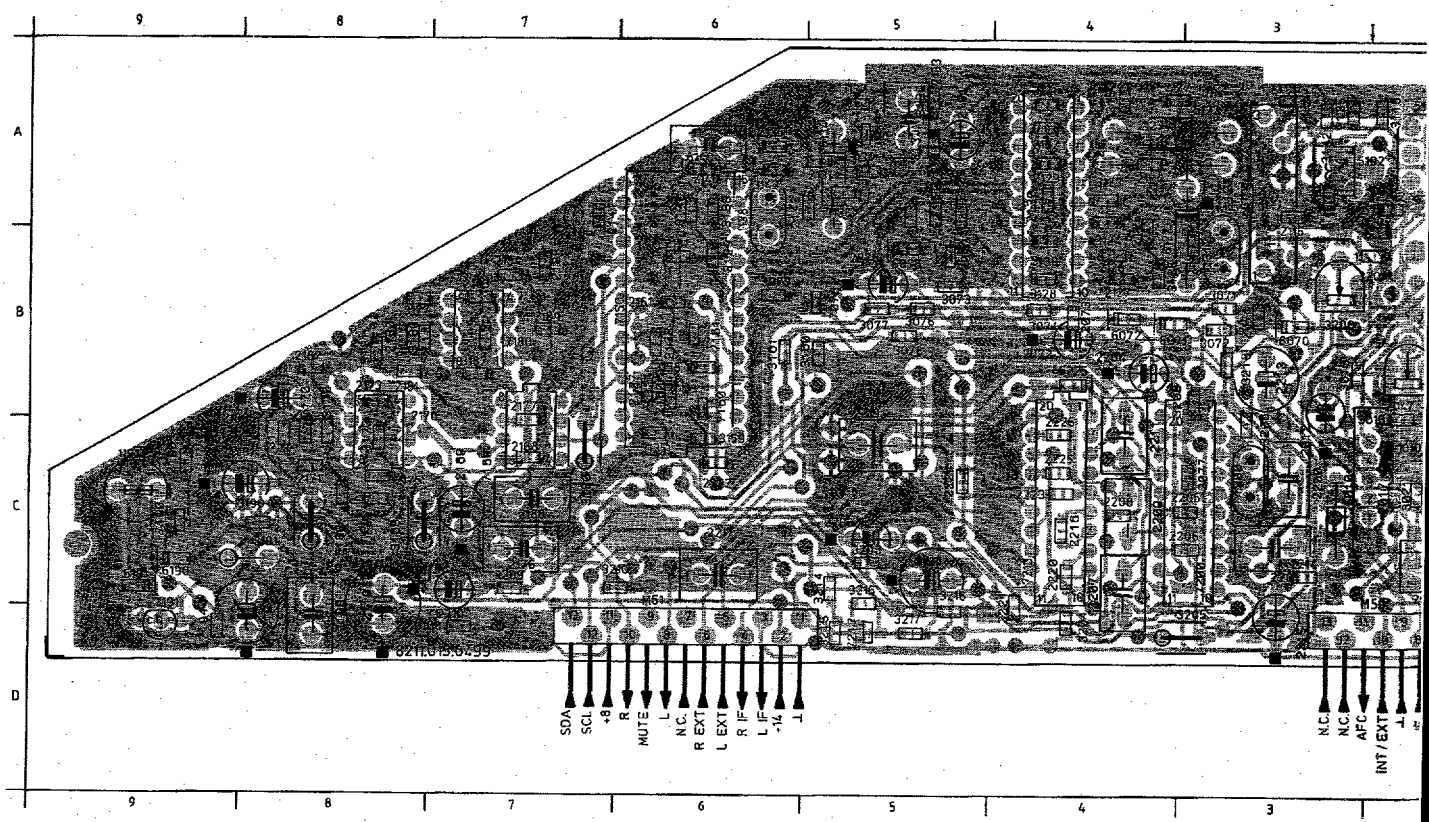

Module FI/son NICAM

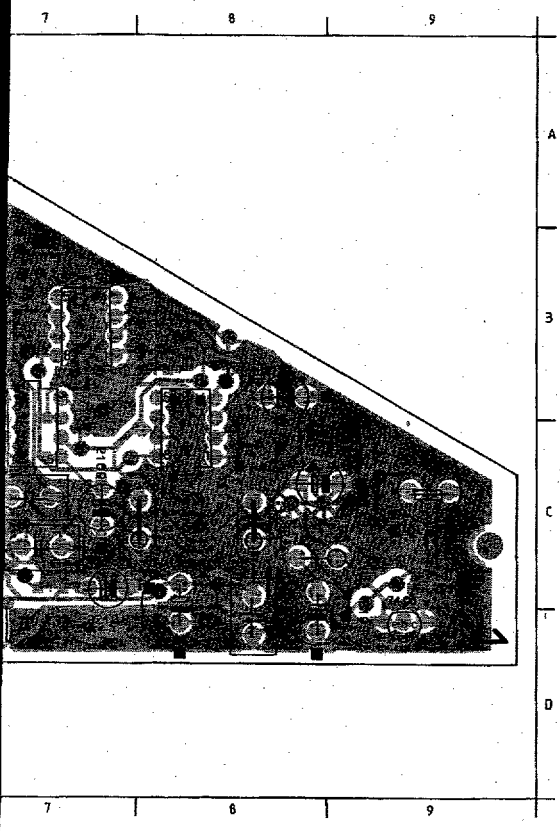

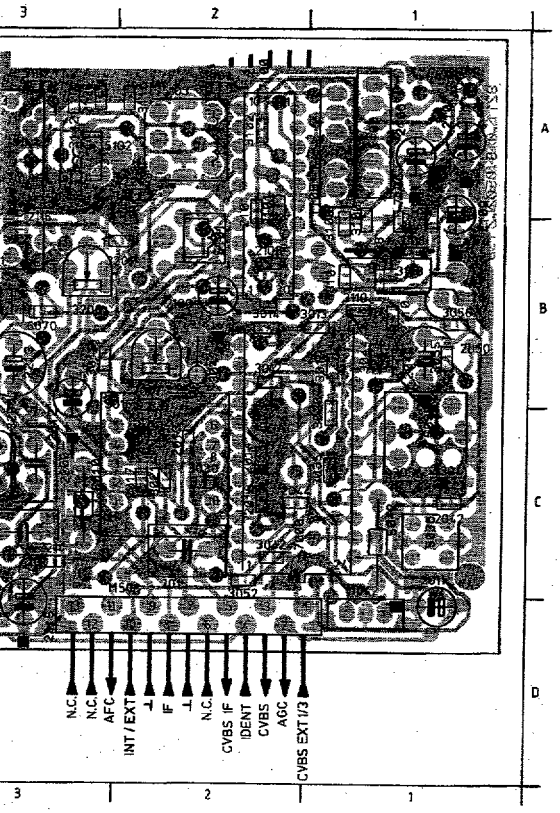

M50 D2	2220 C4	5102 A3
M51 D6	2221 D4	5103 A2
1010 C2	2222 C6	5123 A4
1042 D1	2223 C4	5124 A4
1100 A1	2224 C5	6070 B3
1105 A1	2225 C4	6071 B4
1116 A3	2226 C4	6072 B4
1127 B3	3012 B2	6075 B5
1138 B6	3013 B1	6127 B3
1191 C9	3014 B2	6134 A5
1200 C3	3015 B3	6140 A6
2011 D1	3016 B2	6190 C9
2012 C3	3019 B1	6191 C9
2013 C2	3020 C1	6225 B4
2014 C2	3021 C2	7000 C2
2015 C2	3030 C2	7035 B1
2016 C2	3035 C1	7073 B5
2017 C2	3041 C1	7078 B5
2042 C1	3042 C2	7100 B2
2044 C2	3044 B1	7106 B1
2047 C2	3047 B2	7108 B1
2049 B1	3052 C2	7120 A4
2050 B1	3055 B1	7133 A5
2071 B3	3056 B1	7150 C6
2072 B4	3058 C1	7160 C6
2073 B4	3071 B3	7161 B6
2075 A5	3072 B3	7168 B7
2076 B5	3073 B5	7170 C8
2077 C3	3074 B4	7180 B7
2100 B2	3075 B5	7190 C9
2101 B2	3076 B5	7191 D9
2102 A3	3077 B5	7200 C3
2104 A2	3078 B5	7213 C4
2106 A1	3079 B6	7217 D5
2107 A1	3100 B1	
2108 B2	3101 B2	
2109 B1	3102 A2	
2110 B1	3105 B1	
2116 A3	3106 B1	
2119 C8	3107 B1	
2122 A4	3108 B1	
2123 A4	3109 B1	
2124 A4	3110 B1	
2125 B4	3116 A2	
2126 B4	3122 A3	
2127 B4	3123 A4	
2128 B5	3124 B4	
2129 A4	3125 B4	
2130 A4	3127 B3	
2131 B6	3128 B4	
2132 A4	3129 B6	
2133 A5	3130 B4	
2134 A5	3131 A4	
2135 A3	3133 A5	
2136 A6	3134 A5	
2137 B8	3135 C6	
2138 B6	3136 A5	
2140 A6	3137 A5	
2141 B7	3138 A6	
2143 A5	3139 A5	
2151 A5	3140 A6	
2160 B6	3141 A3	
2161 B6	3142 A3	
2168 C7	3143 A6	
2169 C7	3150 C7	
2170 C8	3158 B6	
2171 C8	3159 C6	
2173 B8	3160 B5	
2174 C8	3161 B6	
2175 C8	3168 C8	
2176 C7	3170 C8	
2177 C7	3171 C8	
2180 B8	3172 C8	
2181 B8	3173 C8	
2183 B7	3177 B8	
2184 B7	3180 B8	
2185 B7	3181 B8	
2186 C7	3182 B7	
2187 B8	3183 B7	
2188 B8	3188 C8	
2189 B7	3190 C8	
2190 C9	3191 C8	
2191 C8	3200 B3	
2193 D8	3201 B2	
2194 D9	3202 B2	
2198 D8	3203 C5	
2200 C3	3204 D4	
2201 C3	3205 D3	
2202 A2	3206 C3	
2203 C5	3208 B3	
2204 B4	3209 C7	
2205 C3	3210 C6	
2206 C3	3213 B3	
2207 C4	3214 C5	
2208 C4	3215 D5	
2209 C4	3216 D5	
2210 C7	3217 D5	
2211 C4	3218 D5	
2213 B3	4000 D7	
2214 C3	4199 B9	
2215 D3	5010 C3	
2216 C4	5035 C1	
2217 C6	5036 C1	
2218 C5	5042 C1	
2219 C5	5101 B2	

PIP module / PIP-Modul / Module PIP

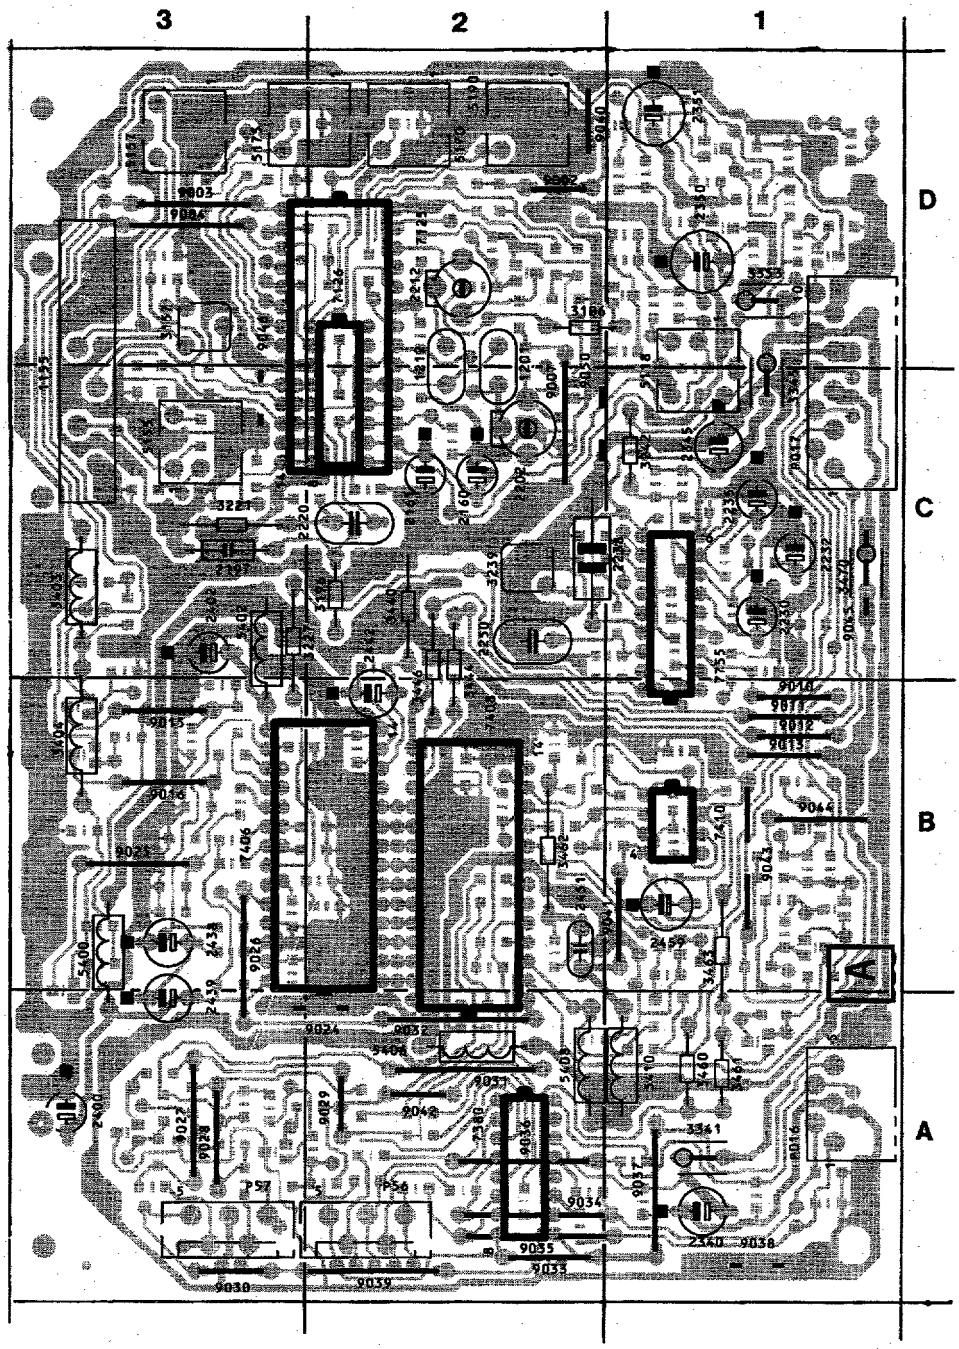

1155 C3 1201 D2 1212 D2 2103 D1 2105 D1 2118 D1 2119 D1 2120 D1 2125 C3 2155 C3 2158 D3 2160 C2 2161 C2 2162 C3 2163 C3 2171 D2 2172 D2 2176 D3 2177 D3 2180 D2 2181 D3 2185 C2 2187 D2 2189 D2 2196 C2 2197 C3 2201 D2 2202 C2 2211 D2 2212 D2 2220 C2 2222 C2 2227 B2 2230 C1 2232 C1 2234 C1 2235 C1 2238 C2 2239 C1 2250 C2 2251 C1 2255 C1 2260 C1 2270 C2 2330 B1 2333 B1 2340 A1 2345 C1 2350 D1 2351 D1 2380 A2 2381 A2 2382 A2 2383 A2 2384 A2 2385 A2 2390 A1 2391 A3 2395 A3 2397 A3 2399 C1 2400 A3 2402 C3

2404 B3 2405 B3 2409 B3 2410 B3 2413 C3 2414 B3 2415 B3 2430 B3 2432 B3 2434 B2 2438 B3 2439 A3 2440 B3 2441 B3 2442 B2 2444 C2 2446 B2 2448 A2 2449 B1 2450 B2 2451 B2 2454 B1 2455 B2 2459 B1 2466 B2 3103 D1 3104 D1 3105 D1 3106 D2 3107 D2 3108 D2 3155 C3 3156 C3 3157 D3 3158 D3 3170 D2 3175 D2 3195 C2 3196 C2 3200 D2 3201 D2 3202 D2 3211 D2 3212 D2 3214 C2 3220 C2 3221 C3 3222 D2 3227 C3 3228 B2 3231 C1 3232 C1 3233 D1 3234 D1 3235 C1 3236 D1 3237 D1 3238 C2 3239 C2 3240 C1 3241 D1 3242 C1 3250 C1

3265 C1 3270 C1 3275 C1 3276 C1 3330 B1 3331 A1 3332 A1 3333 B1 3334 B1 3335 B1 3336 B1 3337 B1 3338 A1 3339 B1 3340 B1 3341 A1 3345 C1 3353 D1 3354 D1 3380 A3 3381 A3 3382 A3 3383 A3 3384 A3 3385 A3 3386 A2 3387 A3 3388 A2 3390 A1 3391 A1 3394 A2 3395 A1 3398 A2 3399 A1 3404 C3 3405 B3 3410 B3 3411 B3 3412 B3 3413 B3 3414 B3 3416 B3 3434 B3 3435 B3 3436 B2 3437 B2 3438 B3 3440 C2 3441 C2 3442 B2 3444 C2 3446 C2 3448 B2 3450 A2 3452 A2 3454 B2 3460 A1 3461 A1 3462 B2 3463 B1 3464 B1 3465 A2 3470 C1

3997 D1 4001 D2 4002 C3 4003 B2 4004 A1 4005 C2 4006 D1 4007 D2 4010 B1 4011 B2 4012 B2 4047 A2 4048 A2 4049 A2 4100 D1 4200 D1 4201 D1 4401 B2 4402 B2 4403 B2 4404 B1 4406 A1 4407 B1 4410 B1 4411 B1 4415 C3 5118 D1 5155 C3 5157 D3 5170 D2 5175 D2 5190 D2 5400 B3 5402 C3 5403 C3 5404 B3 5406 A2 5408 A2 5410 A1 6300 B2 7103 D1 7105 D1 7125 D3 7126 D2 7200 C2 7210 D2 7233 D1 7234 D1 7330 B1 7333 B1 7335 B1 7337 B1 7338 A1 7350 D1 7380 A2 7381 A3 7385 A3 7387 A3 7400 B3 7402 B3 7404 B3 7406 B2 7408 A2

7410
7755
9002
9003
9004
9007
9010
9011
9012
9013
9015
9016
9024
9025
9026
9027
9028
9029
9030
9031
9032
9033
9034
9035
9036
9037
9038
9039
9040
9041
9042
9043
9044
9045
9046
9050
P016
P017
P56
P57

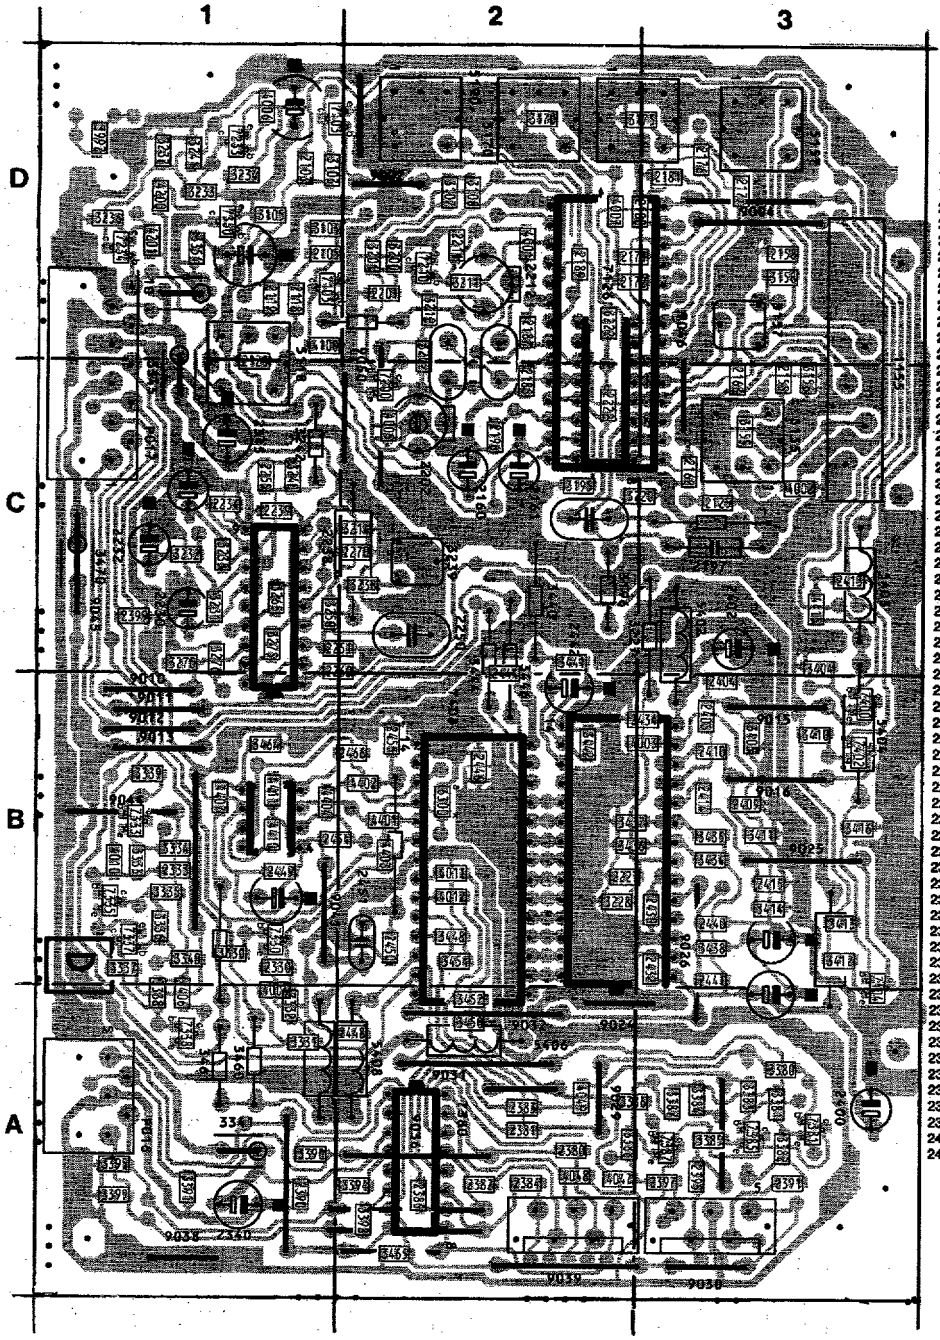

1155 C3	2404 B3	3265 C1	3997 D1	7410 B1
1201 D2	2405 B3	3270 C1	4001 D2	7755 B1
1212 D2	2409 B3	3275 C1	4002 C3	9002 D2
2103 D1	2410 B3	3276 C1	4003 B2	9003 D3
2105 D1	2413 C3	3330 B1	4004 A1	9004 D3
2118 D1	2414 B3	3331 A1	4005 C2	9007 C2
2119 D1	2415 B3	3332 A1	4006 D1	9010 B1
2120 D1	2430 B3	3333 B1	4007 D2	9011 B1
2125 C3	2432 B3	3334 B1	4010 B1	9012 B1
2155 C3	2434 B2	3335 B1	4011 B2	9013 B1
2158 D3	2438 B3	3336 B1	4012 B2	9015 B3
2160 C2	2439 A3	3337 B1	4047 A2	9016 B3
2161 C2	2440 B3	3338 A1	4048 A2	9024 A2
2162 C3	2441 B3	3339 B1	4049 A2	9025 B3
2163 C3	2442 B2	3340 B1	4100 D1	9026 B3
2171 D2	2444 C2	3341 A1	4200 D1	9027 A3
2172 D2	2446 B2	3345 C1	4201 D1	9028 A3
2176 D3	2448 A2	3353 D1	4401 B2	9029 A2
2177 D3	2449 B1	3354 D1	4402 B2	9030 A3
2180 D2	2450 B2	3380 A3	4403 B2	9031 A2
2181 D3	2451 B2	3381 A3	4404 B1	9032 A2
2185 C2	2454 B1	3382 A3	4406 A1	9033 A2
2187 D2	2455 B2	3383 A3	4407 B1	9034 A2
2189 D2	2459 B1	3384 A3	4410 B1	9035 A2
2196 C2	2466 B2	3385 A3	4411 B1	9036 A2
2197 C3	3103 D1	3386 A2	4415 C3	9037 A1
2201 D2	3104 D1	3387 A3	5118 D1	9038 A1
2202 C2	3105 D1	3388 A2	5155 C3	9039 A2
2211 D2	3106 D2	3390 A1	5157 D3	9040 D2
2212 D2	3107 D2	3391 A1	5170 D2	9041 B1
2220 C2	3108 D2	3394 A2	5175 D2	9042 A2
2222 C2	3155 C3	3395 A1	5190 D2	9043 B1
2227 B2	3156 C3	3398 A2	5400 B3	9044 B1
2230 C1	3157 D3	3399 A1	5402 C3	9045 C1
2232 C1	3158 D3	3404 C3	5403 C3	9046 C3
2234 C1	3170 D2	3405 B3	5404 B3	9050 C2
2235 C1	3175 D2	3410 B3	5406 A2	P016 A1
2238 C2	3195 C2	3411 B3	5408 A2	P017 C1
2239 C1	3196 C2	3412 B3	5410 A1	P56 A2
2250 C2	3200 D2	3413 B3	6300 B2	P57 A3
2251 C1	3201 D2	3414 B3	7103 D1	
2255 C1	3202 D2	3416 B3	7105 D1	
2260 C1	3211 D2	3434 B3	7125 D3	
2270 C2	3212 D2	3435 B3	7126 D2	
2330 B1	3214 C2	3436 B2	7200 C2	
2333 B1	3220 C2	3437 B2	7210 D2	
2340 A1	3221 C3	3438 B3	7233 D1	
2345 C1	3222 D2	3440 C2	7234 D1	
2350 D1	3227 C3	3441 C2	7330 B1	
2351 D1	3228 B2	3442 B2	7333 B1	
2380 A2	3231 C1	3444 C2	7335 B1	
2381 A2	3232 C1	3446 C2	7337 B1	
2382 A2	3233 D1	3448 B2	7338 A1	
2383 A2	3234 D1	3450 A2	7350 D1	
2384 A2	3235 C1	3452 A2	7380 A2	
2385 A2	3236 D1	3454 B2	7381 A3	
2390 A1	3237 D1	3460 A1	7385 A3	
2391 A3	3238 C2	3461 A1	7387 A3	
2395 A3	3239 C2	3462 B2	7400 B3	
2397 A3	3240 C1	3463 B1	7402 B3	
2399 C1	3241 D1	3464 B1	7404 B3	
2400 A3	3242 C1	3465 A2	7406 B2	
2402 C3	3250 C1	3470 C1	7408 A2	

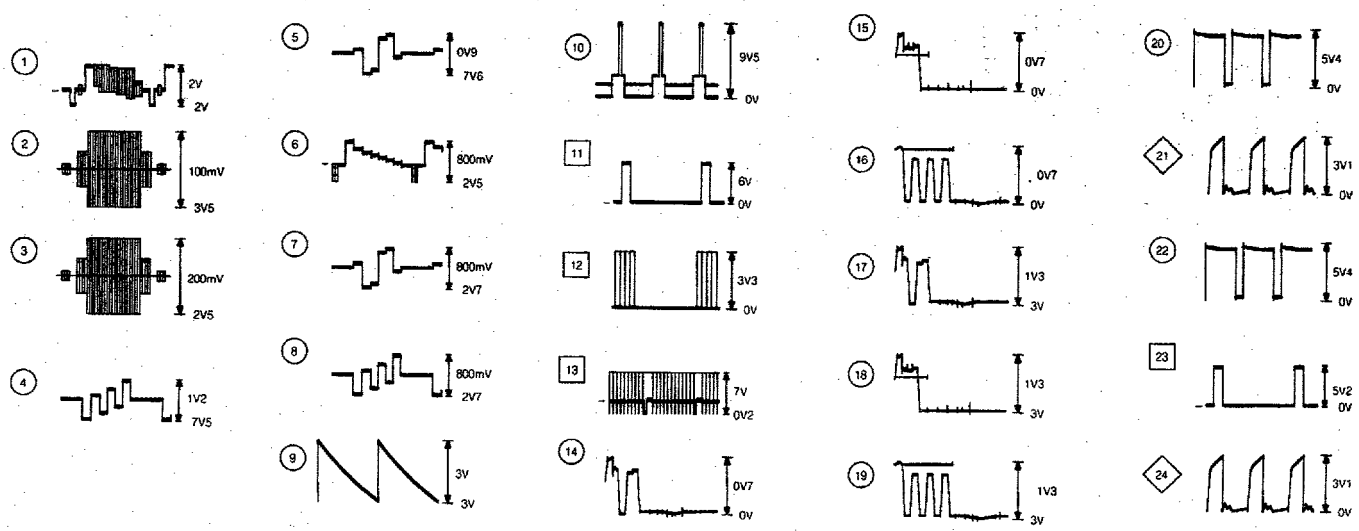

PIP module / PIP-Modul / Module PIP

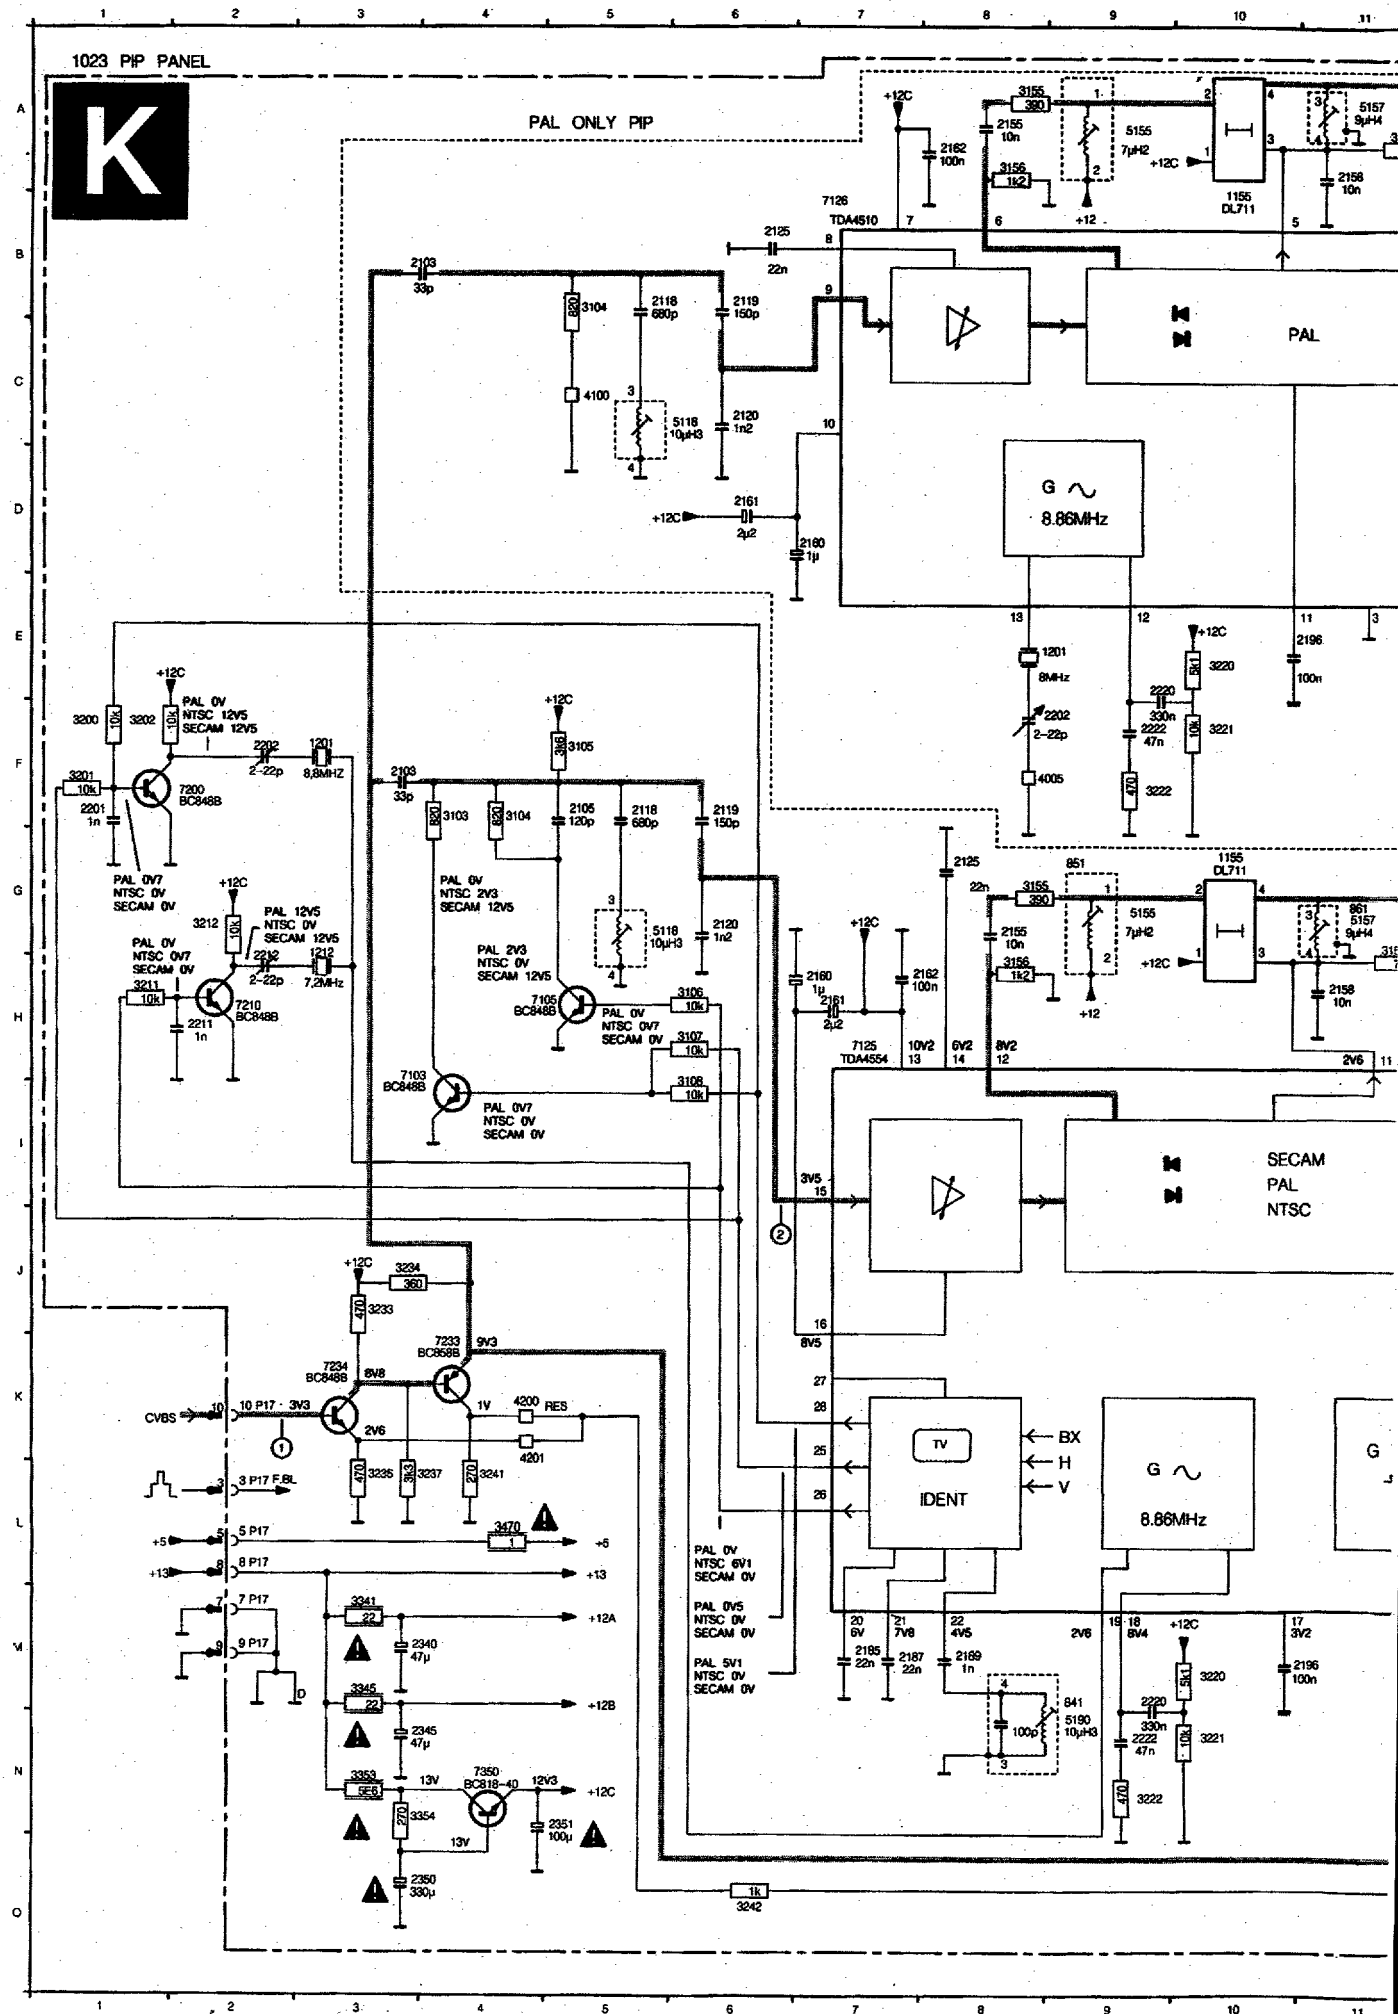

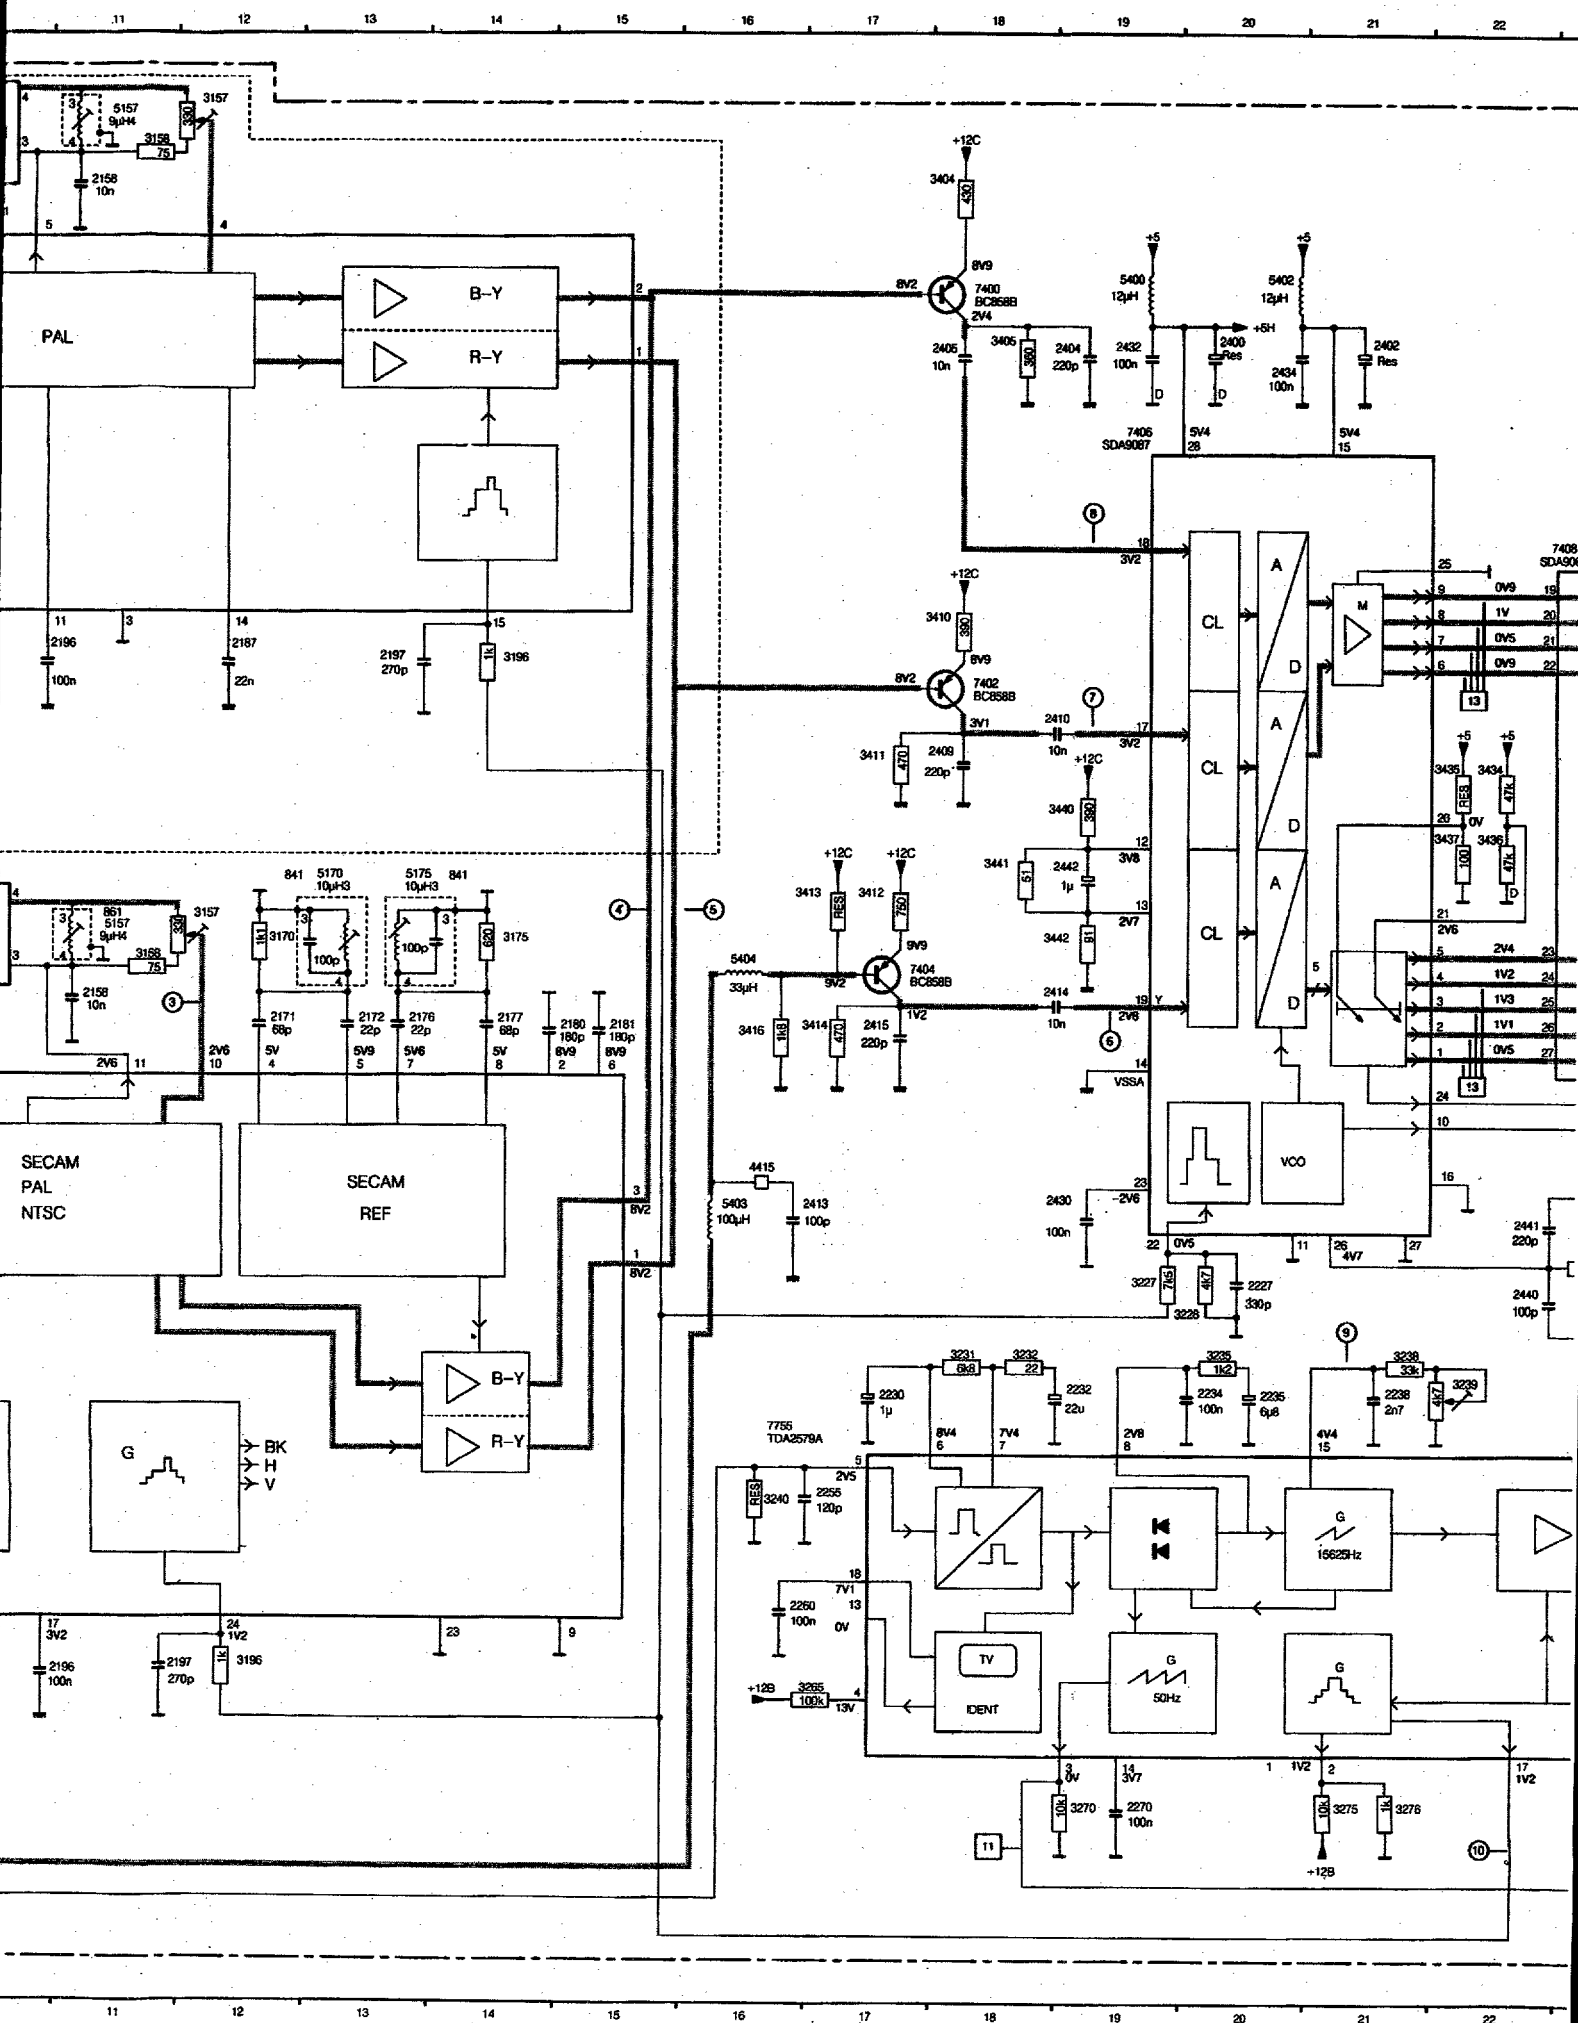
PAL
B-Y
R-Y
SECAM
PAL
NTSC
SECAM
REF
B-Y
R-Y
G
BK
H
V
CL
CL
CL
A
D
M
VCO
TV
IDENT
G
15625Hz
G
50Hz
G
+12C
+5
+5H
+12B
VSSA
-2V6
7406
SDA9087
7755
TDA2579A

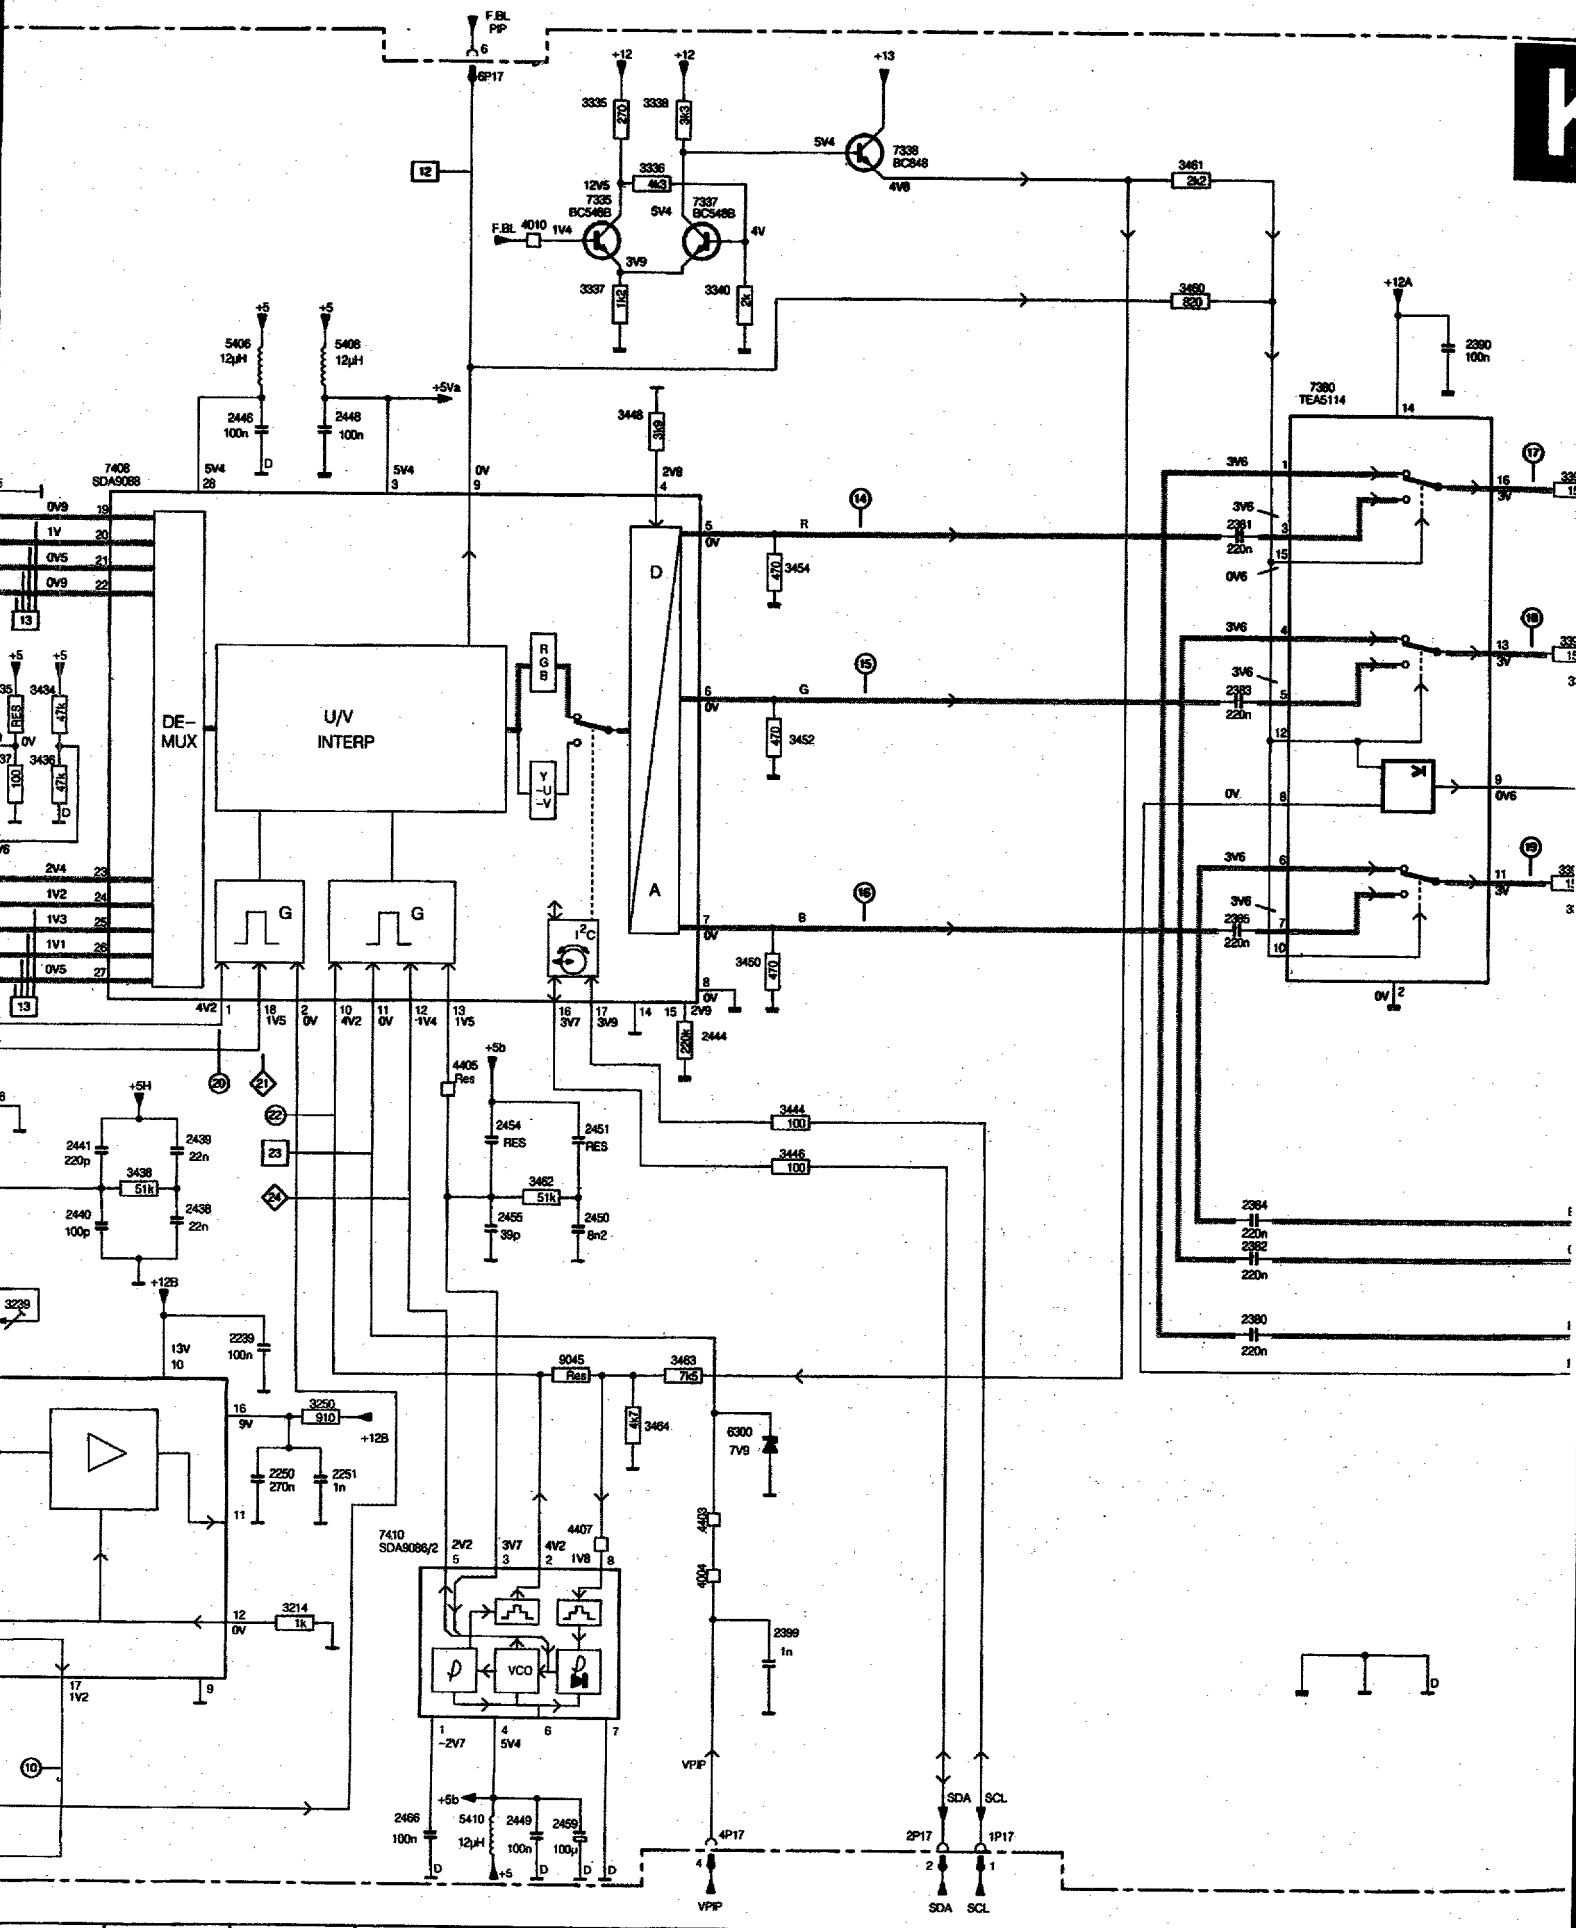
DE-MUX
U/V INTERP
D
A
VCO
7408 SDA9088
7410 SDA9086/2
7380 TEA5114
F.BL PIP
+5Va
+12A
+12B
+5H
+5b
VPIP
SDA
SCL

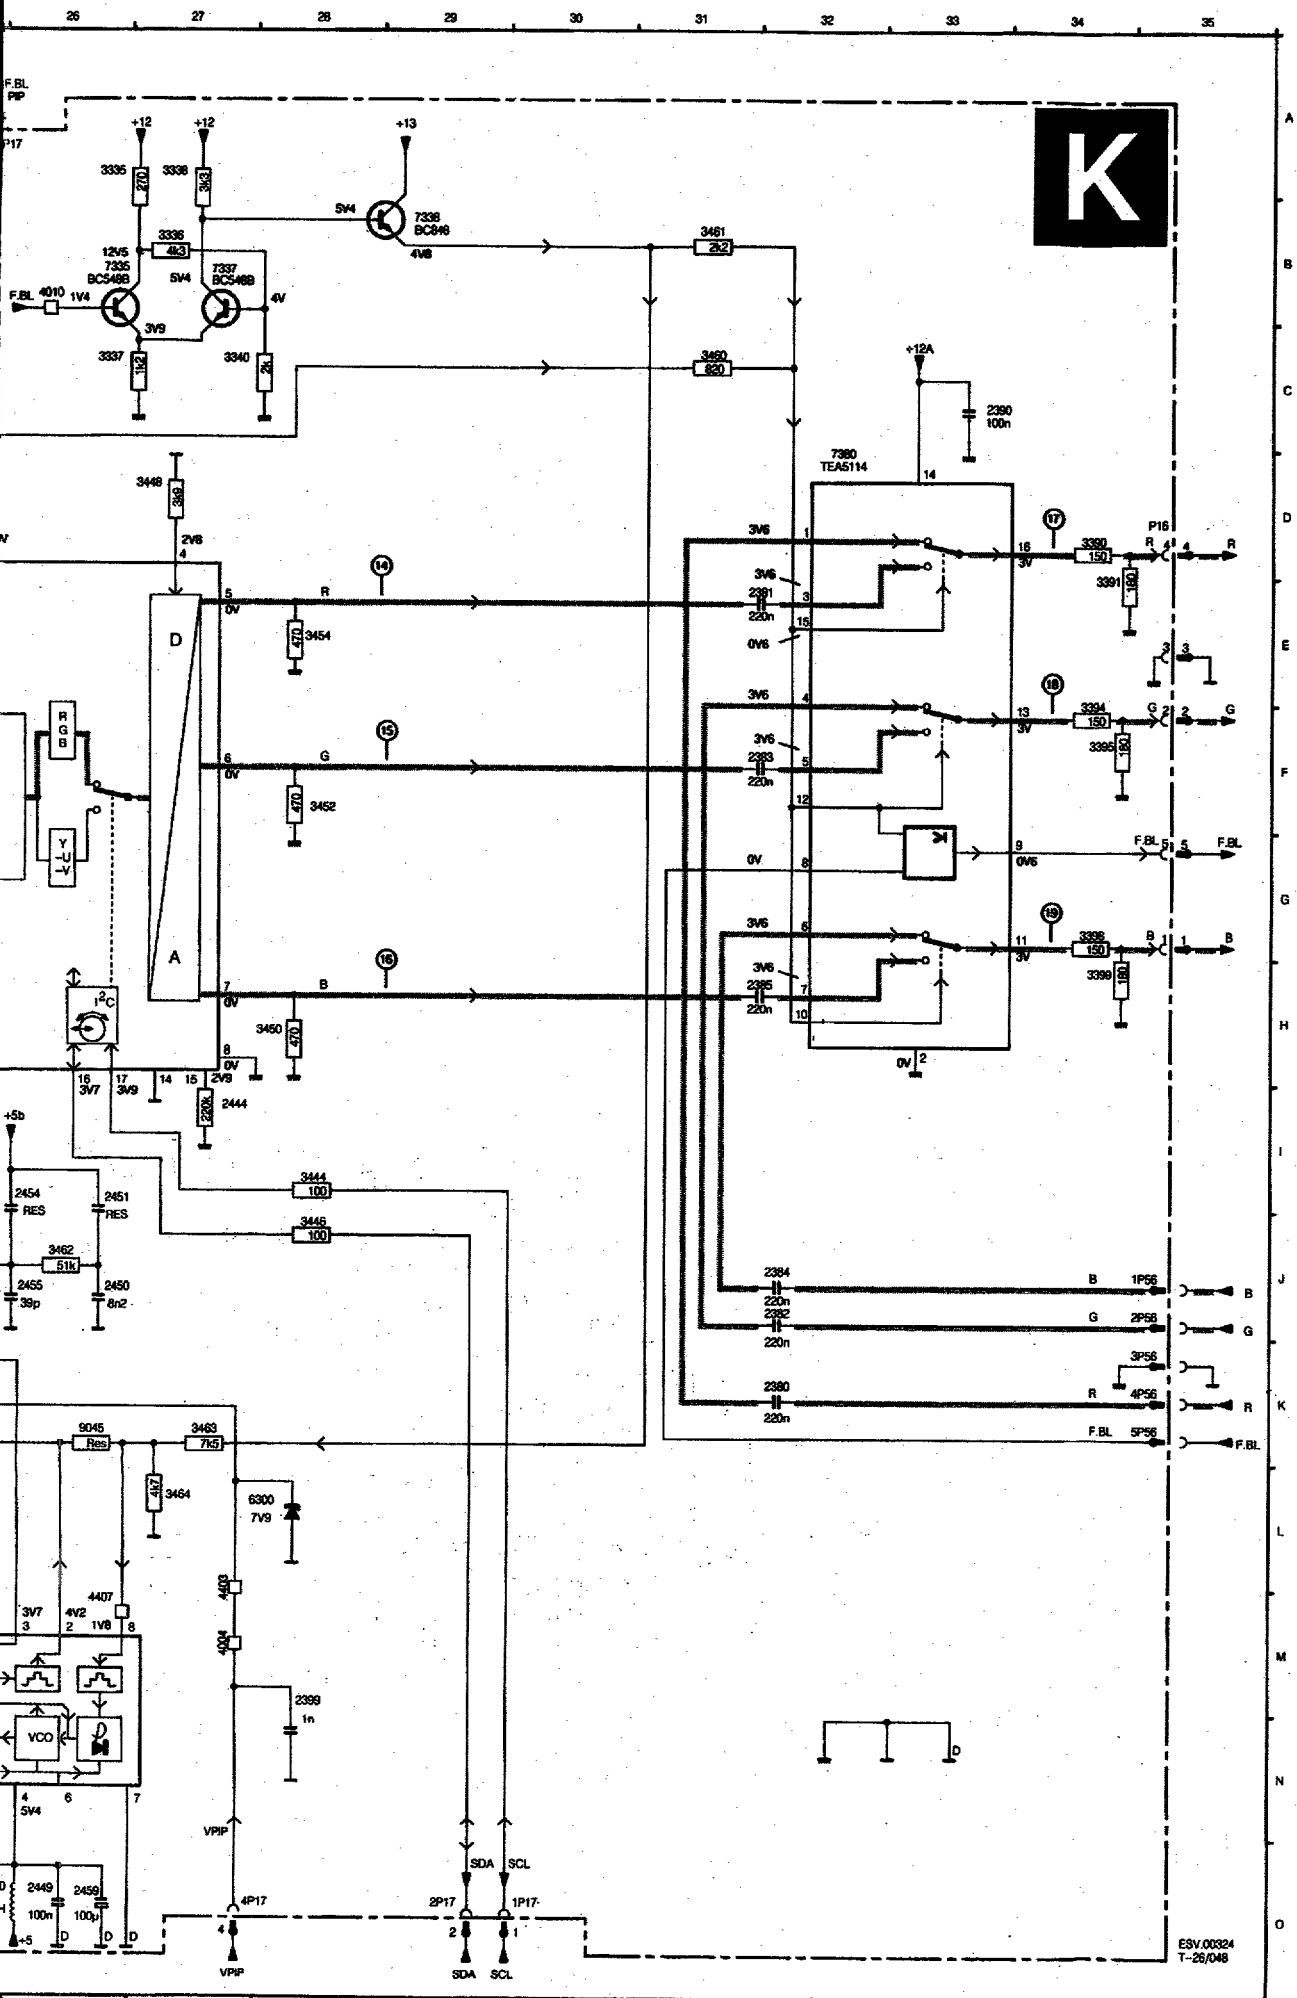

1155	B10	3275	N21
1155	G10	3276	N21
1201	E9	3335	A26
1201	F3	3336	B27
1212	H3	3337	C26
2103	B4	3338	A27
2103	F3	3340	C27
2105	F5	3341	M3
2118	B5	3345	M3
2118	F5	3353	N3
2119	B6	3354	N3
2119	F6	3390	D34
2120	C6	3391	E34
2120	G6	3394	F34
2125	B6	3395	F34
2125	G6	3398	G34
2155	A8	3399	H34
2155	G8	3404	A18
2158	A11	3405	C18
2158	H11	3410	E18
2160	D7	3411	F17
2160	H7	3412	G17
2161	D6	3413	G17
2161	H7	3414	H17
2162	A8	3416	H16
2162	H6	3434	F22
2171	H12	3435	F22
2172	H13	3436	G22
2176	H13	3437	G22
2177	H14	3438	J23
2180	H15	3440	F19
2181	H15	3441	G18
2185	M7	3442	G19
2187	E12	3444	I28
2187	M7	3446	J28
2189	M8	3448	D27
2196	E11	3450	H28
2196	M11	3452	F28
2197	E13	3454	E28
2197	M12	3460	C31
2201	F1	3461	B31
2202	F2	3462	J26
2202	F9	3463	K27
2211	H2	3464	L27
2212	H2	3470	L4
2220	E9	4004	M27
2220	M9	4005	F9
2222	F9	4010	B26
2222	N9	4100	C5
2227	J20	4200	K4
2230	K17	4201	K4
2232	K19	4403	M27
2234	K20	4405	I25
2235	K20	4407	M26
2238	K21	4415	I16
2239	K24	5118	C6
2250	L24	5118	G5
2251	L24	5155	A9
2255	L17	5155	G9
2260	M16	5157	A11
2270	N19	5157	G11
2340	M3	5170	G13
2345	N3	5175	G13
2350	C3	5190	N9
2351	N5	5400	B19
2380	K32	5402	B20
2381	E32	5403	I16
2382	J32	5404	G16
2383	F32	5406	C24
2384	J32	5408	C24
2385	H32	5410	C25
2390	C33	6300	L28
2399	M28	7103	H4
2400	C20	7105	H5
2402	C21	7125	H7
2404	C19	7126	B7
2405	C18	7200	F2
2409	F18	7210	H2
2410	F19	7233	K4
2413	I17	7234	K3
2414	H19	7335	B26
2415	H17	7337	B27
2430	I19	7338	B29
2432	C19	7350	N4
2434	C20	7380	D32
2438	J23	7400	B18
2439	J23	7402	E18
2440	J22	7404	H17
2441	J22	7406	C19
2442	G19	7408	D23
2444	I27	7410	M25
2446	D24	7755	K16
2448	D24	9045	K26
2449	Q26		
2450	J26		
2451	I26		
2454	I26		
2455	J26		
2459	Q26		
2466	Q25		
3103	F4		
3104	B5		
3104	F4		
3105	F5		
3106	H6		
3107	H6		
3108	I6		
3155	A8		
3155	G8		
3156	A8		
3156	H8		
3157	A12		
3157	G12		
3158	A11		
3158	G11		
3170	G12		
3175	G14		
3196	E14		
3196	M12		
3200	F1		
3201	F1		
3202	F1		
3211	H1		
3212	G2		
3214	M24		
3220	E10		
3220	M10		
3221	F10		
3221	N10		
3222	F9		
3222	N9		
3227	J19		
3228	J20		
3231	K18		
3232	K18		
3233	J3		
3234	J3		
3235	K20		
3236	L3		
3237	L3		
3238	K21		
3239	K22		
3240	L16		
3241	L4		
3242	Q6		
3250	L24		
3265	M17		
3270	N19		

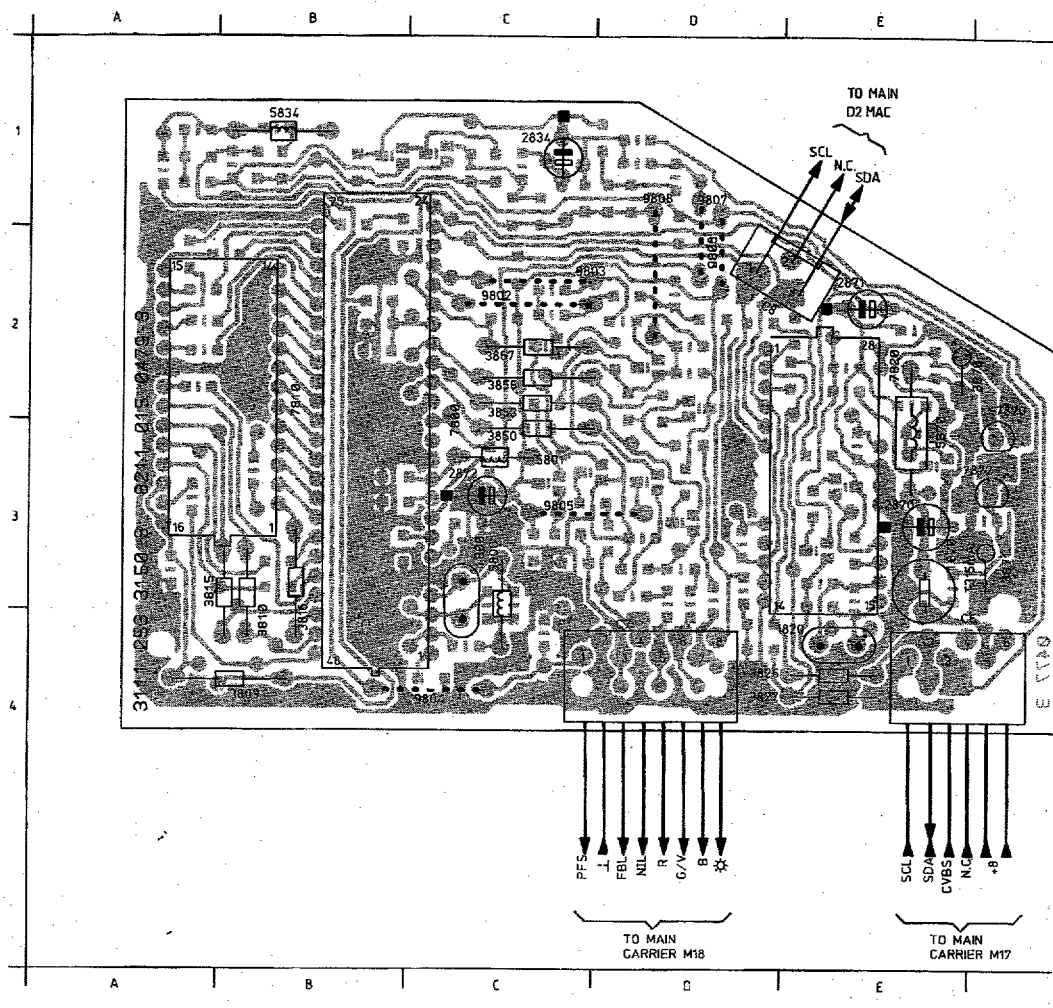
TO MAIN D2 MAC
SCL
N.C.
SDA
PFS
T
FBL
NIL
R
G/Y
B
SCL
SDA
CVBS
N.C.
+8
TO MAIN CARRIER M18
TO MAIN CARRIER M17

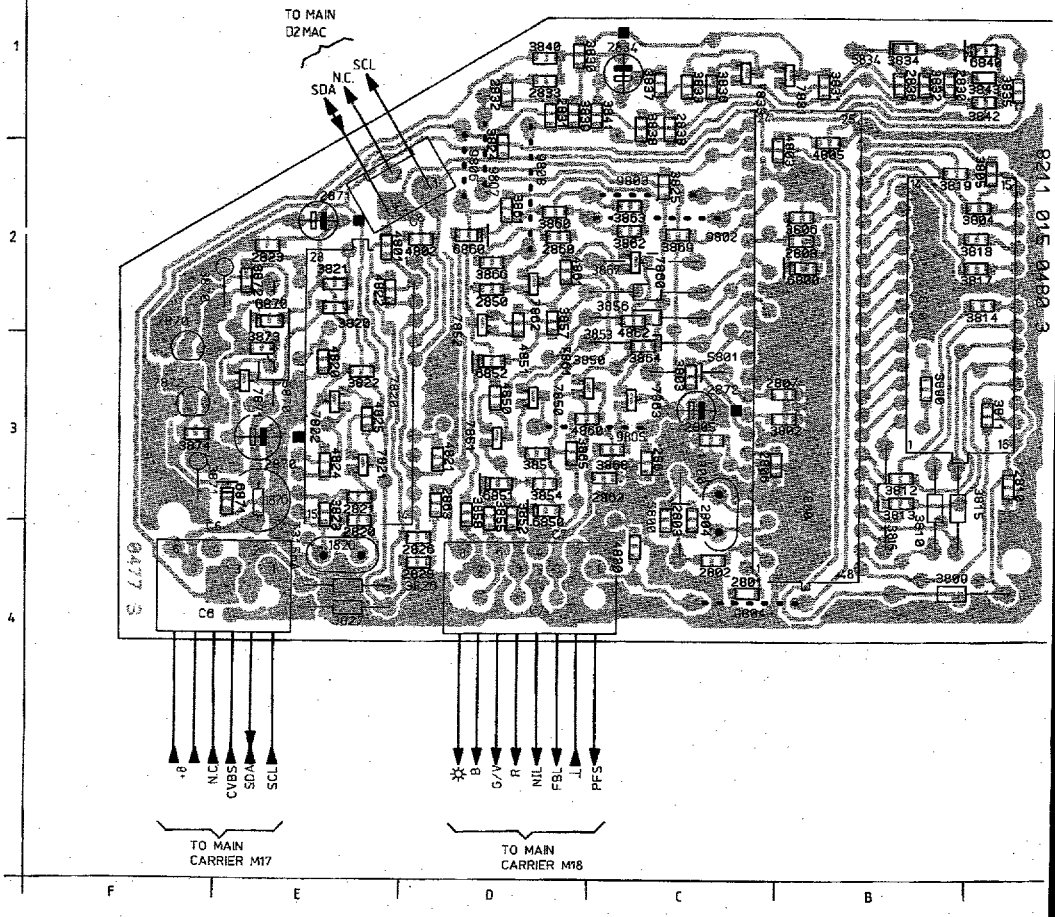
TO MAIN D2 MAC
SCL
N.C.
SDA
+8
N.C.
CVBS
SDA
SCL
B
G/Y
R
NIL
FBL
T
PFS
TO MAIN CARRIER M17
TO MAIN CARRIER M18

Teletext / Videotext / Teletexte

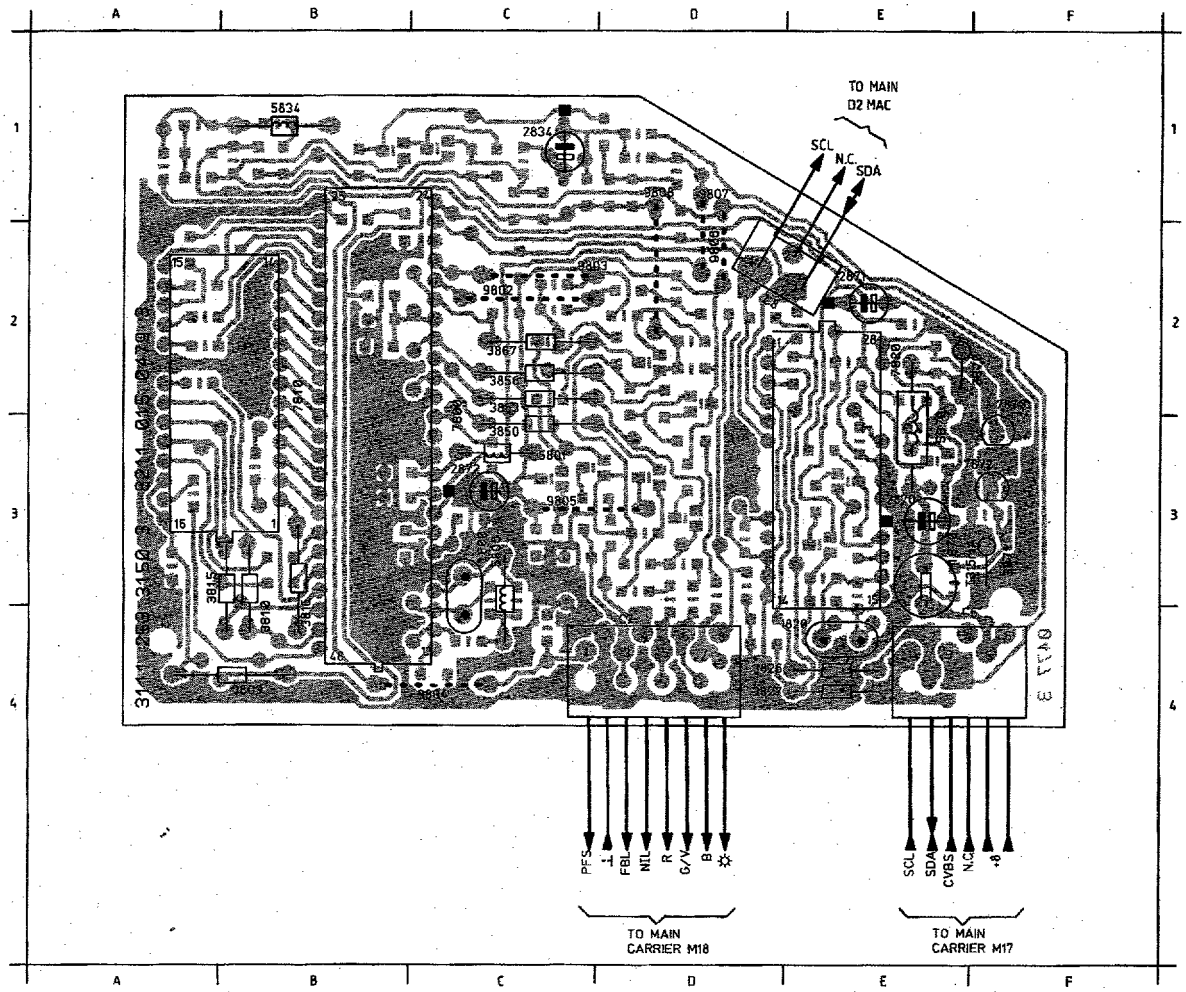

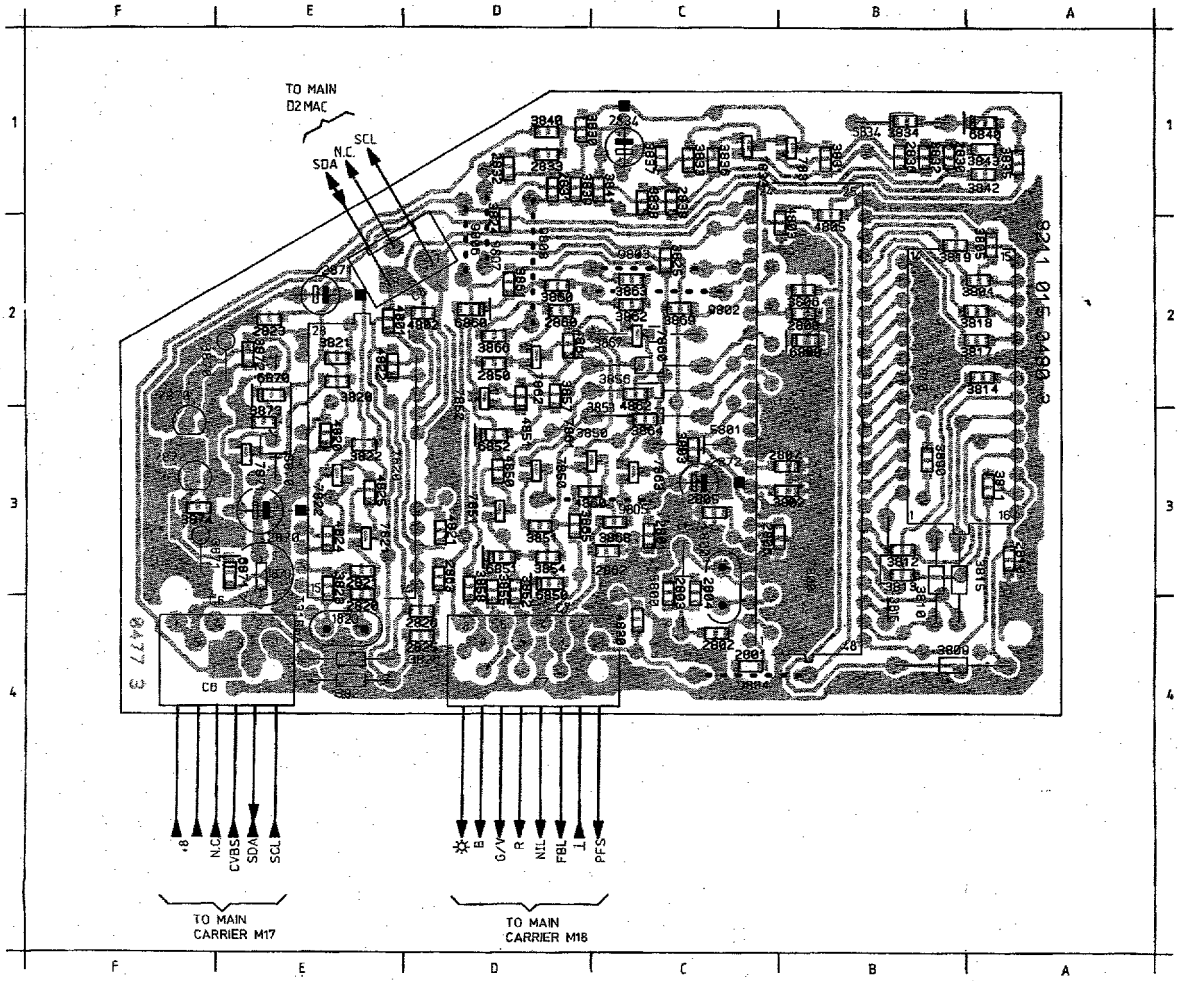

C6 E4
C7 D4
C8 D2
1800 C3
1820 E4
1870 E3
2801 C4
2802 C4
2803 C4
2804 C4
2805 C3
2806 B3
2807 B3
2808 B2
2810 A3
2820 E4
2821 E3
2823 E2
2825 D4
2826 D4
2830 A1
2831 D1
2832 D1
2833 D1
2834 C1
2836 B1
2838 C1
2850 D2
2860 D2
2861 C3
2862 C3
2863 D3
2870 E3
2871 E2
2872 C3
3802 B3
3803 C3
3804 A2
3805 A2
3806 B2
3809 A4
3810 B3
3811 A3
3812 B3
3813 B3
3814 A2
3815 A3
3816 B3
3817 A2
3818 A2
3819 A2
3820 E2
3821 E2
3822 E3
3823 E4
3824 D2
3825 C2
3826 E4
3827 E4
3830 C1
3831 B1
3832 B1
3833 C1
3834 B1
3835 A1
3836 C1
3837 C1
3838 C1
3839 C1
3840 D1
3841 C1
3842 A1
3843 A1
3850 C3
3851 D3
3852 D4
3853 C2
3854 D3
3855 D4
3856 C2
3857 D3
3858 D4
3860 D2
3861 D2
3862 C2
3863 C2
3864 C3
3865 C3
3866 D2
3867 C2
3868 C3
3869 C2
3870 E2
3871 E3
3872 E2
3873 E3
3874 E3
3890 B3
4801 D2
4802 D2
4803 B2
4805 B2
4820 E3
4821 D3
4822 D2
4824 E3
4825 E3
4830 C4
4850 D3
4851 D3
4860 C3
4861 D2
4862 C2
5800 C4
5801 C3
5834 B1
5870 E3
6800 B2
6840 A1
6850 D4
6851 D3
6852 D3
6860 D2
6870 E2
6871 E3
7800 B3
7810 B3
7820 D2
7821 E3
7822 E3
7831 B1
7833 C1
7850 D3
7851 D3
7852 D3
7860 C2
7861 C3
7862 D2
7863 C3
7871 E3
7872 F3
9802 C2
9803 C2
9804 C4
9805 C3
9806 D2
9807 D2
9808 D2

4850 D3
4851 D3
4860 C3
4861 D2
4862 C2
5800 C4
5801 C3
5834 B1
5870 E3
6800 B2
6840 A1
6850 D4
6851 D3
6852 D3
6860 D2
6870 E2
6871 E3
7800 B3
7810 B3
7820 D2
7821 E3
7822 E3
7831 B1
7833 C1
7850 D3
7851 D3
7852 D3
7860 C2
7861 C3
7862 D2
7863 C3
7871 E3
7872 F3
9802 C2
9803 C2
9804 C4
9805 C3
9806 D2
9807 D2
9808 D2

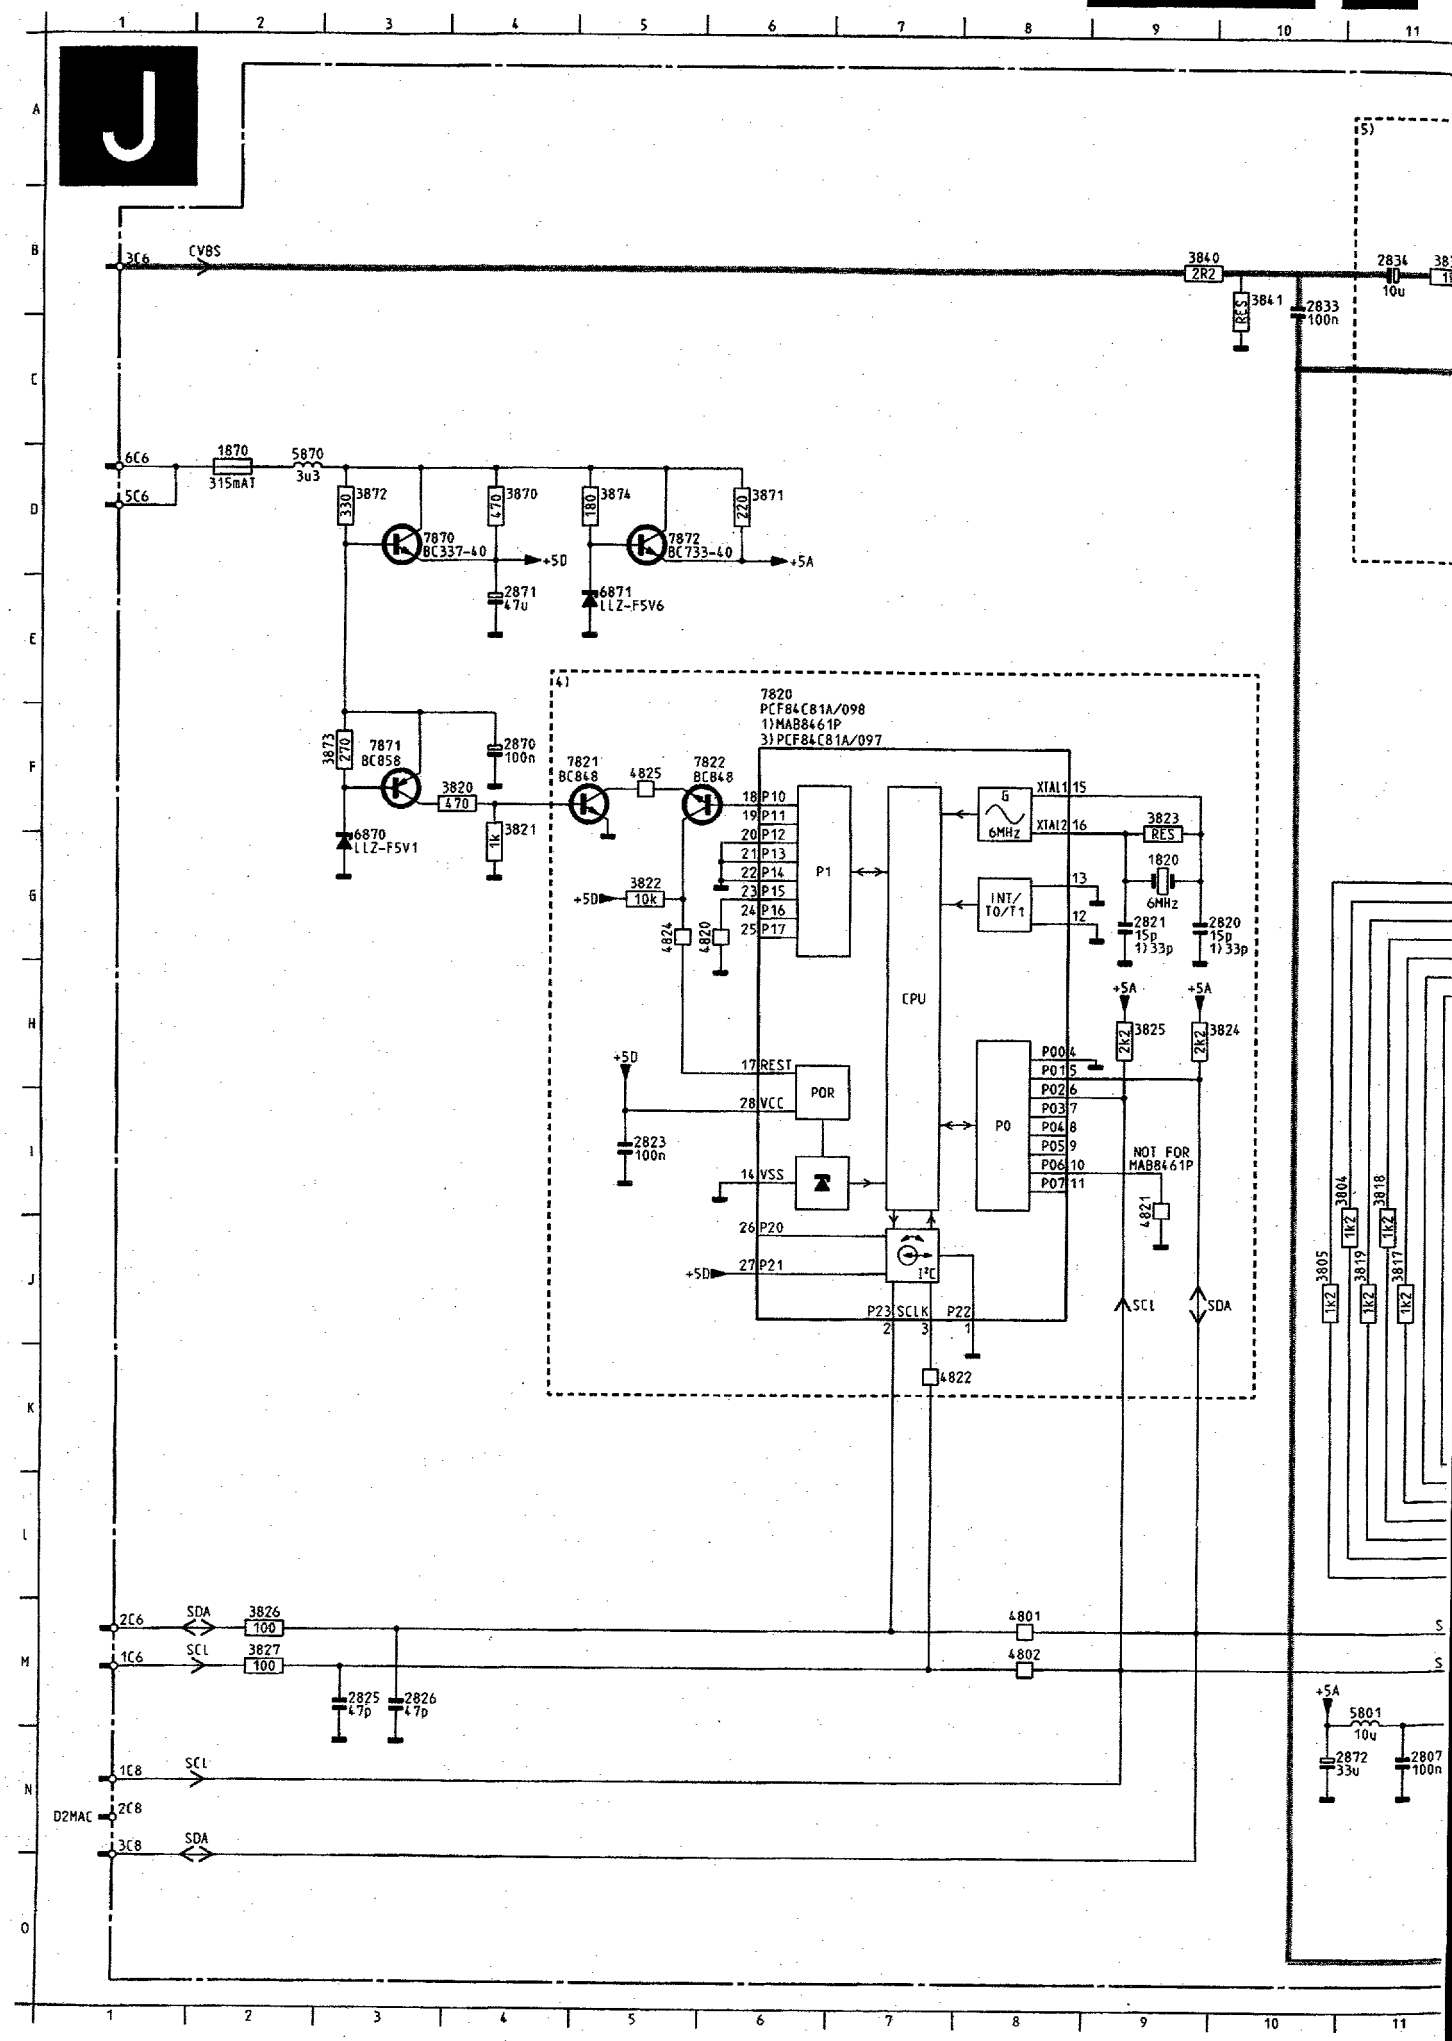

Teletext / Videotext / Teletexte

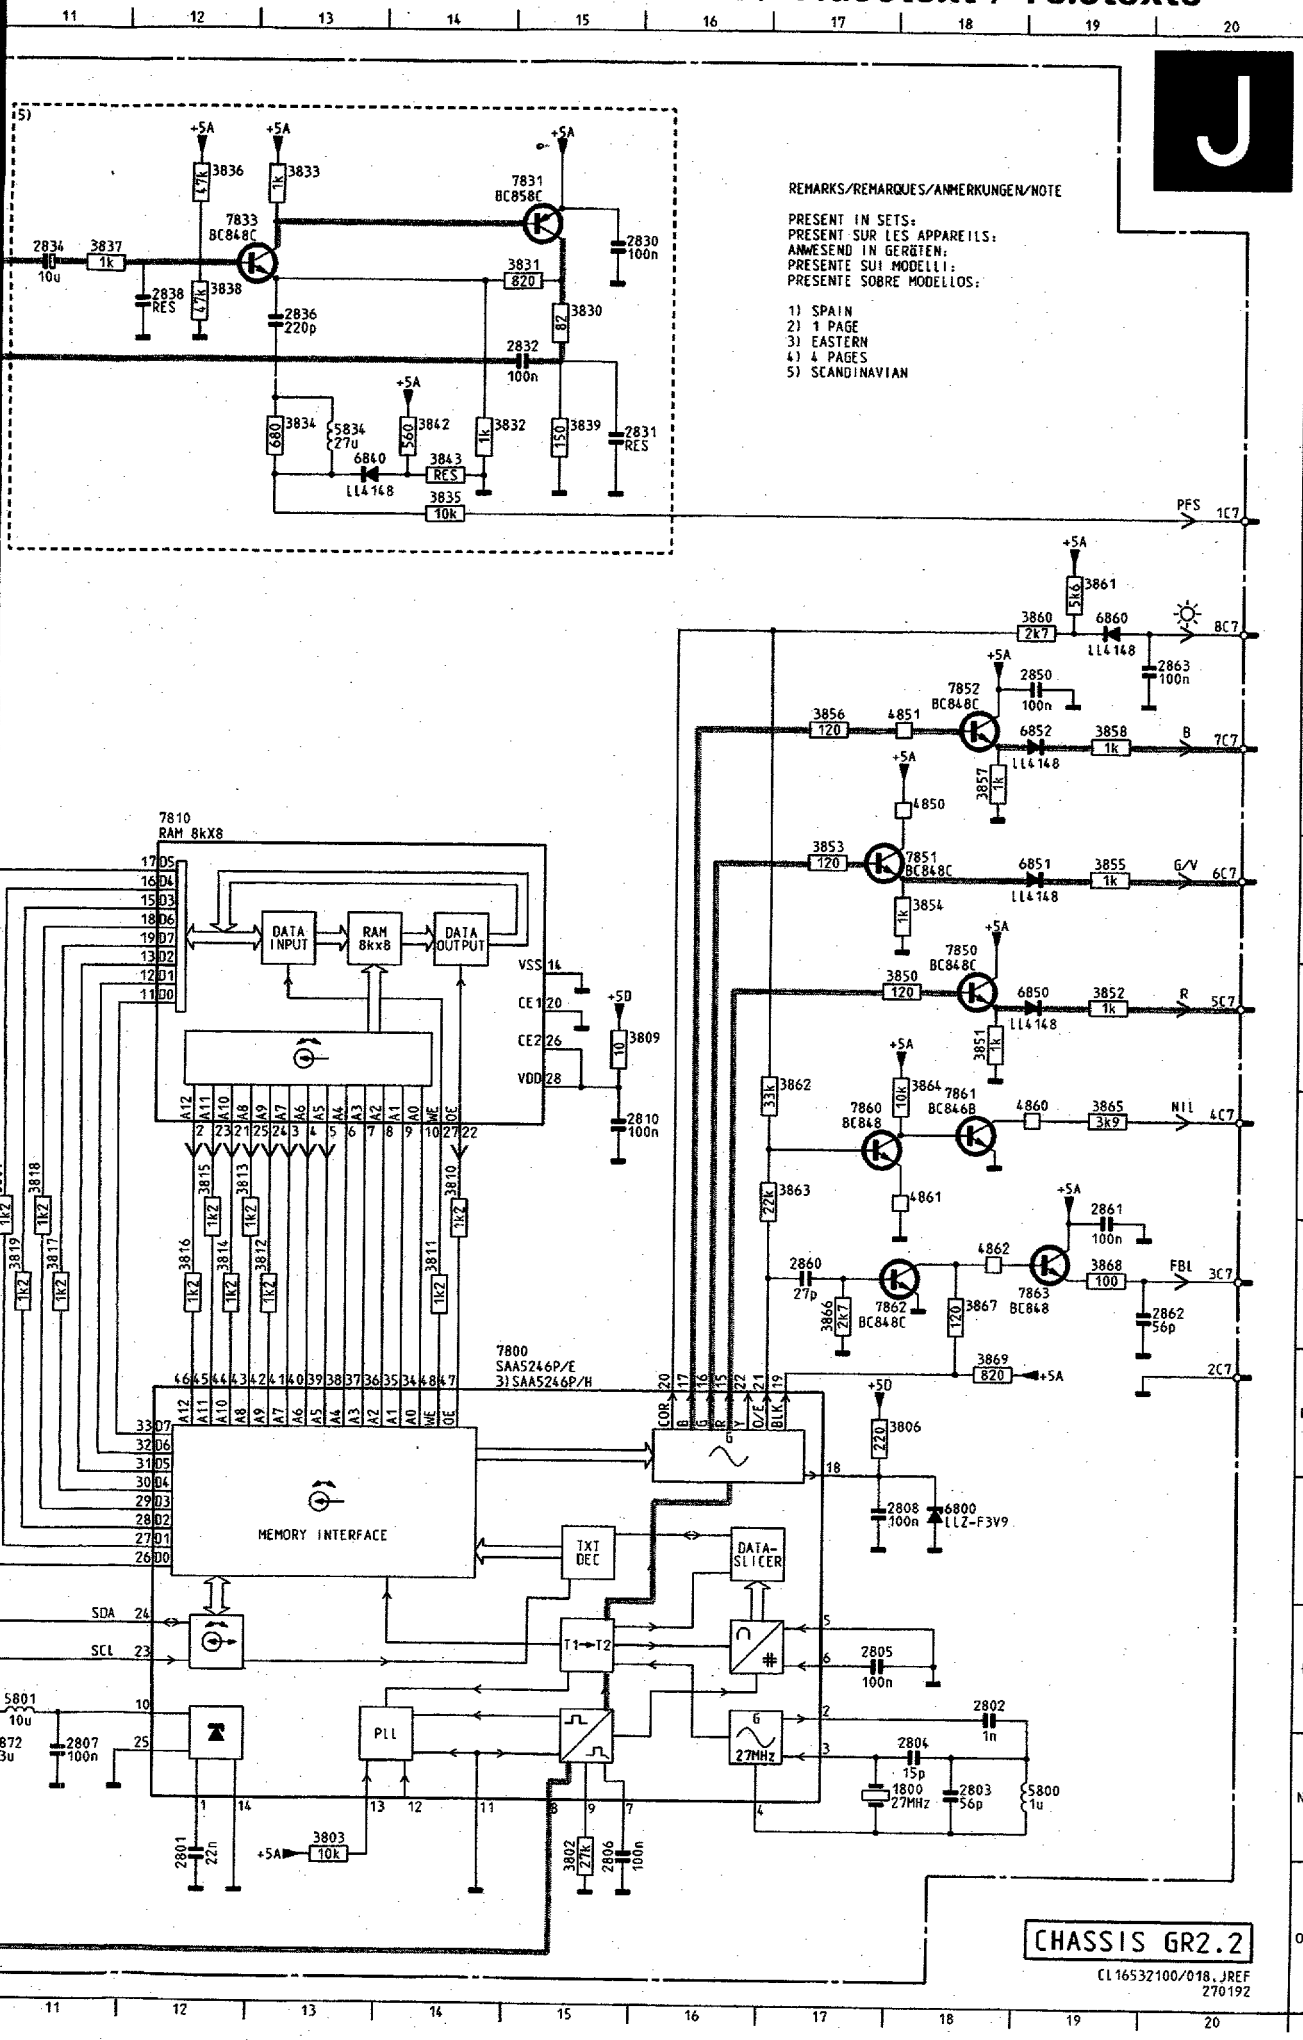

	1800	N18	6870	G 3
	1820	G 9	6871	E 5
	1870	D 2	7800	K14
	2801	O12	7810	F12
A	2802	M18	7820	E 6
	2803	N18	7821	F 5
	2804	N18	7822	F 5
	2805	M17	7831	B15
	2806	O15	7833	B12
	2807	N11	7850	G18
	2808	L17	7851	G18
	2810	I15	7852	E18
B	2820	G 9	7860	I17
	2821	G 9	7861	I18
	2823	I 5	7862	J18
	2825	M 3	7863	J19
	2826	M 3	7870	D 3
	2830	B15	7871	F 3
	2831	C15	7872	D 5
	2832	C15		
C	2833	B10		
	2834	B11		
	2836	C13		
	2838	B12		
	2850	E19		
	2860	J17		
	2861	I19		
D	2862	J20		
	2863	E20		
	2870	F 4		
	2871	E 4		
	2872	N10		
	3802	O15		
	3803	N13		
	3804	I11		
E	3805	J10		
	3806	K17		
	3809	H15		
	3810	I14		
	3811	J14		
	3812	J13		
	3813	I12		
F	3814	J12		
	3815	I12		
	3816	J12		
	3817	J11		
	3818	I11		
	3819	J11		
	3820	F 4		
	3821	F 4		
G	3822	G 5		
	3823	F 9		
	3824	H 9		
	3825	H 9		
	3826	M 2		
	3827	M 2		
	3830	B15		
	3831	B15		
H	3832	C14		
	3833	A13		
	3834	C13		
	3835	D14		
	3836	A12		
	3837	B11		
	3838	B12		
I	3839	C15		
	3840	B 9		
	3841	B10		
	3842	C14		
	3843	D14		
	3850	H18		
	3851	H18		
	3852	H19		
J	3853	G17		
	3854	G18		
	3855	G19		
	3856	F17		
	3857	F18		
	3858	F19		
	3860	E19		
K	3861	D19		
	3862	H17		
	3863	I17		
	3864	H18		
	3865	I19		
	3866	J17		
	3867	J18		
	3868	J19		
L	3869	K18		
	3870	D 4		
	3871	D 6		
	3872	D 3		
	3873	F 3		
	3874	D 5		
	4801	M 8		
M	4802	M 8		
	4820	G 6		
	4821	I 9		
	4822	K 7		
	4824	G 5		
	4825	F 5		
	4850	F18		
	4851	F18		
N	4860	I19		
	4861	I18		
	4862	J18		
	5800	N19		
	5801	M11		
	5834	C13		
	5870	D 2		
	6800	L18		
O	6840	D13		
	6850	H19		
	6851	G19		
	6852	F19		
	6860	E19		

Electrical adjustments

Setting conditions

All electrical settings should be made under the following conditions:

* supply voltage: 220 - 240 V ± 10%; 50 Hz ± 5%
* warming-up time ≈ 10 minutes
* the voltages and oscillograms have been measured with regard to tuner earth.
* measuring probe: Ri > 10 MΩ; Ci < 2.5 pF.

1. Settings on the carrier board

1.1 +148V/+95V supply voltage

Connect a voltmeter over C2631. Using R3635, set the supply voltage to +148V ± 0.5V for 25" and 28" units or to 95V ± 0.5V for 21" units.

1.2 Focusing

This is set using the focusing potentiometer (on the top of the line output transformer).

1.3 Vg2 setting

Connect a pattern generator and supply a blanking frame signal (black picture). Switch the unit to the service default mode (see section 9).
Connect an oscilloscope to the emitters of transistors 7304 and 7364 on the picture tube module. Set the oscilloscope to frame frequency. Measure the DC voltage level of the measuring pulses (see Fig. 7.2). Using the Vg2 potentiometer on the line output transformer, set the measuring pulse with the lowest DC voltage level to:

* +145V ± 5V for 25" and 28" blackline units (protected high-voltage cable)
* +130V ± 5V for 28" non-blackline units
* +118V ± 5V for 25" non-blackline units
* +120V ± 5V for 21" units.

1.4 Horizontal synchronization

Connect pin 5-IC7470 to pin 9-IC7470.
Supply an aerial signal and tune the set.
Adjust potentiometer 3457 until the picture is straight. Remove the interconnection.

1.5 Horizontal centring

Set using potentiometer 3461.

1.6 Vertical centring

Set using potentiometer 3516.

1.7 Picture height

Set using potentiometer 3504.

1.8 Chroma bandpass filter

a. Setting for PAL/SECAM sets (TDA4650)

Connect a signal generator (e.g. PM 5326) to pin 20 of the euroconnector (EXT1) and set its frequency to 4.286 MHz/0.2 Vpp. Switch the unit to EXT1. Connect pin 27-IC7306 to pin 13-IC7306 (+12V). Connect an oscilloscope to pin 15-IC7306.
Set 5301 to maximum amplitude.
Remove the interconnection.

b. Setting for PAL sets (TDA4510)

Connect a signal generator (e.g. PM 5326) to pin 20 of the euroconnector (EXT1) and set its frequency to 4.43 MHz. Connect the unit to EXT1. Connect an oscilloscope to pin 9-IC7305 (TDA4650).Set 5301 to maximum amplitude.

1.9 Chroma auxiliary oscillator

Connect a pattern generator and supply a PAL colour bar pattern. Connect pin 11-IC7305 (TDA4510) or pin 17-IC7306 (TDA4650) to earth. Set 2313 so that the colour on the screen has practically stopped. Remove the interconnection.

1.10 SECAM demodulators for PAL/SECAM sets (TDA4650)

Connect a pattern generator and supply a SECAM black pattern. Connect an oscilloscope to pin 1-IC7306 (TDA4650). Set 5304 to minimum amplitude.Connect the oscilloscope to pin 3-IC7306 (TDA4650). Set 3312 to minimum amplitude.

1.11 White balance

Connect a pattern generator and select a white picture. Switch on the service menu (see section 9) and select "WHITE BALANCE".
Set the value of "Green" to 51, and the Value of "Blue" to 46. In most cases no futher adjustments are required.

1.12 Peak white limit

Switch on the service menu (see section 9) and select "WHITE BALANCE".
Set "WHITE LIMIT" to the value:

- 43 for blackline units
- 53 for non-blackline units
- 53 for 21" units.

1.13 Cut-off points of the picture tube

Connect a pattern generator and select a black picture. Switch on the service menu (see section 9) and select "CUT OFF".
Set the value of "Red" to 56, and fore "Green" to 16, and for "Blue" to 15. In most cases no futher adjustments are required.

1.14 Options

Switch on the service menu and select "OPTION 1" or "OPTION 2".
Switch the options "ON" and "OFF" according to whether the following options are present:

- "PIP" on a PIP set
- "2ND SCART" on a set with two euroconnectors
- "TELETEXT" on a teletext set
- "SVHS" for the Y/C connector in mono sets
- "MULTI SYSTEM" for multisystem sets
- "HYPERBAND" for a tuner which can be tuned to the frequency band of 300 MHz to 450 MHz
- "UHF ONLY" for a tuner which can only be tuned to the UHF band
- "NICAM TWIN" for stereo sets which can also receive NICAM sound.
- "SIXTEEN/NINE" for switching between normal screen size and wide screen size.

MAIN PANEL

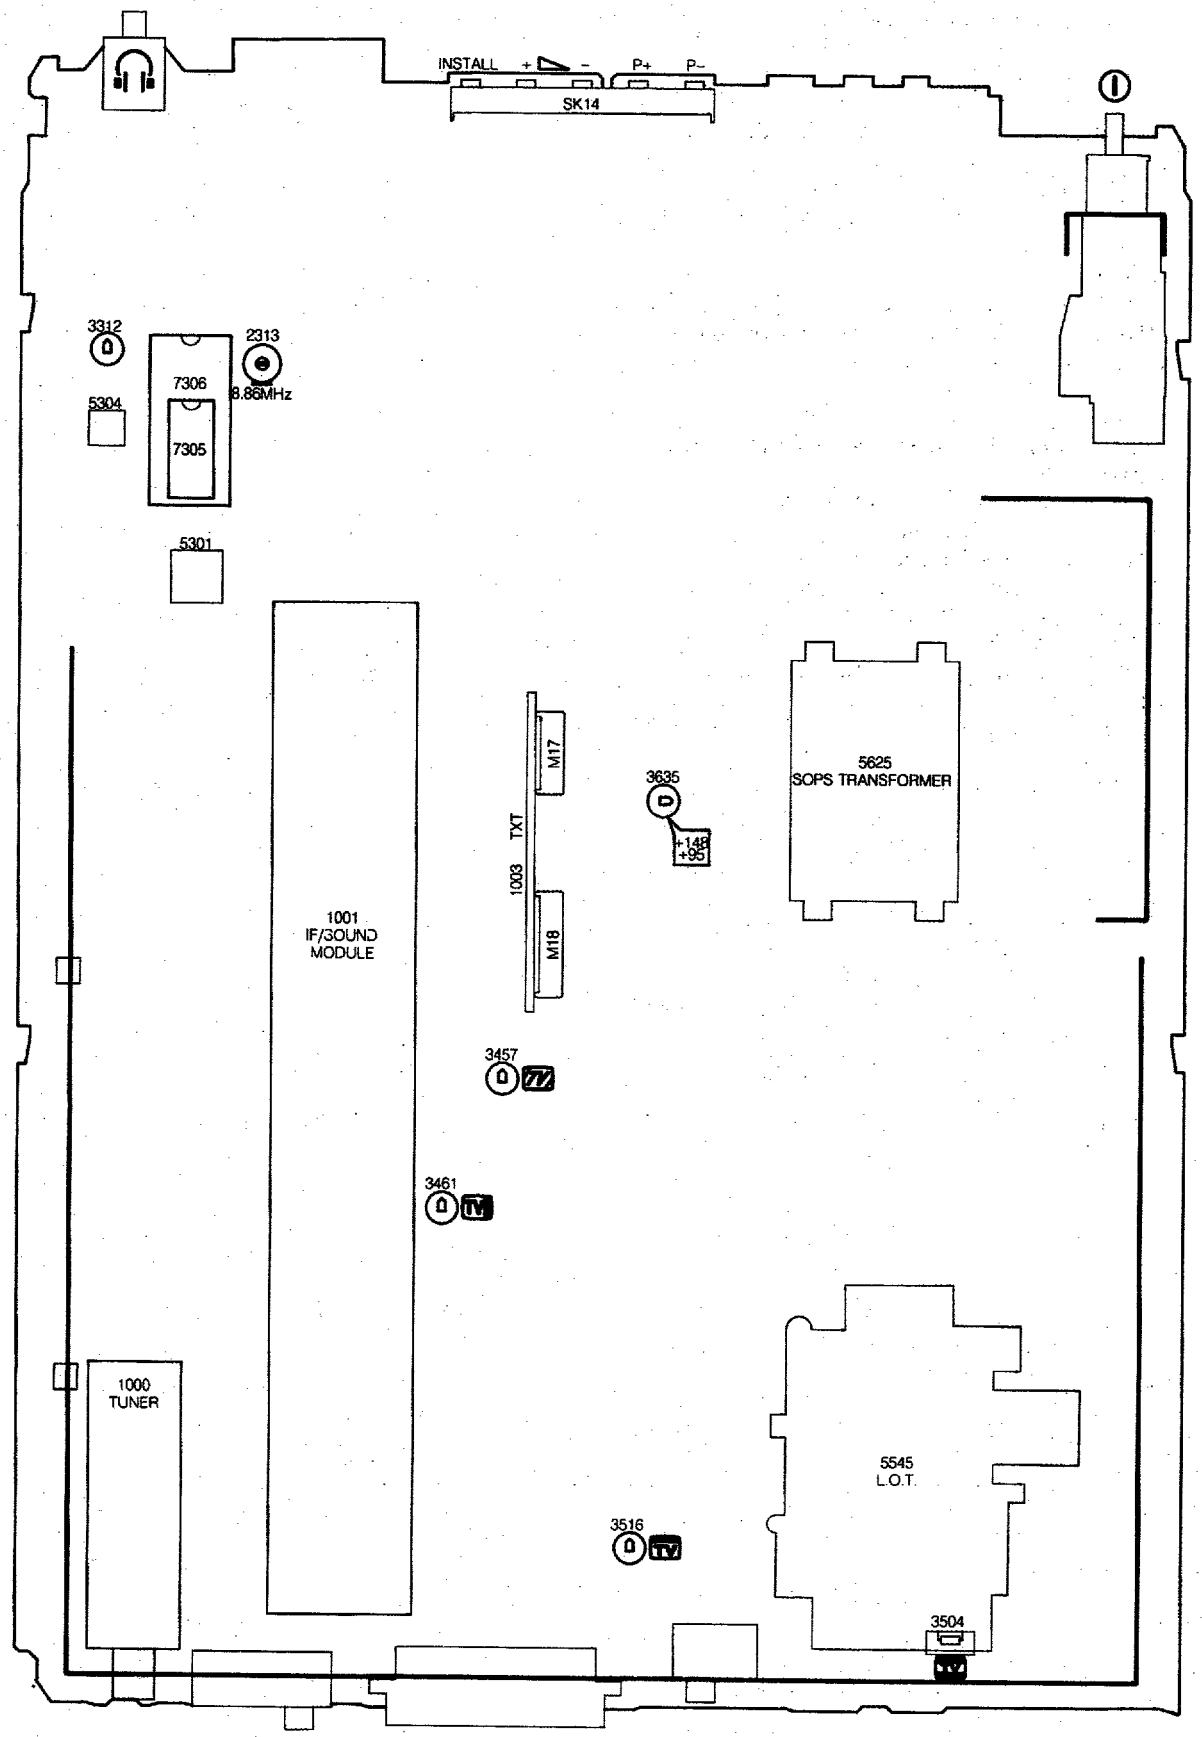

Fig. 7.1



Fig. 7.2

2. MF/sound module adjustment (Fig 7.3)

2.1 The M.F. sound modulator

a. For multi-system France (BGLI).

Stereo + mono:

- Connect a pattern generator (e.g PM 5518) to the tuner and adjust the generator to SECAM L with a frequency of 47.25 MHz (SECAM L'). Adjust L 5080 to minimum picture distortion.
- Adjust the pattern generator to PAL BG with a frequency of 475.25 MHz.

Stereo:

- Connect an oscilloscope to pin 17 of IC 7100 (TDA 3856). Using L 5104 adjust the amplitude of the signal to its minimum value.

b. For Europe (BG) stereo and East-European multi system (BGDK) stereo.

- Adjust the pattern generator to PAL BG with a frequency of 475.25 MHz.
- Connect an oscilloscope to pin 15 of IC 7101 (TDA 3857). Using L 5104 adjust the amplitude of the signal to its minimum value.

c. For NICAM (BGI) stereo.

- Adjust the pattern generator to PAL BG with a frequency of 475.25 MHz.
- Connect an oscilloscope to pin 15 of IC 7100 (TDA 3857). Using L 5103 adjust the amplitude of the signal to its minimum value.

2.2 The FM sound modulator

a. For multi system France (BGLI) + Europe + mono UK.

Adjust the pattern generator to PAL BG with a frequency of 475.25 MHz with stereo L= 3kHz and R= 1kHz.

- 5.5 MHz

Connect an oscilloscope to pin 2 of M 24. Using L 5105 adjust the amplitude to its maximum value.

- 5.74 MHz (only for stereo)

Connect an oscilloscope to pin 3 of M 23. Using L 5103 adjust the amplitude to its maximum value.

b. For East-European multi system (BGDK).

- 6.5 MHz.

Adjust the pattern generator to SECAM DK with a frequency of 475.25 MHz.
Connect an oscilloscope to pin 2 of M 24. Using L 5105 adjust the amplitude to its maximum value.

- 5.74 MHz (only for stereo)

Adjust the pattern generator to PAL BG with a frequency of 475.25 MHz with stereo L= 3kHz and R= 1kHz.
Connect an oscilloscope to pin 3 of M 23. Using L 5103 adjust the amplitude to its maximum value.

c. For NICAM

- NICAM I.

Adjust the pattern generator to PAL I with a frequency of 475.25 MHz.
Select analogue sound.
Connect an oscilloscope to pin 7 of IC 7100 (TDA 3857). Using L 5102 adjust the amplitude to its maximum value.

- NICAM BG.

Adjust the pattern generator to PAL BG with a frequency of 475.25 MHz.
Select analogue stereo sound with L= 3kHz and R= 1kHz.

* 5.5 MHz.

Connect an oscilloscope to pin 7 of IC 7100 (TDA 3857).
Using L 5102 adjust the amplitude to its maximum value.

* 5.74 MHz.

Connect an oscilloscope to pin 6 of IC 7100 (TDA 3857).
Using L 5101 adjust the amplitude to its maximum value.

2.3 AFC and picture demodulation:

Adjust the pattern generator to the system given in the table below (PAL BGI and SECAM BGDK to 475.25 MHz, SECAM L' to 47.25 MHz).

- Connnect an oscilloscope to pin 3 of connector G 29 and using L 5035 or L 5037 (see table) adjust the amplitude to its minimum value.
- Connect an oscilloscope to pin 11 of connector G 29 and using L 5036 or L 5038 (see table) adjust to 2V Dc.

SYSTEM	L5035/L5036	L5037/L5038
Multi French (BGLI) mono/stereo	SECAM L'	SECAM BG/PAL BG
Europe (BG) stereo	PAL BG	--
Europe (BG) mono	--	PAL BG
Multi Eastern- Europe (BGDK) stereo	SECAM K	--
Multi Eastern- Europe (BGDK) mono	--	SECAM K
UK mono	--	PAL I
UK stereo	PAL I	--

2.4 **RF-AGC**
If the picture from a strong local transmitter is distorted, adjust 3016 until the picture is not distorted.

2.5 **MF-AGC** (Multi French (BGLI) system sets).
Connect a pattern generator and select a SECAM-L colour bar signal with a frequency of 475.25 MHz.
Connect an oscilloscope to pin 3 of connector G 29.
Using 3048 adjust the amplitude of the video signal to 1.8 Vpp.

2.6 **Stereo matrix** (stereo and NICAM units)
Connect a pattern generator and supply a PAL BG signal with stereo sound. Select only the right-hand channel sound. Set the balance of the unit completely to the left.
Set 3204 (stereo units) or 3200 (NICAM PAL BG units) to minimum sound reproduction.

NICAM IF/SOUND MODULE

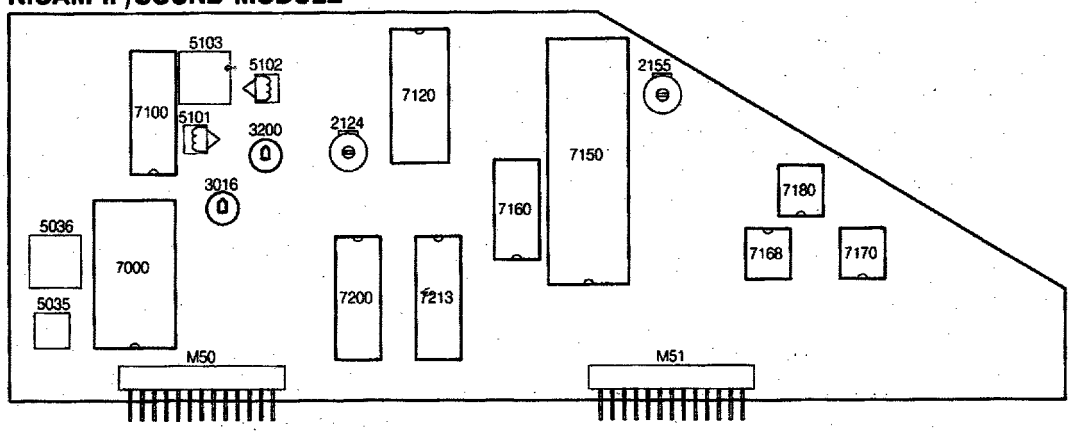

STEREO IF/SOUND MODULE

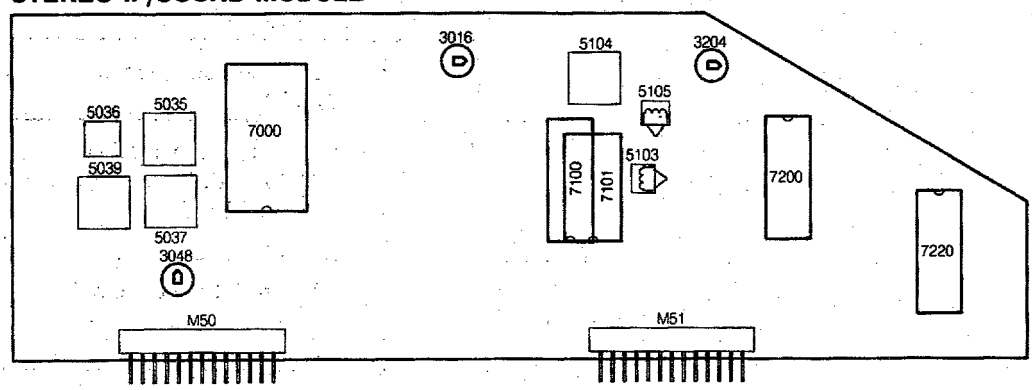

MONO IF/SOUND MODULE

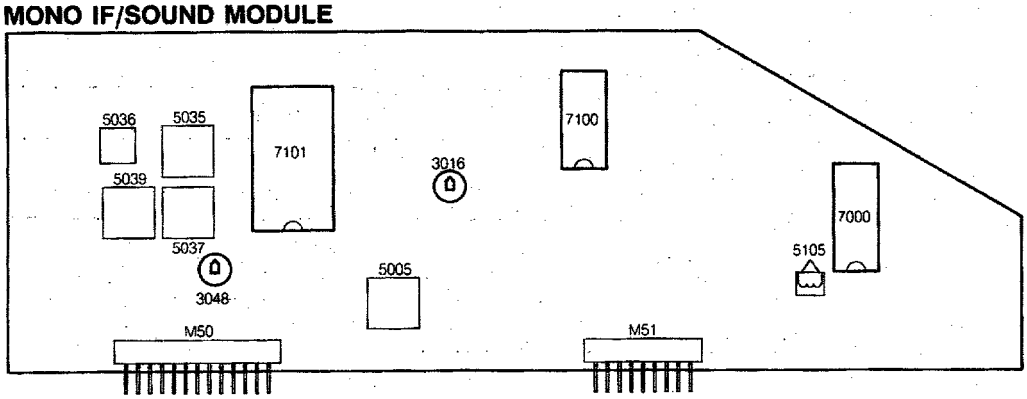

Fig. 7.3

PIP MODULE

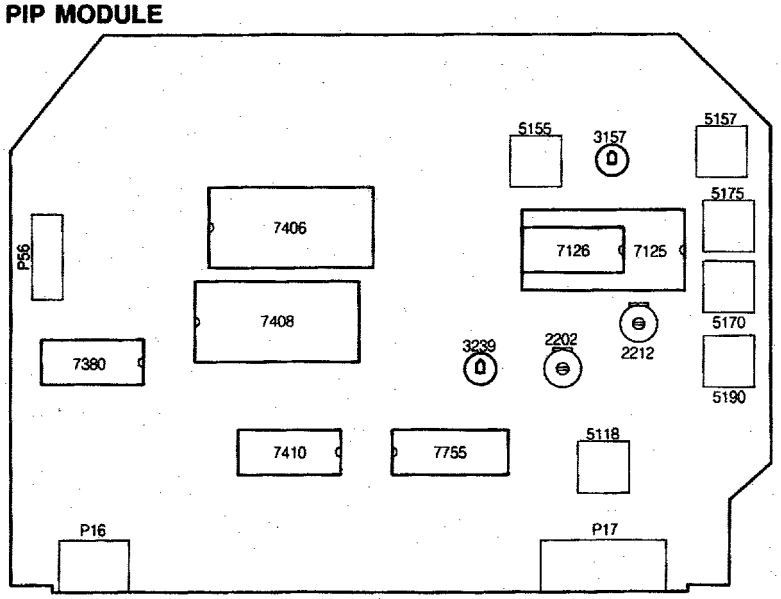

Fig. 7.4

3. Adjustments on the PIP module (Fig. 7.4)

Adjustment conditions
Before making each adjustment, ensure that a PIP picture with the prescribed signal is visible on the screen and that the unit has reached its operating temperature (after ≈ 10 min.).

3.1 Horizontal synchronization
Do not supply an aerial or generator signal.
Connect pin 28-IC7125 to pin 13-IC7125 if TDA4554 is present (PAL selection). Connect pin 5-IC7755 to earth.
Measure the frequency at pin 17-IC7755 and using 3239 set it to 15.625 Hz ± 25 Hz.
Remove the interconnection.

3.2 Chroma bandpass filter

a. Adjustment for PIP modules with TDA4554
Connect a signal generator (e.g. PM 5326) to pin 10 of P17 and set its frequency to 4.286 MHz/0.2 Vpp.
Connect pin 27-IC7125 to 13-IC7125. Connect an oscilloscope to pin 15-IC7125.
Set 5118 to maximum amplitude.
Remove the interconnection.

b. Adjustment for PIP modules with TDA4510
Connect a signal generator (e.g. PM 5326) to pin 10 of P17 and set its frequency to 4.43 MHz/0.2Vpp.
Connect an oscilloscope to pin 9-IC7126.
Set 5118 to maximum amplitude.

3.3 PAL chroma auxiliary oscillator
Connect a pattern generator and supply a PAL colour bar pattern. Connect pin 17-IC7125 (TDA4554) or pin 11-IC7126 (TDA4510) to earth.
Set 2202 so that the colour of the PIP picture is practically still.
Remove the interconnection.

3.4 NTSC chroma auxiliary oscillator for PIP modules with TDA4554
Connect a pattern generator and supply an NTSC M colour bar pattern. Connect pin 17-IC7125 to earth. Set 2202 so that the colour of the PIP picture is practically still.
Remove the interconnection.

3.5 Delay line
Connect a pattern generator and supply a PAL colour bar signal. Connect the X-input of the oscilloscope to pin 1-IC7125 (TDA4554) or pin 1-IC7126 (TDA4510). Connect the Y-input of the oscilloscope to pin 3-IC7125 (TDA4554) or pin 2-IC7126 (TDA4510). Set the oscilloscope to the X-Y position.
Set 5155 and 5157 so that the vectors lie in one line (points which are furthest from the origin).
Set the pattern generator to the "DEM" mode.
Set R3157 so that the vectors lie on top of one another in the origin.

3.6 SECAM identification for PIP modules with TDA4554
Connect a pattern generator and supply a SECAM colour bar signal.
Connect pin 27-IC7125 to pin 13-IC7125.
Connect an oscilloscope to pin 21-IC7125.
Set 5190 to minimum DC level.
Remove the interconnection.

3.7 SECAM demodulators for PIP modules with TDA4554
Connect a pattern generator and supply a SECAM signal without contents (black). Connect pin 27-IC7125 to pin 13-IC7125. Connect an oscilloscope to pin 1-IC7125. Using 5175, set the DC level during the scan equal to the DC level during the flyback.
In the same way set 5170, but now measure at pin 3-IC7125.
Remove the interconnection.

4. Adjustments on the picture tube module

4.1 Picture width
Set using potentiometer 3525.

4.2 East/West correction
Set using potentiometer 3521. This setting is only for 25" and 28" units.

Repair tips

1. Servicing of SMDs (Surface Mounted Devices)

1.1 General cautions on handling and storage

a. Oxidation on the terminals of SMDs results in poor soldering. Do not handle SMDs with bare hands.

b. Avoid using storage places that are sensitive to oxidation such as places with sulphur or chlorine gas, direct sunlight, high temperatures or a high degree of humidity.
The capacitance or resistance value of the SMDs may be affected by this.

c. Rough handling of circuit boards containing SMDs may cause damage to the components as well as the circuit boards. Circuit boards containing SMDs should never be bent or flexed. Different circuit board materials expand and contract at different rates when heated or cooled and the components and/or solder connections may be damaged due to the stress. Never rub or scrape chip components as this may cause the value of the component to change. Similarly, do not slide the circuit board across any surface.

1.2 Removal of SMDs

a. Heat the solder (for 2-3 seconds) at each terminal of the chip. By means of litz wire and a slight horizontal force, small components can be removed with the soldering iron. They can also be removed with a solder sucker (see Fig. 8.1A) or:

b. While holding the SMD with a pair of tweezers, take it off gently using the soldering iron's heat applied to each terminal (see Fig. 8.1B).

c. Remove the excess solder on the solder lands by means of litz wire or a solder sucker (see Fig. 8.1C).

Caution on removal:

a. When handling the soldering iron, use suitable pressure and be careful.

b. When removing the chip, do not use undue force with the pair of tweezers.

c. The soldering iron to be used (approx. 30 W) should preferably be equipped with a thermal control (soldering temperature: 225 to 250°C).

d. The chip, once removed, must **never** be reused.

1.3 Attachment of SMDs

a. Locate the SMD on the solder lands by means of tweezers and solder the component on one side. Ensure that the component is positioned correctly on the solder lands (see Fig. 8.2A).

b. Next complete the soldering of the terminals of the component (see Fig. 8.2B).

Caution when attaching SMDs:

a. When soldering the SMD terminals, do not touch them directly with the soldering iron. The soldering should be done as quickly as possible; care must be taken to avoid damage to the terminals of the SMDs themselves.

b. Keep the SMD's body in contact with the printed board when soldering.

c. The soldering iron to be used (approx. 30 W) should preferably be equipped with a thermal control (soldering temperature: 225 to 250°C).

d. Soldering should not be done outside the solder land.

e. Soldering flux (of rosin) may be used, but should not be acidic.

f. After soldering, let the SMD cool down gradually at room temperature.

g. The quantity of solder must be proportional to the size of the solder land. If the quantity is too great, the SMD might crack or the solder lands might be torn loose from the printed board (see Fig. 8.3).

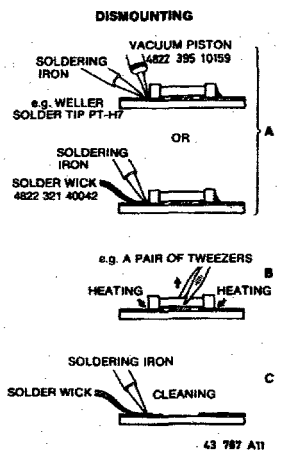

Fig. 8.1

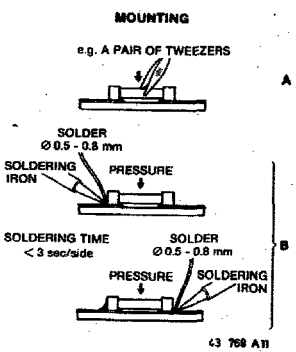

Fig. 8.2



Fig. 8.3

2. Replacing the EEPROM IC7710

If the EEPROM has to be replaced during a repair, the microprocessor will load the EEPROM with a number of default values for the white balance, peak white limit and cut-off point settings.
However, all these values should be checked and adjusted, if necessary.
All options should also be set, the programs installed and personal preference set.

3. Table of error messages

Error indication	Description	Possible fault
OSD: ERR PIP	I^2C fault PIP module	• +5 on PIP module • IC7406
OSD: ERR TXT	I^2C fault TXT module	• +5 on teletext module • IC7800
OSD: ERR NICAM	I^2C fault IC7160 (NICAM units)	• +5 on IF/sound module • IC7160, C2160, C2161, C2221, C2222 • IC7213
OSD: ERR 8415	I^2C fault IC7200 (stereo and NICAM units)	• +14 on IF/Sound module • IC7200 • IC7220
OSD: ERR 8425	I^2C fault IC7213 (NICAM units) I^2C fault IC7220 (Stereo units)	• IC7213/IC7220
OSD: ERR EEPROM	I^2C fault IC7710	• IC7710
OSD: ERR TUNER	I^2C fault tuner	• Tuner • TS7003
OSD: ERR CHROMA	I^2C fault IC7309	• supply IC7309 (+9) • IC7309
Flashing LED	Internal fault in μP	• IC7708
OSD: ERR BUS	I^2C bus blocked	• C2714, C2715

Directions for use

1. Service-Default-Mode

The GR2.2 is equipped with a service default mode. The service default mode is a fixed defined mode in which the unit can be placed.

1.1 Mode definition

The definition of the fixed mode in the service default mode is as follows:

- all sound and picture controls are in the central position (with the exception of the volume which is set to low)
- The set should be tuned to 475.25 MHz
- system:
- * PAL BG, PAL/SECAM BG or PAL I for single system units (option 2 MULTI SYSTEM "OFF")
  * SECAM L for multisystem units. (option 2 MULT SYSTEM "ON")
  * SECAM DK for sets for Eastern-Europa with option 2 MULTI SYSTEM "ON".
  * PAL BG for sets for Eastern-Europa with option 2 MULTI SYSTEM "OFF".

1.2 Switching on and off

The service default mode is switched on by briefly short-circuiting the pins M33 and M34 (SERVICE) behind the INSTALL key on the carrier panel when switching the unit on with the mains switch. In order to indicate that the unit is in the service default mode, an "SER" appears on the screen. The service default mode can only be switched off by switching the unit to standby (⏻). If the unit is switched off and then on again using the mains switch or mains plug, the service default mode remains switched on.

1.3 Operation and extra facilities

In addition to the fact that the unit can be operated normally, in the service default mode two extra functions are available:

- Autostore
  When operating the **install** key on the local control panel, the unit is tuned to the next transmitter frequency. This frequency is also stored under the selected programme number. Therefore the installation menu cannot be accessed in the service default mode!
- Service menu
  The service menu is activated by first pressing the ◿ - key and then at the same time the P+ key on the local control panel. The service menu now appears on the screen. The service menu offers the facility to set various options and make a number of picture tube settings. The various components in the service menu are selected using the coloured keys on the remote control. The various components themselves are adjusted using the + and - keys on the remote control.The values and options set are immediately stored in the EEPROM.

Note 1:
If the service menu does not appear on the screen and the autostore function does not react, then the "LOCK" function is probably activated.
If the autostore function only does not react, the hotel mode is activated.

Note 2:
If a multisystem unit in the service default mode is to be used with the PAL/SECAM BG system, option 2 "MULTI SYSTEM" may be temporarily disabled "OFF".

Note 3:
If a multi-system set for Eastern-Europe in the service default mode is nevertheless to be used with the PAL BG system, option 2 "MULTI SYSTEM" may be temporarily disabled ("OFF").

2. Hotel mode

In the hotel mode the volume control is limited to a maximum to be set beforehand and the installation menu cannot be called up.

2.1 Switching the hotel mode on and off

Select programme number 38.
First press ◿ + and keep this depressed while pressing P -.

Survey of menus

MAIN MENU STEREO

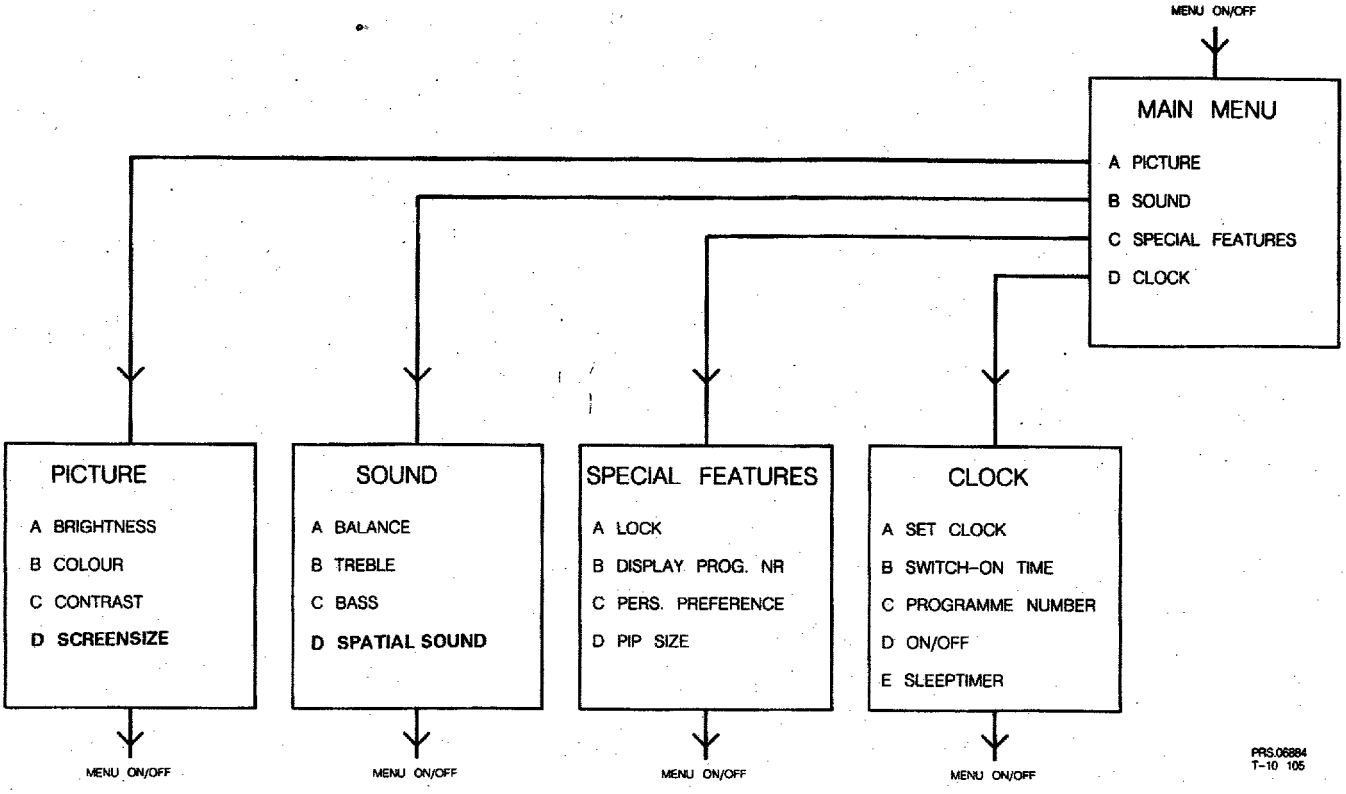

MAIN MENU MONO

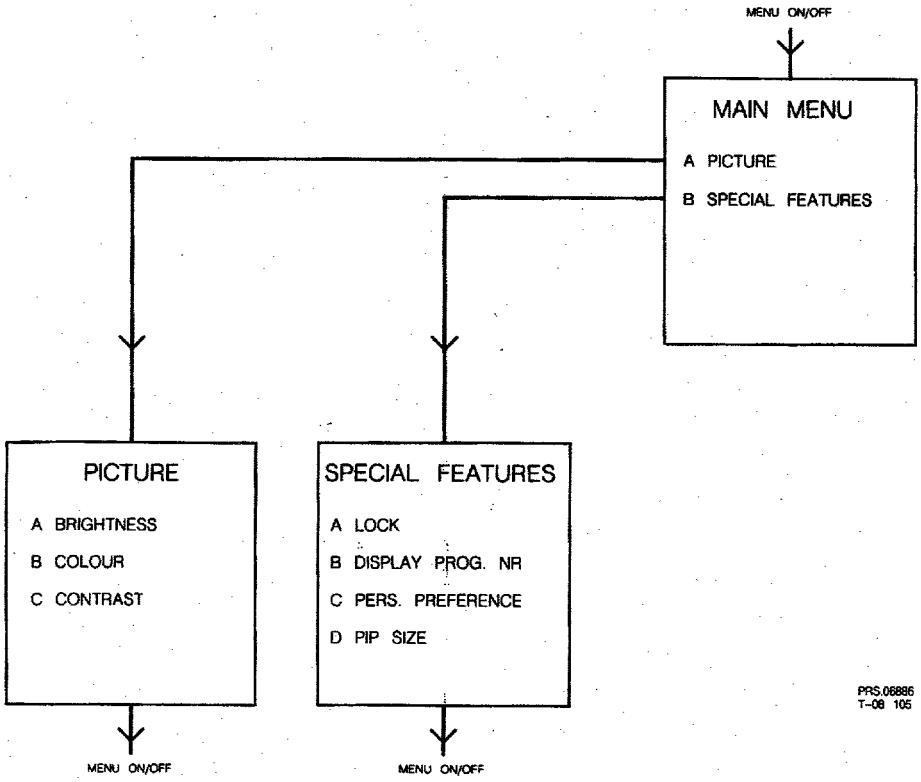

INSTALLATION MENU

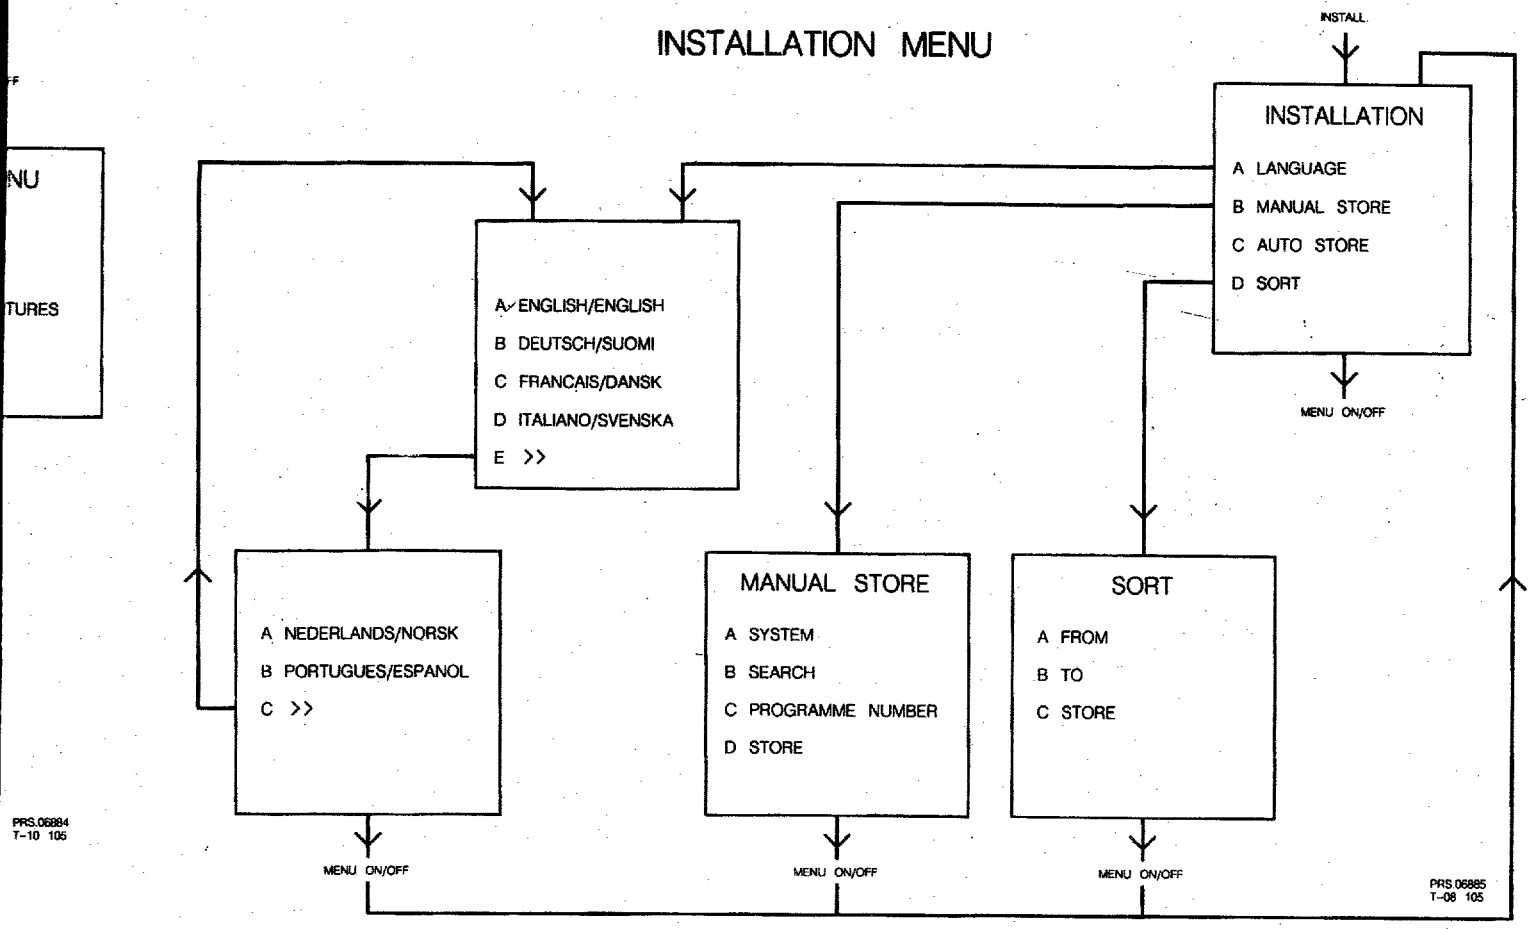

PRS.06884
T-10 105

SERVICE MENU

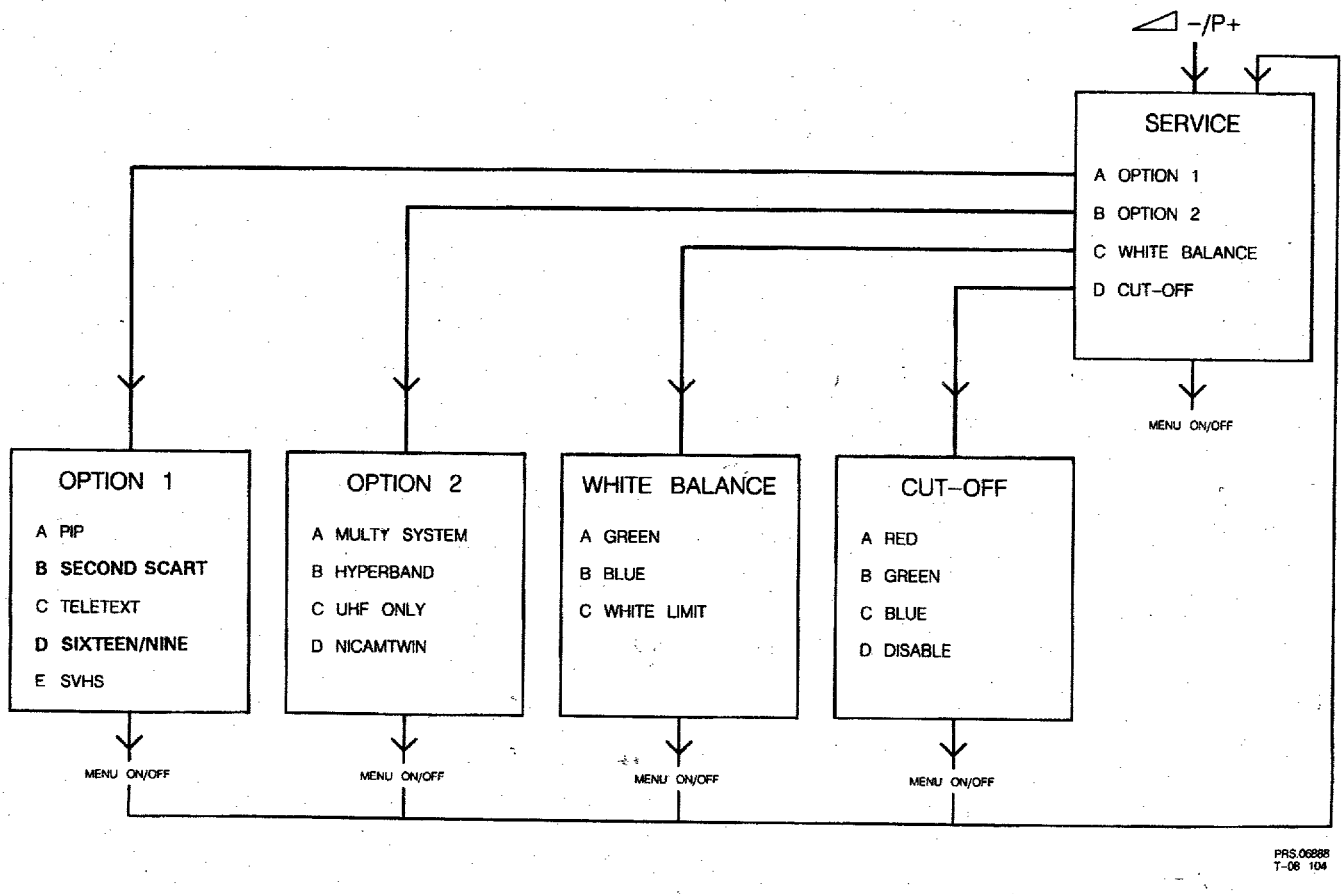

Main Carrier

Mechanical parts

	4822 492 70871	spring wire
	4822 404 31174	bracket EURO module
▲	4822 256 91766	Spring fix.
0103	4822 466 93111	insulator
0170	4822 466 30395	shield for µP
0010	4822 265 30389	2p male
0011	4822 265 30389	2p male
0012	4822 265 30351	5p male
0013	4822 265 30378	4p male
0014	4822 290 40295	7p male
0015	4822 265 40421	6p male
0016	4822 264 40207	3p male
0017	4822 267 50591	6p male
0018	4822 264 50148	8p male
0019	4822 264 40239	3p male
0022	4822 267 40666	3p male
0023	4822 264 40207	3p male
0024	4822 264 40207	3p male
0027	4822 265 30351	5p male
0028▲	4822 265 30877	3p
0029	4822 265 41086	9p male
0032	4822 290 40283	5p male
0035	4822 267 20387	SVHS-connector
0039	4822 267 31014	bushing
0040	4822 267 40878	3p male
0041	4822 276 50354	switch
0042▲	4822 256 30274	Fuse holder
0047	4822 267 30631	cinch fem. 2p
0049	4822 267 60243	euro connector
	4822 267 30546	6p female
	4822 267 50637	10p female

Various

1000	4822 210 10436	U944C/IEC
1000	4822 210 50124	UV916E/IEC
1002	4822 526 10405	ferrite bead
1003	4822 212 23667	infra red receiver
1004	4822 526 10405	ferrite bead
1240	4822 071 51602	fuse T1.6A
1242	4822 071 51602	fuse T1.6A
1300	4822 242 70304	8,867MHz
1534	4822 071 53151	fuse T315mA
1559	4822 071 51002	fuse T1A
1580	4822 071 51602	fuse T1.6A
1600	4822 070 32002	fuse T2A
1601	4822 071 52502	fuse T2.5A
1702	4822 242 70392	6MHz

⊣⊢

2001	4822 124 40849	330µF 20% 16V
2002	4822 122 31797	22nF 10% 63V
2003	4822 122 31947	100nF 20% 63V
2008	4822 122 31765	100pF 5% 50V
2010	4822 124 40435	10µF 20% 50V
2231	4822 124 41525	100µF 20% 25V
2232	4822 122 32863	22nF 80% 50V
2233	4822 122 32863	22nF 80% 50V
2234	4822 122 32863	22nF 80% 50V
2235	4822 122 32863	22nF 80% 50V
2236	4822 122 31784	4,7nF 10% 50V
2237	4822 122 31947	100nF 20% 63V
2238	4822 122 31784	4,7nF 10% 50V
2238[1b]	4822 122 32597	6,8nF 10% 63V
2239	4822 122 31947	100nF 20% 63V
2240	4822 124 40214	1000µF 20% 25V
2241	4822 122 31947	100nF 20% 63V
2242	4822 124 40214	1000µF 20% 25V
2243	4822 122 32863	22nF 80% 50V
2245	4822 122 32863	22nF 80% 50V
2246[1b]	4822 124 40849	330µF 20% 16V
2246	4822 124 41596	22µF 20% 50V
2248	4822 124 40849	330µF 20% 16V
2249	4822 122 32863	22nF 80% 50V
2250	4822 121 41857	10nF 5% 250V
2251	4822 121 41857	10nF 5% 250V
2252	4822 121 51252	470nF 5% 63V
2254	4822 121 51252	470nF 5% 63V
2255	4822 121 51252	470nF 5% 63V
2256	4822 122 32142	270pF 5% 63V
2257	4822 122 32142	270pF 5% 63V
2262	4822 122 32142	270pF 5% 63V
2263	4822 122 32142	270pF 5% 63V
2264	4822 121 51252	470nF 5% 63V
2265	4822 121 51252	470nF 5% 63V
2266	4822 124 41796	22µF 20% 16V
2300	4822 122 32482	22pF 5% 63V
2301	4822 122 31773	560pF 5% 50V
2303	4822 122 32142	270pF 5% 63V
2304[7]	4822 122 31773	560pF 5% 50V
2304	4822 122 32999	2,2nF 5%
2305	4822 126 10324	33pF 63V
2306	4822 122 31965	220pF 5% 63V
2307	4822 122 31965	220pF 5% 63V
2308	4822 122 32442	10nF 50V
2309	4822 122 32442	10nF 50V
2310	4822 122 32442	10nF 50V
2311	4822 122 33496	100nF 10% 63V
2312	4822 122 32442	10nF 50V
2313	4822 125 50045	20pF
2314	5322 121 42661	330nF 5% 63V
2315[2,4]	4822 122 32139	12pF 5% 63V
2315[1,3]	4822 122 32504	15pF 5% 50V
2316	4822 122 31825	27pF 10% 50V
2317	4822 122 33466	82pF 2%
2318	4822 122 32875	100pF 5% 50V
2319	4822 122 31825	27pF 10% 50V
2320[2,4]	4822 122 31772	47pF 5% 50V
2320[1,3]	4822 122 31839	82pF 10% 50V
2321	4822 122 31797	22nF 10% 63V
2322	4822 122 31797	22nF 10% 63V
2323	4822 122 32542	47nF 10% 63V
2325	4822 122 32542	47nF 10% 63V
2326[7,8]	4822 051 10008	jumper
2326	4822 122 33496	100nF 10% 63V
2328[1,3]	4822 121 41856	22nF 5% 250V
2328[2,4]	4822 121 42408	220nF 5% 63V
2329[1,3]	4822 121 41856	22nF 5% 250V
2329[2,4]	4822 121 42408	220nF 5% 63V
2330	4822 122 31765	100pF 5% 50V
2331	4822 122 31765	100pF 5% 50V
2332	5322 122 31842	330pF 5% 63V
2333	4822 121 42408	220nF 5% 63V
2334	4822 122 31965	220pF 5% 63V
2335	4822 122 31965	220pF 5% 63V
2336	4822 122 31797	22nF 10% 63V
2337	4822 122 31797	22nF 10% 63V
2338	4822 122 31797	22nF 10% 63V
2339	4822 122 33496	100nF 10% 63V
2340	4822 122 31797	22nF 10% 63V
2341	4822 122 31797	22nF 10% 63V
2342	4822 122 33496	100nF 10% 63V
2343	4822 122 33496	100nF 10% 63V
2344	4822 122 33496	100nF 10% 63V
2345	4822 122 31797	22nF 10% 63V
2346	4822 122 31765	100pF 5% 50V
2347	4822 122 31769	18pF 5% 50V
2349	5322 122 31647	1nF 10% 63V
2350	4822 122 31797	22nF 10% 63V
2351	4822 122 31797	22nF 10% 63V
2352	5322 122 31647	1nF 10% 63V
2353	4822 122 33496	100nF 10% 63V
2354	4822 124 40242	1µF 20% 63V
2355	4822 124 40849	330µF 20% 16V
2356	4822 122 31797	22nF 10% 63V
2357	4822 122 31797	22nF 10% 63V
2358	4822 122 31797	22nF 10% 63V
2359	4822 122 31765	100pF 5% 50V
2360	4822 122 33496	100nF 10% 63V
2361	4822 122 33496	100nF 10% 63V
2362	4822 122 33496	100nF 10% 63V
2363	4822 122 31972	39pF 5% 50V
2365	5322 121 42661	330nF 5% 63V
2366	4822 124 41566	3,3µF 20% 50V
2367	4822 124 41578	6,8µF 20% 50V
2368	4822 122 32139	12pF 5% 63V
2370	4822 121 42408	220nF 5% 63V
2371	4822 122 31825	27pF 10% 50V
2372	4822 122 31825	27pF 10% 50V
2373	4822 122 31825	27pF 10% 50V
2374	4822 122 31772	47pF 5% 50V
2375	4822 122 31765	100pF 5% 50V
2376	4822 122 31765	100pF 5% 50V
2380	4822 122 31766	120pF 5% 50V
2381	4822 122 31766	120pF 5% 50V
2384	4822 122 31772	47pF 5% 50V
2385	4822 122 31765	100pF 5% 50V
2386	4822 122 33481	1,8nF 15%
2450	4822 124 80059	100µF 20% 25V
2451	4822 122 33496	100nF 10% 63V
2455	5322 122 31647	1nF 10% 63V
2455[2]	5322 122 33446	3,3nF 10% 63V
2456	4822 124 80059	100µF 20% 25V
2457	4822 122 33496	100nF 10% 63V
2458	4822 121 42937	2.7nF 1% 250V
2459	4822 122 33496	100nF 10% 63V
2460[1]	4822 122 31644	2,2nF 10% 63V
2460	4822 122 32442	10nF 50V
2461	5322 122 31647	1nF 10% 63V
2462	4822 122 31797	22nF 10% 63V
2464	4822 122 33496	100nF 10% 63V
2465	4822 124 40849	330µF 20% 16V
2466	4822 124 22403	10µF 20% 16V
2467	4822 122 33496	100nF 10% 63V
2468	4822 124 40244	2,2µF 20% 63V
2469	4822 124 41596	22µF 20% 50V
2470	4822 122 31772	47pF 5% 50V
2471	5322 121 42661	330nF 5% 63V
2473	5322 121 42661	330nF 5% 63V
2475	4822 122 33496	100nF 10% 63V
2500[3]	4822 122 31727	470pF 5% 63V
2500[4]	4822 122 31771	390pF 5% 50V
2500[1,2]	4822 122 31965	220pF 5% 63V
2501	4822 122 33481	1,8nF 15%
2502	5322 124 41381	22µF 20% 50V
2505	4822 122 32542	47nF 10% 63V
2506[3]	4822 124 80062	470µF 20% 35V
2506[4]	4822 124 80063	680µF 20% 35V
2506[1,2]	4822 124 80065	1000µF 20% 50V
2507	4822 122 31797	22nF 10% 63V
2509	5322 124 41379	2,2µF 20% 50V
2524	4822 124 42167	4,7µF 20% 50V
2538	4822 121 43856	4.7nF 5% 250V
2539	4822 124 80057	330µF 20% 16V

Main carrier

2545▲[1,2]	4822 126 10202	1,5nF 10% 2KV
2545▲[3,4]	4822 126 11539	1,2nF 10% 2KV
2546▲[1]	4822 121 43061	8,2nF 5% 1,6KV
2546▲[2]	4822 121 43076	11nF 5% 1600V
2546▲[3]	4822 121 70109	7,5nF 5% 1,6KV
2546▲[4]	5322 121 44345	15nF 5% 1,6KV
2547▲[1,2]	4822 121 40488	22nF 10% 400V
2547▲[3]	5322 121 44151	33nF 10% 400V
2547▲[4]	5322 121 44219	47nF 10% 400V
2549[1]	4822 121 42073	390nF 10% 400V
2549[2]	4822 121 42074	470nF 10% 400V
2550▲[1,2]	4822 121 51527	390nF 5% 250V
2550▲[3]	4822 121 51601	470nF 10% 200V
2550▲[4]	5322 121 44128	680nF 10% 250V
2551	4822 124 80069	1µF 20% 160V
2559	4822 124 80059	100µF 20% 25V
2560▲	4822 121 51408	33nF 10% 250V
2570	4822 124 80071	22µF 20% 160V
2574	4822 122 10175	2,2nF 10% 50V
2580	4822 124 80061	1000µF 20% 25V
2585[2]	4822 124 80058	68µF 20% 25V
2585[1]	5322 124 21731	10µF 20% 50V
2588[1,2]	4822 122 31644	2,2nF 10% 63V
2588[4]	5322 122 31647	1nF 10% 63V
2590	5322 121 42498	680nF 5% 63V
2600▲	4822 124 41531	470nF 10% 250V
2605▲[1,2]	4822 124 80053	220µF 20% 385V
2605▲[3,4]	4822 124 80134	150µF 20% 400V
2607▲	4822 121 51469	1nF 400V
2611	5322 124 41299	68µF 20% 25V
2617[3,4]	4822 121 51252	470nF 5% 63V
2617[1,2]	4822 121 51319	1µF 10% 63V
2620	5322 121 42465	68nF 5% 63V
2625	4822 122 40593	1nF 10% 1KV
2626	4822 122 40594	470pF 10% 1KV
2629	4822 122 31784	4,7nF 10% 50V
2630[3,4]	4822 124 23418	47µF 200V
2630[1,2]	4822 124 80055	100µF 10% 160V
2631[3,4]	4822 124 23418	47µF 200V
2631[1,2]	4822 124 80055	100µF 10% 160V
2632	4822 126 11382	1nF 10% 1KV
2636	4822 122 31644	2,2nF 10% 63V
2640	4822 124 80061	1000µF 20% 25V
2641	4822 124 80061	1000µF 20% 25V
2646	4822 124 80054	15µF 20% 50V
2649	4822 122 33496	100nF 10% 63V
2650	4822 122 33496	100nF 10% 63V
2652	5322 122 32331	1nF 10% 100V
2653	5322 122 32331	1nF 10% 100V
2658	5322 122 32838	82nF 10% 63V
2660	4822 124 80061	1000µF 20% 25V
2661	4822 124 41506	47µF 20% 16V
2662[3,4]	4822 122 31965	220pF 5% 63V
2662[1,2]	4822 122 32142	270pF 5% 63V
2663[3,4]	4822 122 31765	100pF 5% 50V
2663[1,2]	4822 122 31839	82pF 10% 50V
2664	5322 124 41379	2,2µF 20% 50V
2670	4822 122 31766	120pF 5% 50V
2671	4822 121 42408	220nF 5% 63V
2675[3,4]	4822 124 80064	680µF 20% 50V
2675[1,2]	4822 124 80065	1000µF 20% 50V
2676	5322 122 32331	1nF 10% 100V
2704	4822 122 32542	47nF 10% 63V
2705	4822 122 31766	120pF 5% 50V
2706	5322 124 41299	68µF 20% 25V
2707	4822 122 32442	10nF 50V
2708	4822 122 31766	120pF 5% 50V
2709	4822 122 32507	6,8pF 5% 50V
2710	4822 122 32507	6,8pF 5% 50V
2711	4822 122 31825	27pF 10% 50V
2712	4822 122 31825	27pF 10% 50V
2713	4822 124 41525	100µF 20% 25V
2714	4822 122 31766	120pF 5% 50V
2715	4822 122 31766	120pF 5% 50V
2716	4822 122 33496	100nF 10% 63V
2717	4822 122 31644	2,2nF 10% 63V
2718	4822 122 33496	100nF 10% 63V
2719	5322 121 42386	100nF 5% 63V
2721	4822 122 32442	10nF 50V
2722	4822 122 31947	100nF 20% 63V
2781	4822 122 33496	100nF 10% 63V
2850	4822 124 41506	47µF 20% 16V
2851	4822 122 31766	120pF 5% 50V
2852	4822 122 33496	100nF 10% 63V
2853	4822 122 31784	4,7nF 10% 50V
2854	4822 122 33496	100nF 10% 63V
2875	5322 121 42386	100nF 5% 63V

3001▲	4822 052 10399	39Ω 5% 0,33W
3002	4822 051 10223	22k 2% 0,25W
3003	4822 051 20222	2k2 5% 0,1W
3010	4822 051 10102	1k 2% 0,25W
3218	4822 116 52228	680Ω 5% 0,5W
3219	4822 116 52228	680Ω 5% 0,5W
3220	4822 051 10392	3k9 2% 0,25W
3221	4822 050 11002	1k 1% 0,4W
3222	4822 116 52234	100k 5% 0,5W
3224	4822 116 52256	2k2 5% 0,5W
3225	4822 051 10272	2k7 2% 0,25W
3226	4822 051 10333	33k 2% 0,25W
3227	4822 051 10333	33k 2% 0,25W
3228	4822 051 10151	150Ω 2% 0,25W
3229	4822 051 10562	5k6 2% 0,25W
3230	4822 116 52257	22k 5% 0,5W
3231	4822 051 10472	4k7 2% 0,25W
3232[1b]	4822 051 10008	jumper
3232	4822 051 10101	100Ω 2% 0,25W
3233	4822 051 10103	10k 2% 0,25W
3234	4822 051 10223	22k 2% 0,25W
3235	4822 051 10223	22k 2% 0,25W
3236	4822 051 10122	1k2 2% 0,25W
3237	4822 051 10122	1k2 2% 0,25W
3237[1b]	4822 051 10562	5k6 2% 0,25W
3238	4822 051 10122	1k2 2% 0,25W
3239	4822 116 52207	1k2 5% 0,5W
3240▲	4822 052 10828	8Ω2 5% 0,33W
3241▲	4822 052 10828	8Ω2 5% 0,33W
3242	4822 051 10333	33k 2% 0,25W
3243	4822 051 10333	33k 2% 0,25W
3244	4822 051 10103	10k 2% 0,25W
3245	4822 051 10103	10k 2% 0,25W
3246	4822 050 23301	330Ω 1% 0,6W
3247	4822 116 52175	100Ω 5% 0,5W
3248	4822 050 23301	330Ω 1% 0,6W
3249	4822 116 52175	100Ω 5% 0,5W
3249[1b]	4822 116 52193	39Ω 5% 0,5W
3250	4822 050 11002	1k 1% 0,4W
3251	4822 050 11002	1k 1% 0,4W
3253	4822 116 52211	150Ω 5% 0,5W
3254	4822 116 52211	150Ω 5% 0,5W
3255	4822 050 11002	1k 1% 0,4W
3256	4822 050 11002	1k 1% 0,4W
3257	4822 051 10334	330k 2% 0,25W
3258	4822 051 10334	330k 2% 0,25W
3259	4822 051 10334	330k 2% 0,25W
3260	4822 051 10334	330k 2% 0,25W
3261	4822 116 80747	75Ω 5% 0,125W
3262	4822 116 80747	75Ω 5% 0,125W
3263	4822 051 10008	jumper
3263[1b]	4822 051 10562	5k6 2% 0,25W
3264	4822 051 10008	jumper
3264[1b]	4822 051 10562	5k6 2% 0,25W
3265	4822 050 21008	1Ω 1% 0,6W
3266	4822 050 21008	1Ω 1% 0,6W
3267	4822 051 10103	10k 2% 0,25W
3268	4822 051 10103	10k 2% 0,25W
3300	4822 051 10822	8k2 2% 0,25W
3301	4822 051 10272	2k7 2% 0,25W
3302	4822 051 20222	2k2 5% 0,1W
3303[7,8]	4822 051 10122	1k2 2% 0,25W
3303	4822 051 10332	3k3 2% 0,25W
3304	4822 051 10182	1k8 2% 0,25W
3305	4822 051 10431	430Ω 2% 0,25W
3306	4822 051 10103	10k 2% 0,25W
3307[2,4]	4822 051 10681	680Ω 2% 0,25W
3307[1,3]	4822 051 10821	820Ω 2% 0,25W
3308	4822 051 10331	330Ω 2% 0,25W
3309	4822 051 10331	330Ω 2% 0,25W
3310	4822 051 10512	5k1 2% 0,25W
3311	4822 051 10391	390Ω 2% 0,25W
3312	4822 101 11186	470Ω 30% 0.1W
3313[7,8]	4822 051 10103	10k 2% 0,25W
3313	4822 051 10682	6k8 2% 0,25W
3314	4822 051 10103	10k 2% 0,25W
3318	4822 051 10472	4k7 2% 0,25W
3323	4822 116 52272	330k 5% 0,5W
3325	4822 051 10271	270Ω 2% 0,25W
3326	4822 051 10271	270Ω 2% 0,25W
3327	4822 050 11202	1k2 1% 0,4W
3328	4822 051 10473	47k 2% 0,25W
3330	4822 051 10109	10Ω 2% 0,25W
3331	4822 051 10109	10Ω 2% 0,25W
3332	4822 050 23901	390Ω 1% 0,6W
3334	4822 050 21809	18Ω 1% 0,6W
3335	4822 116 52184	18Ω 5% 0,5W
3336▲[2,4]	4822 052 10189	18Ω 5% 0,33W
3336▲[1,3]	4822 052 10279	27Ω 5% 0,33W
3337▲[2,4]	4822 052 10189	18Ω 5% 0,33W
3337▲[1,3]	4822 052 10279	27Ω 5% 0,33W
3338	4822 050 11002	1k 1% 0,4W
3339	4822 116 52243	1k5 5% 0,5W
3340	4822 050 11002	1k 1% 0,4W
3341	4822 051 10103	10k 2% 0,25W
3342[2,4]	4822 051 10102	1k 2% 0,25W
3342[1,3]	4822 051 10122	1k2 2% 0,25W
3343	4822 051 10104	100k 2% 0,25W
3344	4822 051 10103	10k 2% 0,25W
3347	4822 116 52219	330Ω 5% 0,5W
3348	4822 116 52219	330Ω 5% 0,5W
3349	4822 116 52219	330Ω 5% 0,5W
3350	4822 050 11002	1k 1% 0,4W
3351	4822 116 52263	2k7 5% 0,5W
3352	4822 116 52263	2k7 5% 0,5W
3353	4822 116 52263	2k7 5% 0,5W
3354	4822 051 10221	220Ω 2% 0,25W
3357	4822 051 10102	1k 2% 0,25W
3358	4822 051 10331	330Ω 2% 0,25W
3359	4822 051 10331	330Ω 2% 0,25W
3360	4822 051 10102	1k 2% 0,25W
3361	4822 051 10102	1k 2% 0,25W
3362	4822 051 10472	4k7 2% 0,25W
3365	4822 116 52272	330k 5% 0,5W
3366	4822 116 52297	68k 5% 0,5W
3367	4822 116 52175	100Ω 5% 0,5W
3368	4822 116 52175	100Ω 5% 0,5W
3369	4822 116 52175	100Ω 5% 0,5W
3370	4822 051 10472	4k7 2% 0,25W
3371	4822 051 10332	3k3 2% 0,25W

Main carrier

3372	4822 051 10472	4k7 2% 0,25W
3373	4822 051 10102	1k 2% 0,25W
3374	4822 050 22702	27k 1% 0,6W
3375	4822 051 10331	330Ω 2% 0,25W
3376	4822 051 10331	330Ω 2% 0,25W
3380	4822 051 10101	100Ω 2% 0,25W
3381	4822 051 10101	100Ω 2% 0,25W
3394	4822 051 10683	68k 2% 0,25W
3395	4822 051 10683	68k 2% 0,25W
3450	4822 116 52238	12k 5% 0,5W
3451	4822 116 52175	100Ω 5% 0,5W
3452	4822 116 52175	100Ω 5% 0,5W
3455	4822 051 10102	1k 2% 0,25W
3456	4822 051 10682	6k8 2% 0,25W
3457	4822 101 11191	10k 30%LIN 0.1W
3458	4822 051 10303	30k 2% 0,25W
3459	4822 051 10823	82k 2% 0,25W
3460	4822 051 10333	33k 2% 0,25W
3461	4822 101 11193	470k 30% 0.1W
3463	4822 116 52251	18k 5% 0,5W
3464	4822 051 10123	12k 2% 0,25W
3465	4822 051 10394	390k 2% 0,25W
3466	4822 051 10681	680Ω 2% 0,25W
3467[3,4]	4822 050 21205	1M2 1% 0,6W
3467[1,2]	4822 116 80692	2M2 5% 0,2W
3468	4822 051 10682	6k8 2% 0,25W
3469	4822 051 10229	22Ω 2% 0,25W
3470	4822 116 52231	820Ω 5% 0,5W
3471[1,2]	4822 116 52239	120k 5% 0,5W
3471[4]	4822 116 52245	150k 5% 0,5W
3471[3]	4822 116 52258	220k 5% 0,5W
3473	4822 116 52265	270k 5% 0,5W
3474	4822 051 10392	3k9 2% 0,25W
3475	4822 051 10184	180k 2% 0,25W
3476	4822 051 10683	68k 2% 0,25W
3477	4822 051 10474	470k 2% 0,25W
3478	4822 051 10393	39k 2% 0,25W
3483	4822 051 10479	47Ω 2% 0,25W
3485	4822 051 20222	2k2 5% 0,1W
3501[3]	4822 051 10101	100Ω 2% 0,25W
3501[1,2]	4822 051 10759	75Ω 2% 0,25W
3501[4]	4822 051 10829	82Ω 2% 0,25W
3502[1,2]	4822 053 10122	1k2 5% 1W
3502[3,4]	4822 053 10272	2k7 5% 1W
3503▲[1,2]	4822 052 10128	1Ω2 5% 0,33W
3503▲[3,4]	4822 052 10478	4Ω7 5% 0,33W
3504	4822 100 11684	100Ω 10% 0.1W
3505	4822 051 10471	470Ω 2% 0,25W
3506	4822 116 52242	130k 5% 0,5W
3507[1,2]	4822 116 52233	10k 5% 0,5W
3507[3,4]	4822 116 52238	12k 5% 0,5W
3508	4822 051 10228	2Ω2 5% 0,25W
3509	4822 051 10228	2Ω2 5% 0,25W
3510	4822 051 10228	2Ω2 5% 0,25W
3511	4822 051 10228	2Ω2 5% 0,25W
3513	4822 050 25601	560Ω 1% 0,6W
3514	4822 051 10182	1k8 2% 0,25W
3515	4822 051 10228	2Ω2 5% 0,25W
3516	4822 101 11192	22k 30% 0.1W
3517	4822 051 10228	2Ω2 5% 0,25W
3519	4822 051 10228	2Ω2 5% 0,25W
3523	4822 051 10228	2Ω2 5% 0,25W
3529	4822 051 10228	2Ω2 5% 0,25W
3535[3,4]	4822 051 10151	150Ω 2% 0,25W
3535[1]	4822 051 10221	220Ω 2% 0,25W
3535[2]	4822 051 51201	120Ω 1% 0,25W
3539[3,4]	4822 053 20434	430k 5% 0,25W
3539[1,2]	4822 053 20684	680k 5% 0,25W
3540	4822 051 51201	120Ω 1% 0,25W
3542	4822 050 28201	820Ω 1% 0,6W
3543	4822 051 10101	100Ω 2% 0,25W
3545[2]	4822 111 70178	120Ω 5% 5W
3545[1]	4822 113 80565	180Ω 5% 5W
3545[3,4]	4822 116 83686	680Ω 5% 5W
3549	4822 116 52251	18k 5% 0,5W
3550	4822 116 52251	18k 5% 0,5W
3551	4822 050 25601	560Ω 1% 0,6W
3552	4822 050 25601	560Ω 1% 0,6W
3553▲	4822 052 10561	560Ω 5% 0,33W
3560[2]	4822 116 52247	16k 5% 0,5W
3560[1]	4822 116 52254	20k 5% 0,5W
3560[4]	4822 116 52274	36k 5% 0,5W
3560[3]	4822 116 52277	39k 5% 0,5W
3570▲	4822 052 10688	6Ω8 5% 0,33W
3582	4822 050 25601	560Ω 1% 0,6W
3585▲	4822 052 10159	15Ω 5% 0,33W
3588▲	4822 052 10561	560Ω 5% 0,33W
3589	4822 050 21502	1k5 1% 0,6W
3590	4822 116 52234	100k 5% 0,5W
3591	4822 051 10474	470k 2% 0,25W
3592	4822 051 10681	680Ω 2% 0,25W
3603▲	4822 053 21915	9M1 5% 0,5W
3604	4822 113 80593	1,5Ω 10% 5W
3605▲	4822 052 10102	1k 5% 0,33W
3606▲	4822 052 10102	1k 5% 0,33W
3610▲[1,2]	4822 052 10159	15Ω 5% 0,33W
3610▲[3,4]	4822 052 10688	6Ω8 5% 0,33W
3617	4822 116 52213	180Ω 5% 0,5W
3619	4822 116 52182	15Ω 5% 0,5W
3620	4822 053 12121	120Ω 5% 3W
3621[1,2]	4822 053 12279	27Ω 5% 3W
3621[3,4]	4822 053 12479	47Ω 5% 3W
3622	4822 053 12479	47Ω 5% 3W
3624	4822 053 10334	330k 5% 1W
3625	4822 116 52292	560k 5% 0,5W
3626	4822 113 80565	180Ω 5% 5W
3628	4822 051 10334	330k 2% 0,25W
3629	4822 051 10682	6k8 2% 0,25W
3631[3,4]	4822 050 21204	120k 1% 0,6W
3631[1,2]	4822 050 22204	220k 1% 0,6W
3634[3,4]	4822 116 52263	2k7 5% 0,5W
3634[1,2]	4822 116 52269	3k3 5% 0,5W
3635	4822 101 11187	1k 30%LIN 0,1W
3636	4822 051 10224	220k 2% 0,25W
3637	4822 116 52175	100Ω 5% 0,5W
3647[1b]	4822 050 23303	33k 1% 0,6W
3647	4822 050 23603	36k 1% 0,6W
3648	4822 051 10273	27k 2% 0,25W
3649	4822 050 23309	33Ω 1% 0,6W
3658▲	4822 052 10688	6Ω8 5% 0,33W
3659	4822 051 10181	180Ω 2% 0,25W
3660	4822 051 10101	100Ω 2% 0,25W
3661	4822 051 10361	360Ω 2% 0,25W
3662	4822 051 10221	220Ω 2% 0,25W
3663	4822 051 10562	5k6 2% 0,25W
3664	4822 051 10272	2k7 2% 0,25W
3665	4822 051 10103	10k 2% 0,25W
3666	4822 051 10102	1k 2% 0,25W
3667	4822 051 10361	360Ω 2% 0,25W
3668	4822 051 10102	1k 2% 0,25W
3669	4822 051 10102	1k 2% 0,25W
3670	4822 051 10303	30k 2% 0,25W
3671	4822 050 11002	1k 1% 0,4W
3672	4822 051 10103	10k 2% 0,25W
3673	4822 051 10472	4k7 2% 0,25W
3674	4822 051 10102	1k 2% 0,25W
3675[1,2]	4822 116 52239	120k 5% 0,5W
3675[3,4]	4822 116 52284	47k 5% 0,5W
3676	4822 051 10103	10k 2% 0,25W
3677	4822 051 10118	1Ω1 5% 0,25W
3701	4822 051 10273	27k 2% 0,25W
3702	4822 051 10153	15k 2% 0,25W
3707	4822 051 10182	1k8 2% 0,25W
3718	4822 116 52215	220Ω 5% 0,5W
3719	4822 116 52215	220Ω 5% 0,5W
3720	4822 116 52215	220Ω 5% 0,5W
3721	4822 051 10103	10k 2% 0,25W
3722	4822 051 10103	10k 2% 0,25W
3723	4822 051 10103	10k 2% 0,25W
3724	4822 051 10103	10k 2% 0,25W
3725	4822 051 10103	10k 2% 0,25W
3726	4822 051 10103	10k 2% 0,25W
3727	4822 116 52175	100Ω 5% 0,5W
3728	4822 116 52175	100Ω 5% 0,5W
3729	4822 051 10911	910Ω 2% 0,25W
3730	4822 051 10221	220Ω 2% 0,25W
3732[1,2]	4822 053 11103	10k 5% 2W
3732[3,4]	4822 053 11332	3k3 5% 2W
3733[3,4]	4822 050 23902	3k9 1% 0,6W
3733[1,2]	4822 116 52283	4k7 5% 0,5W
3734[3,4]	4822 050 23902	3k9 1% 0,6W
3734[1,2]	4822 116 52283	4k7 5% 0,5W
3736	4822 116 52175	100Ω 5% 0,5W
3737	4822 050 11002	1k 1% 0,4W
3741	4822 051 10123	12k 2% 0,25W
3742	4822 051 10332	3k3 2% 0,25W
3743	4822 051 10472	4k7 2% 0,25W
3747	4822 051 10273	27k 2% 0,25W
3748	4822 051 10273	27k 2% 0,25W
3749	4822 051 10273	27k 2% 0,25W
3750	4822 051 10273	27k 2% 0,25W
3751	4822 051 10153	15k 2% 0,25W
3752	4822 116 52244	15k 5% 0,5W
3753	4822 051 10153	15k 2% 0,25W
3754	4822 051 10153	15k 2% 0,25W
3755[1b]	4822 051 10008	jumper
3755	4822 051 10101	100Ω 2% 0,25W
3756	4822 051 10101	100Ω 2% 0,25W
3757	4822 051 20222	2k2 5% 0,1W
3758	4822 051 10392	3k9 2% 0,25W
3759	4822 116 52175	100Ω 5% 0,5W
3768	4822 051 10105	1M 5% 0,25W
3770	4822 051 10473	47k 2% 0,25W
3771	4822 116 52251	18k 5% 0,5W
3772	4822 116 52276	3k9 5% 0,5W
3775	4822 051 10101	100Ω 2% 0,25W
3776	4822 051 10562	5k6 2% 0,25W
3777	4822 116 52264	27k 5% 0,5W
3778	4822 116 52291	56k 5% 0,5W
3779	4822 116 52233	10k 5% 0,5W
3780	4822 051 10103	10k 2% 0,25W
3781	4822 051 10472	4k7 2% 0,25W
3849	4822 116 52218	300Ω 5% 0,5W
3850	4822 116 52189	30Ω 5% 0,5W
3851	4822 116 80747	75Ω 5% 0,125W
3852	4822 116 80747	75Ω 5% 0,125W
3853	4822 116 80747	75Ω 5% 0,125W
3854	4822 116 80747	75Ω 5% 0,125W
3855	4822 116 52201	75Ω 5% 0,5W
3856	4822 051 10101	100Ω 2% 0,25W
3857	4822 051 10331	330Ω 2% 0,25W
3858	4822 051 10331	330Ω 2% 0,25W
3859	4822 051 10331	330Ω 2% 0,25W
3860	4822 116 80176	1Ω 5% 0,5W
3861	4822 051 10562	5k6 2% 0,25W
3866	4822 051 10472	4k7 2% 0,25W
3867	4822 116 80747	75Ω 5% 0,125W
3868	4822 116 80747	75Ω 5% 0,125W
3869	4822 116 52175	100Ω 5% 0,5W
3870	4822 051 10103	10k 2% 0,25W

Spare parts list / Stückliste / Liste

Main carrier

3871	4822 116 52175	100Ω 5% 0,5W
3872	4822 051 10102	1k 2% 0,25W
3874	4822 050 21008	1Ω 1% 0,6W
3875	4822 051 10154	150k 2% 0,25W
3879	4822 051 10122	1k2 2% 0,25W
3880	4822 051 10332	3k3 2% 0,25W
3881	4822 116 52217	270Ω 5% 0,5W
3882	4822 116 52217	270Ω 5% 0,5W
3884	4822 051 10681	680Ω 2% 0,25W
3885	4822 051 10821	820Ω 2% 0,25W
3886	4822 051 10472	4k7 2% 0,25W
3887	4822 116 52207	1k2 5% 0,5W
3888	4822 116 52289	5k6 5% 0,5W
3890	4822 051 10103	10k 2% 0,25W
9723	4822 116 52234	100K 5% 0,5W

Jumper

4221.. 4318	4822 051 10008	jumper
4319	4822 051 10152	1k5 2% 0,25W
4320.. 4329	4822 051 10008	jumper
4330	4822 051 10102	1k 2% 0,25W
4450.. 4867	4822 051 10008	jumper

5001	4822 157 60138	47µH
5240	4822 158 10551	27µH
5242	4822 158 10551	27µH
5301	4822 157 63075	7,95µH
5303	4822 157 53906	47µH
5304	4822 157 63074	7.6µH 4.3MHz
5306	4822 320 40081	470ns
5534▲[3,4]	4822 157 62771	coil
5534▲[1,2]	4822 158 10728	coil
5541▲	4822 157 63078	line driver
5545▲[2]	4822 140 10414	LOT 25"/28" BL
5545▲[1]	4822 140 10417	LOT 25"/28" BM
5545▲[3]	4822 140 10418	LOT 21" MN
5545▲[4]	4822 140 10435	LOT 21" NN
5549	4822 157 53069	coil balance
5554▲	4822 157 63079	AT4042/97
5554▲[3]	4822 157 63161	AT4042/90G
5582	5322 157 52539	15µH
5588	4822 157 52505	33µH
5605▲	4822 157 53995	100µH
5606▲	4822 157 53995	100µH
5619[1,2]	4822 156 21125	3,9µH
5619[3,4]	4822 157 51235	4µH 7 10%
5625▲[3,4]	4822 148 81159	SOPS trafo
5625▲[1,2]	4822 148 81168	SOPS trafo
5630	4822 157 60387	1µH
5631	4822 158 10551	27µH
5632	4822 158 10551	27µH
5661	4822 157 52279	33µH 10%
5701	4822 157 52843	56µH 5%
5703	4822 157 52279	33µH 10%

6245	4822 130 30621	1N4148
6246	4822 130 81139	LLZ-C3V3
6247	4822 130 81139	LLZ-C3V3
6248	4822 130 80446	LL4148
6249	4822 130 80446	LL4148
6300	4822 130 80446	LL4148
6302	4822 130 34382	BZX79-C8V2
6303	4822 130 34382	BZX79-C8V2
6310	4822 130 80884	LLZ-C5V1
6315	4822 130 80446	LL4148
6316	4822 130 30621	1N4148
6317	4822 130 30621	1N4148
6318	4822 051 10008	jumper
6319	4822 130 34379	BZX79-C27
6320	4822 130 80877	BAV103
6367	4822 130 80884	LLZ-C5V1
6464	4822 130 81015	LLZ-C10
6465[3,4]	4822 130 34281	BZX79-F15
6465[1]	4822 130 61219	BZX79-F10
6465[2]	4822 130 80239	BZX79-F8V2
6466	4822 130 80446	LL4148
6467	4822 130 80446	LL4148
6503	4822 130 42488	BYD33D
6504	4822 130 80446	LL4148
6546	4822 130 41275	BY228/20
6547	4822 130 41602	BYW95C/20
6548	4822 130 30621	1N4148
6551	4822 130 42489	BYD33G
6560	4822 130 80446	LL4148
6561	4822 130 30864	BZX79-C68
6563	4822 130 80915	BYD74C
6570	4822 130 42489	BYD33G
6571	4822 130 42488	BYD33D
6580	4822 130 80791	BYV28-200/20
6580[2]	4822 130 82512	BYV29F-400
6585	4822 130 42489	BYD33G
6590	4822 130 81141	LLZ-C43
6591	4822 130 30621	1N4148
6592	4822 130 80928	BZX79-C30
6610	4822 130 80446	LL4148
6611	5322 130 34413	BZT03-C16
6612	4822 130 30621	1N4148
6617	4822 130 31456	BZV85-C5V1
6621	4822 130 42488	BYD33D
6622	4822 130 30621	1N4148
6624	4822 130 31933	1N5061
6625	4822 130 31933	1N5061
6630[1,2]	4822 130 33531	BY229F-600
6630[3,4]	4822 130 81175	BYD74G
6640	4822 130 80914	BYD74B
6641	4822 130 80914	BYD74B
6646	4822 130 42488	BYD33D
6648[1,2]	4822 130 34488	BZX79-F12
6648[3,4]	4822 130 61219	BZX79-F10
6649	4822 130 30621	1N4148
6660	4822 130 30621	1N4148
6661	4822 130 42488	BYD33D
6662	4822 130 80905	LLZ-F5V1
6663	4822 130 34281	BZX79-F15
6664[3,4]	4822 130 30862	BZX79-F9V1
6664[1,2]	4822 130 61219	BZX79-F10
6665	4822 130 80883	LLZ-C4V7
6666[1,2]	4822 130 80887	LLZ-C36
6666[3,4]	4822 130 81141	LLZ-C43
6669	4822 130 80446	LL4148
6670	4822 130 20272	E0102AA
6675	4822 130 80914	BYD74B
6705	4822 130 80905	LLZ-F5V1
6707	4822 209 72895	TLUV5320
6708	4822 130 81145	LLZ-F2V4
6709	4822 130 82037	HZT33

7003	4822 130 42133	BC817
7240[1b]	4822 209 73253	TDA2613/N1
7240	4822 209 73853	TDA1521/N4
7243	5322 130 42012	BC858
7244	4822 130 42513	BC858C
7245	5322 130 42136	BC848C
7246	5322 130 42136	BC848C
7247	5322 130 42136	BC848C
7248	4822 130 61207	BC848
7249	4822 130 61207	BC848
7301	4822 130 61207	BC848
7302	5322 130 42012	BC858
7303	4822 130 61207	BC848
7305	4822 209 30389	TDA4510/V8
7306	4822 209 30837	TDA4650/V4/S1
7307	4822 209 31216	TDA4661
7308	4822 209 71512	TDA4565/V6
7309	4822 209 63733	TDA4680/V5
7310	4822 130 61207	BC848
7311	5322 209 10576	4053B
7312	5322 209 10576	4053B
7341	4822 130 61207	BC848
7370	4822 130 61207	BC848
7371	4822 130 61207	BC848
7372	4822 130 61207	BC848
7373	4822 130 61207	BC848
7374	4822 130 61207	BC848
7455	5322 130 42012	BC858
7470	4822 209 63423	TDA2579B/N2
7471	4822 130 61207	BC848
7472	5322 130 42136	BC848C
7500	4822 130 41344	BC337-40
7502	4822 130 60775	2SD1266P
7503	4822 130 61236	BD234
7504	4822 130 61207	BC848
7505	5322 130 42012	BC858
7540	4822 130 41344	BC337-40
7545[3,4]	4822 130 61265	BU508AF
7546[3]	4822 130 42679	BUT11AF/1
7546[4]	4822 130 62735	BUT12AF
7591	5322 130 42012	BC858
7600	4822 209 63735	TDA8385/N2
7614▲	4822 209 30992	CNR50
7625	4822 130 62735	BUT12AF
7661	5322 130 44921	BD943
7663	4822 130 42513	BC858C
7671	4822 130 61207	BC848
7672	4822 130 61207	BC848
7703	4822 130 61207	BC848
7704	4822 130 61207	BC848
7705	4822 130 61207	BC848
7706	4822 130 61207	BC848
7707	4822 130 61207	BC848
7708	4822 209 31209	UP GR2STL1-5.2
7708	4822 209 31211	UP GR2STL2-5.2
7708	4822 209 31212	UP GR2STL3-1.0
7708	4822 209 31213	UP GR2M1/2-5.1
7710	4822 209 62098	ST24C02AB1
7850	4822 130 61207	BC848
7885	4822 130 61207	BC848
7886	4822 130 61207	BC848

1)	25"/28" Black Matrix
1b)	Black Matrix mono
2)	25"/28" Black Line
3)	21" Mini Neck
4)	21" Narrow Neck
7)	system BG
8)	system I

L1 = English, German, French, Italian, Dutch, Portugues
L2 = English, Finnish, Danish, Swedish, Norvegian, Spanish
L3 = English, German, French, Hungarian, Csech, Russian
M1/2 = L1 + L2

Spare parts list / Stückliste / Liste

Mains module

	4822 212 23664	mains module

Mechanical parts

0010⚠	4822 265 30389	2p male
0032⚠	4822 265 30389	2p male
0033⚠	4822 265 30877	3p male

2601⚠	4822 121 40487	100nF 10% 400V
2602	4822 126 11141	2,2nF 10% 1KV
2604	4822 126 11141	2,2nF 10% 1kV

3601⚠	4822 116 40211	PTC/NTC
3607	4822 050 23901	390Ω 1% 0,6W

5600⚠	4822 157 63073	filter

6602	4822 130 31933	1N5061
6603	4822 130 31933	1N5061
6604	4822 130 31933	1N5061
6605	4822 130 31933	1N5061

CRT module

[1]	4822 212 30057	CRT Black Matrix
[2]	4822 212 30058	CRT Black Line
[3]	4822 212 30059	CRT Mini Neck
[4]	4822 212 30061	CRT Narrow Neck

Mechanical parts

0017	4822 290 40283	5p male
0018	4822 267 40878	3p male
0019	4822 265 30378	4p male
0020	4822 290 40295	7p male
0021[3]	4822 255 70251	CRT socket
0021	4822 255 70261	CRT socket
	4822 320 20188	focus cable
	4822 267 31168	3p female
	4822 267 50824	4p female
	4822 265 40252	7p female
	4822 290 40287	5p female
	4822 492 70871	spring

2301[4]	4822 122 31769	18pF 5% 50V
2301	4822 122 32482	22pF 5% 63V
2301[2]	4822 126 10324	33pF 63V
2331[1]	4822 122 31769	18pF 5% 50V
2331[2]	4822 122 31825	27pF 10% 50V
2331[3]	4822 122 32482	22pF 5% 63V
2331[4]	4822 122 32504	15pF 5% 50V
2344[3]	4822 124 21208	4,7µF 20% 50V
2344	4822 124 40246	4,7µF 20% 63V
2361[3]	4822 122 31769	18pF 5% 50V
2361[2]	4822 122 31825	27pF 10% 50V
2361[4]	4822 122 32139	12pF 5% 63V
2361[1]	4822 122 32504	15pF 5% 50V
2391	4822 121 43878	27pF 2% 500V
2411	4822 124 80057	330µF 20% 16V
2421	4822 122 32482	22pF 5% 63V
2431	4822 121 41689	100nF 10% 250V
2432[3]	4822 124 80056	47µF 20% 16V
2432	5322 124 41381	22µF 20% 50V
2433	5322 121 50885	33nF 5% 1KV
2434	5322 122 32334	220pF 10% 100V
2520	5322 124 41299	68µF 20% 25V
2521	4822 122 32891	68nF 10% 63V
2522	5322 121 42661	330nF 5% 63V
2523	4822 122 33105	56nF 10% 63V
2526[2]	4822 122 32856	8,2nF 10% 63V
2526[1]	5322 122 31648	12nF 10% 50V
2531[4]	4822 121 42408	220nF 5% 63V
2531	4822 121 43396	120nF 5% 63V
2532	4822 124 80066	1µF 20% 63V
2532[4]	4822 124 80067	4,7µF 20% 63V
2533	4822 124 40242	1µF 20% 63V

3301	4822 051 10131	130Ω 2% 0,25W
3302	4822 051 10362	3k6 2% 0,25W
3302[2]	4822 051 20222	2k2 5% 0,1W
3303	4822 051 10272	2k7 2% 0,25W
3304	4822 116 52239	120k 5% 0,5W
3304	4822 116 52239	120k 5% 0,5W
3309	4822 051 10118	1Ω1 5% 0,25W
3309[2]	4822 051 10479	47Ω 2% 0,25W
3310	4822 116 52219	330Ω 5% 0,5W
3311[2]	4822 053 12123	12k 5% 3W
3311	4822 053 12153	15k 5% 3W
3312	4822 052 10271	270Ω 5% 0,33W
3313	4822 052 10271	270Ω 5% 0,33W
3314	4822 050 21502	1k5 1% 0,6W
3315	4822 051 10124	120k 2% 0,25W
3316	4822 051 10124	120k 2% 0,25W
3331	4822 051 10131	130Ω 2% 0,25W
3332	4822 051 10362	3k6 2% 0,25W
3332[2]	4822 051 20222	2k2 5% 0,1W
3333[3]	4822 051 10272	2k7 2% 0,25W
3333	4822 116 52263	2k 7 5% 0,5W
3334	4822 116 52239	120k 5% 0,5W
3338	4822 051 10118	1Ω1 5% 0,25W
3338[3]	4822 051 10479	47Ω 2% 0,25W
3340	4822 116 52219	330Ω 5% 0,5W
3341	4822 053 12153	15k 5% 3W
3342	4822 052 10271	270Ω 5% 0,33W
3343	4822 052 10271	270Ω 5% 0,33W
3344	4822 050 21502	1k5 1% 0,6W
3345	4822 051 10681	680Ω 2% 0,25W
3361	4822 116 52208	130Ω 5% 0,5W
3362	4822 051 10362	3k6 2% 0,25W
3362[2]	4822 051 20222	2k2 5% 0,1W
3363	4822 051 10272	2k7 2% 0,25W
3364	4822 051 10223	22k 2% 0,25W
3368	4822 051 10118	1Ω1 5% 0,25W
3368[2]	4822 051 10479	47Ω 2% 0,25W
3370	4822 116 52219	330Ω 5% 0,5W
3371[2]	4822 053 12103	10k 5% 3W
3371	4822 053 12153	15k 5% 3W
3372	4822 052 10271	270Ω 5% 0,33W
3373	4822 052 10271	270Ω 5% 0,33W
3374	4822 050 21502	1k5 1% 0,6W
3382[2]	4822 051 10392	3k9 2% 0,25W
3382	4822 051 10432	4k3 2% 0,25W
3383	4822 116 52284	47k 5% 0,5W
3384	4822 116 52277	39k 5% 0,5W
3385	4822 051 10104	100k 2% 0,25W
3391	4822 116 52234	100k 5% 0,5W
3392	4822 051 10103	10k 2% 0,25W
3395	4822 051 10122	1k2 2% 0,25W
3396	4822 051 10124	120k 2% 0,25W
3397	4822 051 10124	120k 2% 0,25W
3411	4822 116 52249	1k 8 5% 0,5W
3413	4822 116 52218	300Ω 5% 0,5W
3414	4822 051 10519	51Ω 2% 0,25W
3415	4822 116 52218	300Ω 5% 0,5W
3421[3]	4822 051 10104	100k 2% 0,25W
3421	4822 051 10184	180k 2% 0,25W
3422	4822 051 10682	6k8 2% 0,25W
3423	4822 051 10105	1M 5% 0,25W
3431	4822 052 10181	180Ω 5% 0,33W
3431[4]	4822 052 10271	270Ω 5% 0,33W
3432	4822 052 10399	39Ω 5% 0,33W
3433	4822 052 10108	1Ω 5% 0,33W
3434	4822 050 21502	1k5 1% 0,6W
3435	4822 050 21502	1k5 1% 0,6W
3436	4822 050 21805	1M 8 1% 0,6W
3442	4822 116 52239	120k 5% 0,5W
3443	4822 051 10272	2k7 2% 0,25W
3446	4822 051 10683	68k 2% 0,25W
3447	4822 051 10152	1k5 2% 0,25W
3448	4822 051 10152	1k5 2% 0,25W
3449	4822 051 10333	33k 2% 0,25W
3449[2]	4822 051 10393	39k 2% 0,25W
3512[2]	4822 051 10109	10Ω 2% 0,25W
3512[1]	4822 051 10181	180Ω 2% 0,25W
3518[2]	4822 051 10101	100Ω 2% 0,25W
3518[1]	4822 051 10152	1k5 2% 0,25W
3520[1]	4822 116 52207	1k 2 5% 0,5W
3520[2]	4822 116 52211	150Ω 5% 0,5W
3521	4822 101 20902	4k 7 10% 0,05W
3522	4822 051 10152	1k5 2% 0,25W
3524	4822 051 10683	68k 2% 0,25W

Spare parts list / Stückliste / Liste

CRT module

3525[4]	4822 100 20169	10k 10% 0,05W
3525	4822 100 20644	22k 10% 0.05W
3526	4822 051 10125	1M 2 5% 0,25W
3526[4]	4822 051 10563	56k 2% 0,25W
3527[1]	4822 051 10104	100k 2% 0,25W
3527[3]	4822 051 10563	56k 2% 0,25W
3527[2]	4822 051 10823	82k 2% 0,25W
3528[3,4]	4822 051 10681	680Ω 2% 0,25W
3528	4822 051 20222	2k2 5% 0,1W
3529	4822 051 10008	jumper
3529[3,4]	4822 051 10102	1k 2% 0,25W
3530[4]	4822 051 10008	jumper
3530	4822 051 10102	1k 2% 0,25W
3531[4]	4822 051 10008	jumper
3531	4822 051 10104	100k 2% 0,25W
3532	4822 051 10103	10k 2% 0,25W
3533	4822 116 52303	8k 2 5% 0,5W
3534	4822 052 10828	8Ω2 5% 0,33W
3571	4822 051 10273	27k 2% 0,25W
3572	4822 051 10153	15k 2% 0,25W
3575	4822 051 10182	1k8 2% 0,25W
3576[4]	4822 051 10101	100Ω 2% 0,25W
3576[1]	4822 051 10151	150Ω 2% 0,25W
3576[2]	4822 051 51201	120Ω 1% 0,25W
3578	4822 116 52245	150k 5% 0,5W
3580	4822 051 10103	10k 2% 0,25W

Jumper

4001	4822 051 10008	jumper
4002	4822 051 10008	jumper

5401[2,3]	4822 156 20915	33µH
5401[4]	4822 157 63788	18µH 10%
5401[1]	4822 158 10563	82µH 7.5%
5530	4822 152 20559	

6301	4822 130 80877	BAV103
6331	4822 130 80877	BAV103
6345	4822 130 81015	LLZ-C10
6361	4822 130 80877	BAV103
6382	4822 130 80877	BAV103
6411	4822 130 32831	BZX79-F3V0
6421	4822 130 80446	LL4148
6519	4822 130 80446	LL4148

7302[1,2]	4822 130 41773	BF869
7302[3,4]	4822 130 41782	BF422
7303	4822 130 61207	BC848
7304	4822 130 41782	BF422
7305	4822 130 41646	BF423
7331[1,2]	4822 130 41773	BF869
7331[3,4]	4822 130 41782	BF422
7333	4822 130 61207	BC848
7334	4822 130 41782	BF422
7335	4822 130 41646	BF423
7345	5322 130 42012	BC858
7361[1,2]	4822 130 41773	BF869
7361[3,4]	4822 130 41782	BF422
7363	4822 130 61207	BC848
7364	4822 130 41782	BF422
7365	4822 130 41646	BF423
7383	4822 130 41782	BF422
7391	4822 130 41646	BF423
7402▲	5322 130 41982	BC848B
7411	4822 130 40938	BC548
7421	4822 130 42513	BC858C
7530▲[3]	4822 130 61207	BC848
7530	5322 130 41982	BC848B
7533	4822 130 60111	2SA1359
7534	4822 130 44283	BC636
7536▲	5322 130 41982	BC848B
7537	5322 130 41982	BC848B
7538▲	5322 130 41982	BC848B

1) 25"/28" Black Matrix
2) 25"/28" Black Line
3) 21" Mini Neck
4) 21" Narrow Neck

Euro module

15	4822 212 30074	Euro module ECO
16	4822 212 30075	Euro module PIP

Mechanical parts

0023	4822 265 40442	10p male
0026	4822 265 40442	10p male
0030	4822 265 41086	9p male
0032	4822 267 40666	3p male
0048	4822 267 60247	euro connector
0100	4822 256 91879	holder
0050	4822 267 51084	9p female
0051	4822 290 40285	3p female

2800	4822 121 51252	470nF 5% 63V
2801	4822 121 51252	470nF 5% 63V
2802	4822 121 51252	470nF 5% 63V
2803	4822 121 51252	470nF 5% 63V
2804	4822 122 33496	100nF 10% 63V
2805	4822 122 33496	100nF 10% 63V
2806	4822 122 33496	100nF 10% 63V
2807	4822 124 41506	47µF 20% 16V
2810	4822 122 32142	270pF 5% 63V
2811	4822 122 32142	270pF 5% 63V
2812	4822 122 33496	100nF 10% 63V
2813	4822 122 32542	47nF 10% 63V
2814	4822 122 31759	18nF
2815	4822 122 33496	100nF 10% 63V
2816	4822 122 33496	100nF 10% 63V
2817	4822 122 33496	100nF 10% 63V
2818	4822 122 33496	100nF 10% 63V
2819	4822 124 41525	100µF 20% 25V
2820	4822 121 42408	220nF 5% 63V
2821	4822 124 40433	47µF 20% 25V
2822	4822 124 40435	10µF 20% 50V
2823	4822 122 33496	100nF 10% 63V
2831	4822 124 40272	33µF 20% 16V
2833	4822 122 33496	100nF 10% 63V
2834	4822 122 33496	100nF 10% 63V

3800	4822 116 52189	30Ω 5% 0,5W
3801	4822 116 80747	75Ω 5% 0,125W
3802	4822 116 52211	150Ω 5% 0,5W
3803	4822 116 52211	150Ω 5% 0,5W
3804	4822 050 11002	1k 1% 0,4W
3805	4822 050 11002	1k 1% 0,4W
3806	4822 051 10334	330k 2% 0,25W
3807	4822 051 10334	330k 2% 0,25W
3808	4822 051 10334	330k 2% 0,25W
3809	4822 051 10334	330k 2% 0,25W
3810	4822 051 10682	6k8 2% 0,25W
3811	4822 051 20222	2k2 5% 0,1W
3812	4822 051 10331	330Ω 2% 0,25W
3813	4822 116 52201	75Ω 5% 0,5W
3814	4822 051 10152	1k5 2% 0,25W
3815	4822 051 10472	4k7 2% 0,25W
3816	4822 116 52296	6k 8 5% 0,5W
3817	4822 116 52224	470Ω 5% 0,5W
3818	4822 116 52224	470Ω 5% 0,5W
3819	4822 051 10008	jumper
3820	4822 051 10681	680Ω 2% 0,25W
3821	4822 051 10008	jumper
3822	4822 051 10681	680Ω 2% 0,25W
3823	4822 051 10331	330Ω 2% 0,25W
3824	4822 051 10331	330Ω 2% 0,25W
3825	4822 051 10223	22k 2% 0,25W
3829	4822 051 10102	1k 2% 0,25W
3830	4822 051 10683	68k 2% 0,25W
3831	4822 051 10123	12k 2% 0,25W

Euro module

3832	4822 051 10102	1k 2% 0,25W
3833	4822 051 10279	27Ω 2% 0,25W
3835[16]	4822 051 10221	220Ω 2% 0,25W
3836[15]	4822 051 10102	1k 2% 0,25W
3836	4822 051 10271	270Ω 2% 0,25W
3837	4822 052 10278	2Ω7 5% 0,33W
3838	4822 116 80747	75Ω 5% 0,125W

Jumper

4842	4822 051 10008	jumper
4844	4822 051 10008	jumper
4845	4822 051 10008	jumper
4847	4822 051 10008	jumper
4848	4822 051 10008	jumper
4849	4822 051 10008	jumper

5800	4822 157 51462	10µH

6800	4822 130 80954	LLZ-C5V6
6801	4822 130 80446	LL4148
6803	4822 130 30621	1N4148

7800	5322 130 44921	BD943
7801	5322 209 10576	4053B
7802	5322 209 10576	4053B
7820	4822 130 61207	BC848
7821	5322 130 42136	BC848C
7823	4822 130 61207	BC848
7824	5322 130 42136	BC848C

15) Non PIP
16) PIP

Mono IF/sound module

[5]	4822 212 30064	IF MONO BGDK
[6]	4822 212 30065	IF MONO BGLI
[7]	4822 212 30066	IF MONO BG
[8]	4822 212 30067	IF MONO I

Various

1010[8]	4822 242 70936	OFW31952
1010[7]	4822 242 72374	OFWG1961
1010[6]	4822 242 81156	OFWG1965
1010[5]	4822 242 81186	OFWK2954
1042[8]	4822 153 30025	6MHz
1042	4822 242 72211	5,5MHz
1043[6]	4822 153 30025	6MHz
1043[5]	4822 242 71375	6,5MHz
1043[8]	4822 242 71841	6.0MHz
1102	4822 242 70714	5,5MHz
1103[6]	4822 242 71841	6.0MHz
1103[5]	4822 242 72059	6,5MHz
1150	4822 242 81157	OFWL9453

2011	4822 124 40435	10µF 20% 50V
2012	4822 124 41577	4,7µF 20% 50V
2013	4822 122 31784	4,7nF 10% 50V
2014[6]	4822 122 31784	4,7nF 10% 50V
2014	4822 122 31797	22nF 10% 63V
2015	5322 121 42498	680nF 5% 63V
2016	4822 122 31784	4,7nF 10% 50V
2017	4822 122 33496	100nF 10% 63V
2018	4822 121 51252	470nF 5% 63V
2019	4822 122 31784	4,7nF 10% 50V
2035	4822 122 32507	6,8pF 5% 50V
2036	4822 122 31766	120pF 5% 50V
2037	4822 122 31766	120pF 5% 50V
2038	4822 122 31784	4,7nF 10% 50V
2039	4822 122 32504	15pF 5% 50V
2040	4822 122 31784	4,7nF 10% 50V
2041	4822 122 31784	4,7nF 10% 50V
2042	4822 122 32139	12pF 5% 63V
2044	4822 122 31797	22nF 10% 63V
2047	4822 122 33496	100nF 10% 63V
2048	4822 124 41506	47µF 20% 16V
2049	4822 122 33496	100nF 10% 63V
2050	4822 124 40849	330µF 20% 16V
2055	4822 122 31972	39pF 5% 50V
2056	4822 124 40435	10µF 20% 50V
2057	4822 122 31981	33nF 50V
2058	4822 122 31797	22nF 10% 63V
2059	4822 124 41566	3,3µF 20% 50V
2060	4822 122 31797	22nF 10% 63V
2080	4822 122 33464	56pF 2%
2081	4822 122 31794	180pF 2% 50V
2082	4822 122 32087	1,8pF 5% 50V
2113	4822 124 41596	22µF 20% 50V
2114	4822 122 31784	4,7nF 10% 50V
2115	4822 124 41577	4,7µF 20% 50V
2116	4822 124 40435	10µF 20% 50V
2117	4822 124 41576	2,2µF 20% 50V
2118	4822 124 40432	1500µF 20% 25V
2124	4822 122 32442	10nF 50V
2125	4822 124 40195	150µF 20% 16V
2126	4822 121 43898	8,2nF 10% 50V
2127	5322 121 42661	330nF 5% 63V
2129	5322 121 42661	330nF 5% 63V
2130	5322 121 42661	330nF 5% 63V
2131	4822 122 31797	22nF 10% 63V
2132	4822 122 31797	22nF 10% 63V
2133	4822 122 31797	22nF 10% 63V
2134	4822 124 41596	22µF 20% 50V
2135	4822 121 42408	220nF 5% 63V
2136	5322 121 42661	330nF 5% 63V
2137[7]	4822 122 31746	1000pF 5% 50V
2137	4822 126 11381	820pF 2%
2137[5]	4822 126 12075	680pF 2% 63V
2138[6]	4822 122 31771	390pF 5% 50V
2138[5]	4822 126 12154	560pF 2% 50V
2139[5]	4822 122 31771	390pF 5% 50V
2139[6]	4822 126 12155	1nF 2% 50V
2141	4822 124 41577	4,7µF 20% 50V
2143	4822 122 31797	22nF 10% 63V
2150	4822 121 42408	220nF 5% 63V
2151	4822 124 40195	150µF 20% 16V
2160	4822 122 31784	4,7nF 10% 50V

3012	4822 051 10562	5k6 2% 0,25W
3013	4822 051 10273	27k 2% 0,25W
3014	4822 051 10823	82k 2% 0,25W
3015[6]	4822 051 10104	100k 2% 0,25W
3015	4822 051 10473	47k 2% 0,25W
3016	4822 100 11819	100k 30% 0,1W
3017	4822 051 10823	82k 2% 0,25W
3019	4822 051 10473	47k 2% 0,25W
3020	4822 051 10273	27k 2% 0,25W
3021	4822 051 10223	22k 2% 0,25W
3030	4822 051 10223	22k 2% 0,25W
3031	4822 051 10474	470k 2% 0,25W
3036	4822 051 10472	4k7 2% 0,25W
3037	4822 051 10392	3k9 2% 0,25W
3038	4822 051 10472	4k7 2% 0,25W
3039	4822 051 10392	3k9 2% 0,25W
3040	4822 051 10472	4k7 2% 0,25W
3041	4822 051 10221	220Ω 2% 0,25W
3042[6]	4822 051 10101	100Ω 2% 0,25W
3042[5]	4822 051 10221	220Ω 2% 0,25W
3042	4822 051 51201	120Ω 1% 0,25W
3043	4822 116 52175	100Ω 5% 0,5W
3044	4822 051 10271	270Ω 2% 0,25W
3046	4822 051 10681	680Ω 2% 0,25W
3047	4822 051 10822	8k2 2% 0,25W
3048	4822 101 11188	2k 30%LIN 0,1W
3049	4822 051 20183	18k 5% 0,1W
3050	4822 051 10272	2k7 2% 0,25W
3051	4822 051 10563	56k 2% 0,25W
3052[5,6]	4822 051 10471	470Ω 2% 0,25W
3052[7,8]	4822 051 10561	560Ω 2% 0,25W
3055	4822 051 10103	10k 2% 0,25W
3056	4822 051 10471	470Ω 2% 0,25W
3058	4822 051 10682	6k8 2% 0,25W
3060	4822 051 10471	470Ω 2% 0,25W
3061	4822 051 10333	33k 2% 0,25W
3062	4822 051 10563	56k 2% 0,25W
3063	4822 051 10272	2k7 2% 0,25W
3064	4822 051 10563	56k 2% 0,25W
3065	4822 051 10563	56k 2% 0,25W
3066	4822 051 10824	820k 2% 0,25W
3067	4822 051 10681	680Ω 2% 0,25W
3067[6]	4822 051 20222	2k2 5% 0,1W
3068	4822 051 10392	3k9 2% 0,25W
3080[8]	4822 051 10332	3k3 2% 0,25W
3080[5]	4822 051 10472	4k7 2% 0,25W
3080[6]	4822 051 10682	6k8 2% 0,25W
3080[7]	4822 051 20222	2k2 5% 0,1W
3081	4822 051 10829	82Ω 2% 0,25W
3104	4822 052 10479	47Ω 5% 0,33W
3105	4822 053 11271	270Ω 5% 2W
3107	4822 051 10151	150Ω 2% 0,25W
3108	4822 051 10333	33k 2% 0,25W
3109	4822 051 10223	22k 2% 0,25W

Mono IF/sound module

3110	4822 051 10562	5k6 2% 0,25W
3111	4822 051 10562	5k6 2% 0,25W
3112	4822 051 10472	4k7 2% 0,25W
3113	4822 051 10562	5k6 2% 0,25W
3115	4822 051 10562	5k6 2% 0,25W
3116	4822 050 11002	1k 1% 0,4W
3117	4822 051 10104	100k 2% 0,25W
3118[5]	4822 051 10332	3k3 2% 0,25W
3118[6]	4822 051 10472	4k7 2% 0,25W
3118	4822 051 20222	2k2 5% 0,1W
3119	4822 051 10472	4k7 2% 0,25W
3120	4822 051 10472	4k7 2% 0,25W
3121	4822 051 10104	100k 2% 0,25W
3122	4822 051 10331	330Ω 2% 0,25W
3123[5,7]	4822 051 10473	47k 2% 0,25W
3123[6]	4822 051 10563	56k 2% 0,25W
3124	4822 051 10103	10k 2% 0,25W
3125	4822 051 10103	10k 2% 0,25W
3126	4822 051 10153	15k 2% 0,25W
3127	4822 051 10153	15k 2% 0,25W
3129	4822 051 10224	220k 2% 0,25W
3130	4822 051 10682	6k8 2% 0,25W
3131	4822 051 10102	1k 2% 0,25W
3132	4822 051 10392	3k9 2% 0,25W
3140	4822 051 10153	15k 2% 0,25W
3141	4822 051 10392	3k9 2% 0,25W
3142	4822 051 10273	27k 2% 0,25W
3143	4822 051 10182	1k8 2% 0,25W
3144	4822 051 10182	1k8 2% 0,25W
3150	4822 051 10103	10k 2% 0,25W
3151	4822 051 20222	2k2 5% 0,1W
3152	4822 051 10103	10k 2% 0,25W
3153	4822 051 10103	10k 2% 0,25W
3154	4822 051 10103	10k 2% 0,25W

Jumper

4010.. 4102	4822 051 10008	jumper

5010	4822 157 63081	0.56µH 20%
5010[6]	4822 157 63858	0,39µH
5035	4822 157 53534	0,34µH 5%
5036[6]	4822 157 53609	0,36µH 5%
5036	4822 157 63824	0,36µH 5% 38,9mH z
5037	4822 157 53537	1,35µH 5%
5038	4822 157 63076	1.2µH 5%
5039	4822 157 52983	2N2
5041[5]	4822 153 20251	18µH 10%
5041[6]	4822 157 52983	2N2
5041	4822 157 53001	27µH 10%
5042[7,8]	4822 152 20677	
5042[5,6]	4822 157 53634	5,6µH 10%
5080	4822 157 53539	0,27µH 5%
5105	4822 157 52511	0,83µH
5150	4822 157 62552	

6036	4822 130 80446	LL4148
6037	4822 130 80888	BA682
6038	4822 130 80888	BA682
6039	4822 130 30621	1N4148
6040	4822 130 80446	LL4148
6041	4822 130 80446	LL4148
6042	4822 130 80446	LL4148
6043	4822 130 80446	LL4148
6105	4822 130 80888	BA682
6106	4822 130 80888	BA682
6108	4822 130 80888	BA682
6112	4822 130 80884	LLZ-C5V1
6150	4822 130 80888	BA682
6151	4822 130 80888	BA682

7000	4822 209 72812	TDA2549/C4
7030	5322 130 42012	BC858
7031	4822 130 61207	BC848
7035	4822 130 44121	BC338
7040	5322 130 42012	BC858
7041	4822 130 61207	BC848
7100	4822 209 63105	TDA3843/V3
7101	4822 209 30278	TDA3827/V3
7102	4822 130 61207	BC848
7103	5322 130 42136	BC848C
7104	5322 130 41982	BC848B
7150	4822 130 61207	BC848
7151	4822 130 61207	BC848

5) system BGBK
6) system BGLI
7) system BG
8) system I

Stereo IF/sound module

[7]	4822 212 30069	IF STEREO BG
[6]	4822 212 30072	IF STEREO BGLI
[5]	4822 212 30073	IF STEREO BGDK

Various

1010[7]	4822 242 72554	OFWG3254
1010[5]	4822 242 73936	OFWK3255
1010[6]	4822 242 80205	OFWK3261
1042	4822 242 72211	5,5MHz
1101	4822 242 70485	5,74MHz
1102[6]	4822 242 71713	6,0MHz
1102[5]	4822 242 72057	6,5MHz
1103	4822 242 70714	5,5MHz
1150	4822 242 81157	OFWL9453
1200	4822 242 80208	10MHz

2011	4822 124 41506	47µF 20% 16V
2012	4822 124 41577	4,7µF 20% 50V
2013	4822 122 31784	4,7nF 10% 50V
2014	4822 122 31797	22nF 10% 63V
2015	5322 121 42498	680nF 5% 63V
2016	4822 122 31784	4,7nF 10% 50V
2017	4822 122 33496	100nF 10% 63V
2018	4822 121 51252	470nF 5% 63V
2035	4822 122 32506	5,6pF 5% 50V
2036	4822 122 31784	4,7nF 10% 50V
2037	4822 122 31784	4,7nF 10% 50V
2038	4822 122 33496	100nF 10% 63V
2039	4822 122 32083	8,2pF 5% 50V
2040	4822 122 31784	4,7nF 10% 50V
2041	4822 122 31784	4,7nF 10% 50V
2042	4822 122 32139	12pF 5% 63V
2044	4822 122 31797	22nF 10% 63V
2047	4822 122 33496	100nF 10% 63V
2048	4822 124 41506	47µF 20% 16V
2049	4822 122 33496	100nF 10% 63V
2050	4822 124 40849	330µF 20% 16V
2051	4822 122 33496	100nF 10% 63V
2055	4822 122 31972	39pF 5% 50V
2056	4822 124 41576	2,2µF 20% 50V
2057	4822 122 31981	33nF 50V
2058	4822 122 31797	22nF 10% 63V
2059	4822 124 41407	0,47µF 20% 63V
2080	4822 122 33464	56pF 2%
2081	4822 122 31794	180pF 2% 50V
2113	4822 124 40435	10µF 20% 50V
2114	4822 122 32442	10nF 50V
2115	4822 124 41509	33µF 20% 35V
2117	4822 124 41576	2,2µF 20% 50V
2118	4822 124 41576	2,2µF 20% 50V
2119	4822 122 31797	22nF 10% 63V
2120	4822 124 41576	2,2µF 20% 50V
2123	4822 124 40242	1µF 20% 63V
2123[6]	4822 124 41577	4,7µF 20% 50V
2124	4822 124 41576	2,2µF 20% 50V
2125	4822 122 10527	910pF 2% 50V
2126	4822 122 31784	4,7nF 10% 50V
2127	4822 122 31746	1000pF 5% 50V
2127[7]	4822 126 11381	820pF 2%
2127[6]	4822 126 12075	680pF 2% 63V
2128[5]	4822 122 10527	910pF 2% 50V
2128	4822 126 11381	820pF 2%
2129[6]	4822 122 31727	470pF 5% 63V
2129[5]	4822 122 33476	220pF 2% 50V
2130[6]	4822 124 40195	150µF 20% 16V
2133	4822 122 31797	22nF 10% 63V
2160	4822 122 31784	4,7nF 10% 50V
2200	4822 121 51252	470nF 5% 63V

Stereo IF/sound module

2201	4822 121 51252	470nF 5% 63V
2202	4822 121 51252	470nF 5% 63V
2203	4822 122 31916	5,6nF 10% 63V
2204	4822 121 42408	220nF 5% 63V
2205	4822 122 31947	100nF 20% 63V
2206	4822 121 51252	470nF 5% 63V
2207	4822 121 51252	470nF 5% 63V
2208	4822 124 41509	33µF 20% 35V
2209	4822 124 41509	33µF 20% 35V
2210	4822 122 31947	100nF 20% 63V
2211	4822 124 40198	470µF 20% 16V
2212	4822 124 40435	10µF 20% 50V
2213	4822 122 31782	15nF 10% 50V
2214	4822 122 31782	15nF 10% 50V
2215	4822 122 31981	33nF 50V
2216	4822 122 31916	5,6nF 10% 63V
2217	4822 122 31981	33nF 50V
2218	4822 122 31916	5,6nF 10% 63V
2219	4822 124 41577	4,7µF 20% 50V
2220	5322 121 42498	680nF 5% 63V
2221	5322 121 42498	680nF 5% 63V
2222	4822 124 41643	100µF 20% 16V
2223	5322 122 31647	1nF 10% 63V

3012	4822 051 10562	5k6 2% 0,25W
3013	4822 051 10273	27k 2% 0,25W
3014	4822 051 10823	82k 2% 0,25W
3015	4822 116 52234	100k 5% 0,5W
3016	4822 100 11819	100k 30% 0,1W
3017	4822 051 10823	82k 2% 0,25W
3019	4822 051 10473	47k 2% 0,25W
3020	4822 051 10273	27k 2% 0,25W
3021	4822 051 20183	18k 5% 0,1W
3030	4822 051 10223	22k 2% 0,25W
3031	4822 051 10474	470k 2% 0,25W
3035	4822 051 10682	6k8 2% 0,25W
3036	4822 051 10472	4k7 2% 0,25W
3037	4822 051 10392	3k9 2% 0,25W
3038	4822 051 10472	4k7 2% 0,25W
3039	4822 051 10472	4k7 2% 0,25W
3040	4822 051 10472	4k7 2% 0,25W
3041	4822 051 10221	220Ω 2% 0,25W
3042	4822 051 10151	150Ω 2% 0,25W
3042	4822 051 51201	120Ω 1% 0,25W
3043	4822 116 52175	100Ω 5% 0,5W
3044	4822 051 10271	270Ω 2% 0,25W
3046	4822 116 52228	680Ω 5% 0,5W
3047	4822 051 10822	8k2 2% 0,25W
3048	4822 101 11188	2k 30%LIN 0,1W
3049	4822 051 20183	18k 5% 0,1W
3050	4822 051 10272	2k7 2% 0,25W
3051	4822 051 10563	56k 2% 0,25W
3052	4822 051 10102	1k 2% 0,25W
3053	4822 116 52233	10k 5% 0,5W
3055	4822 051 10103	10k 2% 0,25W
3056	4822 051 10471	470Ω 2% 0,25W
3058	4822 051 10472	4k7 2% 0,25W
3060	4822 051 10471	470Ω 2% 0,25W
3061	4822 051 10124	120k 2% 0,25W
3062	4822 051 10563	56k 2% 0,25W
3063	4822 051 10272	2k7 2% 0,25W
3064	4822 051 10224	220k 2% 0,25W
3065	4822 051 10124	120k 2% 0,25W
3066	4822 051 10824	820k 2% 0,25W
3081	4822 051 10569	56Ω 2% 0,25W
3105	4822 053 11121	120Ω 5% 2W
3106	4822 051 10561	560Ω 2% 0,25W
3107	4822 051 10102	1k 2% 0,25W
3108	4822 051 10561	560Ω 2% 0,25W
3109	4822 051 10562	5k6 2% 0,25W
3110	4822 051 10562	5k6 2% 0,25W
3112	4822 051 10562	5k6 2% 0,25W
3113	4822 051 10562	5k6 2% 0,25W
3115[5]	4822 051 10301	300Ω 2% 0,25W
3115	4822 051 10331	330Ω 2% 0,25W
3117[6]	4822 051 10561	560Ω 2% 0,25W
3117	4822 051 10681	680Ω 2% 0,25W
3119	4822 051 10562	5k6 2% 0,25W
3120	4822 051 10562	5k6 2% 0,25W
3121[5]	4822 051 10272	2k7 2% 0,25W
3121[6]	4822 051 10562	5k6 2% 0,25W
3122	4822 051 10122	1k2 2% 0,25W
3123	4822 051 10561	560Ω 2% 0,25W
3124	4822 051 10008	jumper
3125	4822 051 10102	1k 2% 0,25W
3126	4822 051 10102	1k 2% 0,25W
3127	4822 051 10152	1k5 2% 0,25W
3128	4822 051 10182	1k8 2% 0,25W
3150	4822 051 10103	10k 2% 0,25W
3151	4822 051 20222	2k2 5% 0,1W
3152	4822 051 10103	10k 2% 0,25W
3153	4822 051 10103	10k 2% 0,25W
3154	4822 051 10103	10k 2% 0,25W
3200	4822 051 10331	330Ω 2% 0,25W
3201	4822 051 10331	330Ω 2% 0,25W
3202	4822 051 10563	56k 2% 0,25W
3203	4822 051 10563	56k 2% 0,25W
3204	4822 101 11191	10k 30% 0.1W
3205	4822 052 10229	22Ω 5% 0,33W
3206	4822 051 10478	4Ω7 5% 0,25W
3207	4822 051 10223	22k 2% 0,25W
3208	4822 051 10272	2k7 2% 0,25W
3209	4822 051 10333	33k 2% 0,25W
3210	4822 050 11002	1k 1% 0,4W
3211	4822 051 10101	100Ω 2% 0,25W
3213	4822 116 52233	10k 5% 0,5W
3214	4822 051 10102	1k 2% 0,25W
3215	4822 051 10102	1k 2% 0,25W
3216	4822 051 10101	100Ω 2% 0,25W

Jumper

4010.. 4205	4822 051 10008	jumper

5010	4822 157 53302	
5010[6]	4822 157 61898	
5035	4822 157 53534	0,34µH 5%
5036[6]	4822 157 53609	0,36µH 5%
5036	4822 157 63824	0,36µH 5%
5037	4822 157 53537	1,35µH 5%
5038	4822 157 63076	1.2µH 5%
5039	4822 152 20678	33µH 10%
5080	4822 157 53539	0,27µH 5%
5103	4822 157 52511	0,83µH
5104	4822 157 63077	0.25µH 5%
5105	4822 157 52511	0,83µH
5042	4822 157 53634	5,6µH 10%
5042[6]	4822 157 62767	
5150	4822 157 63845	2,7µH

6037	4822 130 80888	BA682
6038	4822 130 80888	BA682
6039	4822 130 30621	1N4148
6040	4822 130 80446	LL4148
6041	4822 130 80446	LL4148
6042	4822 130 80446	LL4148
6043	4822 130 80446	LL4148
6106	4822 130 80888	BA682
6107	4822 130 80888	BA682
6108	4822 130 80888	BA682
6109	4822 130 80446	LL4148
6150	4822 130 80888	BA682
6151	4822 130 80888	BA682
6220	4822 130 81015	LLZ-C10

7000	4822 209 72812	TDA2549/C4
7030	5322 130 42012	BC858
7031	4822 130 61207	BC848
7035	4822 130 44121	BC338
7040	5322 130 42012	BC858
7100	4822 209 63059	TDA3856/V3
7101	4822 209 63784	TDA3857/V3
7102	4822 130 61207	BC848
7104	4822 130 61207	BC848
7150	4822 130 61207	BC848
7151	4822 130 61207	BC848
7200	4822 209 63967	TDA8417/V3
7220	4822 209 63734	TDA8425/V7
7232	5322 130 41982	BC848B
7233	4822 130 42513	BC858C

5) system BGDK
6) system BGLI
7) system BG

Nicam IF/sound module

[7]	4822 212 30071	IF NICAM BG
[8]	4822 212 30068	IF NICAM I

Various

1010[7]	4822 242 72554	OFWG3254
1010[8]	4822 242 72553	OFWJ3251
1042[7]	4822 242 72211	5,5MWHz
1042[8]	4822 153 30025	6MHz
1100	4822 242 70485	5,74MHz
1105[7]	4822 242 70714	5,5MHz
1105[8]	4822 242 71713	6,0MHz
1116[7]	4822 242 72301	TH316BOM-20800DAF
1116[8]	4822 242 72303	TH316BQM
1127[7]	4822 242 81187	11.7MHz
1127[8]	4822 242 81188	13.104MHz
1138	4822 242 81189	17.472MHz
1191	4822 071 54001	fuse T400mA
1200	4822 242 80208	10MHz

⊣⊢

2011	4822 124 41506	47µF 20% 16V
2012	4822 124 41577	4,7µF 20% 50V
2013	4822 122 31797	22nF 10% 63V
2014	4822 122 31797	22nF 10% 63V
2015	5322 121 42498	680nF 5% 63V
2016	4822 122 31784	4,7nF 10% 50V
2017	4822 122 33496	100nF 10% 63V
2042	4822 122 32139	12pF 5% 63V
2044	4822 122 31797	22nF 10% 63V
2047	4822 122 33496	100nF 10% 63V
2049	4822 122 33496	100nF 10% 63V
2050	4822 124 40849	330µF 20% 16V
2071	4822 122 31972	39pF 5% 50V
2072	4822 124 40435	10µF 20% 50V
2073	4822 122 31981	33nF 50V
2075	4822 122 31797	22nF 10% 63V
2076	4822 124 41407	0,47µF 20% 63V
2077	4822 122 31916	5,6nF 10% 63V
2100	4822 124 40242	1µF 20% 63V
2101	4822 122 31746	1000pF 5% 50V
2102	4822 122 31746	1000pF 5% 50V
2102	4822 122 32765	820pF 10% 63V
2104	4822 122 31784	4,7nF 10% 50V
2106	4822 124 41576	2,2µF 20% 50V
2107	4822 124 41576	2,2µF 20% 50V
2108	4822 122 32862	10nF 80% 50V
2109	4822 124 41509	33µF 20% 35V
2110	4822 122 31947	100nF 20% 63V
2116	5322 122 31647	1nF 10% 63V
2119	4822 124 40198	470µF 20% 16V
2122	4822 122 32862	10nF 80% 50V
2123	4822 122 31768	180pF 5% 50V
2124	4822 122 31768	180pF 5% 50V
2125	4822 122 32597	6,8nF 10% 63V
2126	5322 122 31647	1nF 10% 63V
2127	5322 122 31647	1nF 10% 63V
2128	4822 122 31808	150pF 10% 50V
2129	4822 122 32862	10nF 80% 50V
2130	4822 122 31808	150pF 10% 50V
2131	4822 122 31766	120pF 5% 50V
2132	4822 122 32862	10nF 80% 50V
2133	4822 121 41854	150nF 5% 63V
2134	5322 122 31647	1nF 10% 63V
2135	4822 122 32862	10nF 80% 50V
2136	4822 122 31808	150pF 10% 50V
2137	4822 122 31947	100nF 20% 63V
2138	4822 122 32862	10nF 80% 50V
2140	4822 121 42408	220nF 5% 63V
2141	4822 122 31784	4,7nF 10% 50V
2143	5322 122 31647	1nF 10% 63V
2150	4822 122 32863	22nF 80% 50V
2151	4822 124 41506	47µF 20% 16V
2160	4822 122 31765	100pF 5% 50V
2161	4822 122 31765	100pF 5% 50V
2168	4822 122 31947	100nF 20% 63V
2169	4822 124 41506	47µF 20% 16V
2170[7]	4822 122 31782	15nF 10% 50V
2170[8]	4822 122 31916	5,6nF 10% 63V
2171[7]	4822 122 31981	33nF 50V
2171[8]	5322 122 31648	12nF 10% 50V
2173	4822 122 31773	560pF 5% 50V
2174	4822 122 33498	2,7nF 10% 63V
2175	4822 122 32999	2,2N 5%
2176	4822 121 51252	470nF 5% 63V
2177	4822 122 32863	22nF 80% 50V
2180[7]	4822 122 31782	15nF 10% 50V
2180[8]	4822 122 31916	5,6nF 10% 63V
2181	5322 122 31648	12nF 10% 50V
2181	4822 122 31981	33nF 50V
2183	4822 122 31773	560pF 5% 50V
2184	4822 122 33498	2,7nF 10% 63V
2185	4822 122 32999	2,2nF 5%
2186	4822 121 51252	470nF 5% 63V
2187	4822 122 32863	22nF 80% 50V
2188	4822 124 41506	47µF 20% 16V
2189	4822 122 32863	22nF 80% 50V
2190	4822 122 31947	100nF 20% 63V
2191	4822 124 41643	100µF 20% 16V
2193	4822 124 40849	330µF 20% 16V
2194	4822 122 31947	100nF 20% 63V
2198	4822 121 51252	470nF 5% 63V
2200	4822 121 51252	470nF 5% 63V
2201	4822 121 51252	470nF 5% 63V
2202	4822 122 31766	120pF 5% 50V
2203	4822 124 41509	33µF 20% 35V
2204	4822 124 41509	33µF 20% 35V
2205	4822 122 31947	100nF 20% 63V
2207	4822 121 51252	470nF 5% 63V
2209	4822 121 51252	470nF 5% 63V
2210	4822 124 41577	4,7µF 20% 50V
2211	4822 121 42408	220nF 5% 63V
2213	4822 124 40195	150µF 20% 16V
2214	4822 122 31947	100nF 20% 63V
2215	4822 124 41506	47µF 20% 16V
2216	4822 122 31981	33nF 50V
2217	5322 121 42498	680nF 5% 63V
2218	4822 124 41643	100µF 20% 16V
2219	5322 121 42498	680nF 5% 63V
2220	4822 122 31916	5,6nF 10% 63V
2223	4822 122 31916	5,6nF 10% 63V
2224	4822 122 31981	33nF 50V
2225	4822 122 31782	15nF 10% 50V
2226	4822 122 31782	15nF 10% 50V

▭

3012	4822 051 10562	5k6 2% 0,25W
3013	4822 051 10273	27k 2% 0,25W
3014	4822 051 10823	82k 2% 0,25W
3015	4822 051 10104	100k 2% 0,25W
3016	4822 100 11819	100k 30% 0,1W
3019	4822 051 10473	47k 2% 0,25W
3020	4822 051 10273	27k 2% 0,25W
3021	4822 051 20183	18k 5% 0,1W
3030	4822 051 10223	22k 2% 0,25W
3035	4822 051 10472	4k7 2% 0,25W
3041	4822 051 10221	220Ω 2% 0,25W
3042[7]	4822 051 10151	150Ω 2% 0,25W
3042[8]	4822 051 10101	100Ω 2% 0,25W
3044	4822 051 10271	270Ω 2% 0,25W
3047	4822 050 21001	100Ω 1% 0,6W
3052	4822 051 10102	1k 2% 0,25W
3055	4822 051 10103	10k 2% 0,25W
3056	4822 051 10471	470Ω 2% 0,25W
3058	4822 051 10682	6k8 2% 0,25W
3071	4822 051 10124	120k 2% 0,25W
3072	4822 051 10471	470Ω 2% 0,25W
3073	4822 051 10824	820k 2% 0,25W
3074	4822 051 10563	56k 2% 0,25W
3075	4822 051 10272	2k7 2% 0,25W
3076	4822 051 10224	220k 2% 0,25W
3077	4822 051 10124	120k 2% 0,25W
3078	4822 051 10102	1k 2% 0,25W
3079	4822 051 10101	100Ω 2% 0,25W
3100	4822 051 10561	560Ω 2% 0,25W
3101	4822 051 10331	330Ω 2% 0,25W
3102	4822 051 10681	680Ω 2% 0,25W
3105	4822 051 10561	560Ω 2% 0,25W
3106	4822 051 10561	560Ω 2% 0,25W
3107	4822 051 10122	1k2 2% 0,25W
3108	4822 051 20222	2k2 5% 0,1W
3109	4822 053 11121	120Ω 5% 2W
3110	4822 051 10102	1k 2% 0,25W
3116	4822 051 10471	470Ω 2% 0,25W
3122	4822 051 10471	470Ω 2% 0,25W
3123	4822 051 10332	3k3 2% 0,25W
3124	4822 051 10332	3k3 2% 0,25W
3125	4822 051 10223	22k 2% 0,25W
3127	4822 051 10104	100k 2% 0,25W
3128	4822 051 10223	22k 2% 0,25W
3129	4822 051 10103	10k 2% 0,25W
3130	4822 051 10223	22k 2% 0,25W
3131	4822 051 10392	3k9 2% 0,25W
3133	4822 051 10333	33k 2% 0,25W
3134	4822 051 10103	10k 2% 0,25W
3135	4822 051 10103	10k 2% 0,25W
3136	4822 051 10104	100k 2% 0,25W
3137	4822 051 10104	100k 2% 0,25W
3138	4822 051 10105	1M 5% 0,25W
3139	4822 051 10273	27k 2% 0,25W
3140	4822 051 10824	820k 2% 0,25W
3141	4822 051 10152	1k5 2% 0,25W
3142	4822 051 10103	10k 2% 0,25W
3143	4822 051 10102	1k 2% 0,25W
3150	4822 052 10278	2Ω7 5% 0,33W
3158	4822 051 10473	47k 2% 0,25W
3159	4822 051 10473	47k 2% 0,25W
3160	4822 051 10331	330Ω 2% 0,25W
3161	4822 051 10331	330Ω 2% 0,25W
3168	4822 052 10278	2Ω7 5% 0,33W
3170[7]	4822 051 10682	6k8 2% 0,25W
3170[8]	4822 051 20183	18k 5% 0,1W
3171[7]	4822 051 10122	1k2 2% 0,25W
3171[8]	4822 051 10332	3k3 2% 0,25W
3172	4822 051 10472	4k7 2% 0,25W
3173	4822 051 10472	4k7 2% 0,25W
3177[7]	4822 051 10682	6k8 2% 0,25W
3177[8]	4822 051 10472	4k7 2% 0,25W
3180[7]	4822 051 10682	6k8 2% 0,25W
3180[8]	4822 051 20183	18k 5% 0,1W
3181[7]	4822 051 10122	1k2 2% 0,25W
3181[8]	4822 051 10332	3k3 2% 0,25W
3182	4822 051 10472	4k7 2% 0,25W
3183	4822 051 10472	4k7 2% 0,25W
3188	4822 052 10109	10Ω 5% 0,33W
3190	4822 051 10471	470Ω 2% 0,25W
3200	4822 101 11191	10k 30% 0.1W
3201	4822 051 10822	8k2 2% 0,25W
3202	4822 051 10512	5k1 2% 0,25W
3203	4822 051 10563	56k 2% 0,25W
3204	4822 051 10563	56k 2% 0,25W

Spare parts list / Stückliste / Liste

Nicam IF/sound module

3205	4822 052 10229	22Ω 5% 0,33W
3206	4822 051 10331	330Ω 2% 0,25W
3208	4822 051 10331	330Ω 2% 0,25W
3209	4822 051 10103	10k 2% 0,25W
3210	4822 051 10102	1k 2% 0,25W
3213	4822 051 10478	4Ω7 5% 0,25W
3214	4822 051 10223	22k 2% 0,25W
3215	4822 051 10272	2k7 2% 0,25W
3216	4822 051 10333	33k 2% 0,25W
3217	4822 051 10102	1k 2% 0,25W
3218	4822 051 10101	100Ω 2% 0,25W

Jumper

4000[7]	4822 051 10393	39k 2% 0,25W
4000[8]	4822 051 10392	3k9 2% 0,25W

5010	4822 157 53302	
5035	4822 157 53534	0,34µH 5%
5036	4822 157 63824	0,36µH 5%
5042	4822 157 62767	
5042	4822 157 53634	5,6µH 10%
5101	4822 157 52511	0,83µH
5102	4822 157 52511	0,83µH
5103	4822 157 63077	0.25µH 5%
5123	4822 157 50975	1 mH
5124	4822 157 50975	1 mH

6070	4822 130 80446	LL4148
6071	4822 130 80446	LL4148
6072	4822 130 80446	LL4148
6075	4822 130 80446	LL4148
6127	5322 130 34953	BB405B
6134	5322 130 31684	BB809
6140	4822 130 80446	LL4148
6190	4822 130 80446	LL4148
6191	4822 130 80954	LLZ-C5V6
6225	4822 130 81015	LLZ-C10

7000	4822 209 72812	TDA2549/C4
7035	4822 130 44121	BC338
7073	5322 130 42012	BC858
7078	4822 130 42513	BC858C
7100	4822 209 63784	TDA3857/V3
7106	4822 130 61207	BC848
7108	5322 130 42012	BC858
7120	4822 209 30909	TDA8732/C1
7133	4822 130 61207	BC848
7150	4822 209 30914	SAA7280/M2
7160	4822 130 61207	BC848
7161	4822 130 61207	BC848
7168	4822 209 73236	TDA1543/N2
7170	4822 209 83163	LM833N
7180	4822 209 83163	LM833N
7190	5322 130 41983	BC858B
7191	4822 130 44121	BC338
7200	4822 209 30147	TDA8415
7213	4822 209 63734	TDA8425/V7
7217▲	5322 130 41982	BC848B

7) BG

8) I

TXT module

9	4822 212 30062	IVT TXT europe
10	4822 212 30063	IVT TXT nordic
11	4822 212 30076	TXT spain
12	4822 212 30077	TXT east-europe
13	4822 212 30078	TXT europe
14	4822 212 30079	TXT nordic

Connectors

	4822 265 40469	BTB AU 6P
	4822 265 40471	BTB AU 8P

Various

1800	4822 242 81191	27MHz
1820	4822 242 71508	6MHz
1870	4822 071 53151	Fuse 315mA

2801	4822 122 31797	22nF 10% 63V
2802	4822 122 31746	1000pF 5% 50V
2803	4822 122 31774	56pF 5% 50V
2804	4822 122 32504	15pF 5% 50V
2805	4822 122 33496	100nF 10% 63V
2806	4822 122 33496	100nF 10% 63V
2807	4822 122 33496	100nF 10% 63V
2808	4822 122 33496	100nF 10% 63V
2810	4822 122 33496	100nF 10% 63V
2820	4822 122 32504	15pF 5% 50V
2820[11]	4822 126 10324	33pF 63V
2821	4822 122 32504	15pF 5% 50V
2821[11]	4822 126 10324	33pF 63V
2823	4822 122 33496	100nF 10% 63V
2825	4822 122 31772	47pF 5% 50V
2826	4822 122 31772	47pF 5% 50V
2830	4822 122 33496	100nF 10% 63V
2832	4822 122 33496	100nF 10% 63V
2833	4822 122 33496	100nF 10% 63V
2834	4822 124 40435	10µF 20% 50V
2836	4822 122 31965	220pF 5% 63V
2850	4822 122 33496	100nF 10% 63V
2860	4822 122 31825	27pF 10% 50V
2861	4822 122 33496	100nF 10% 63V
2862	4822 122 31774	56pF 5% 50V
2863	4822 122 33496	100nF 10% 63V
2870	4822 124 41643	100µF 20% 16V
2871	4822 124 41506	47µF 20% 16V
2872	4822 124 40272	33µF 20% 16V

3802	4822 051 10273	27k 2% 0,25W
3803	4822 051 10103	10k 2% 0,25W
3804	4822 051 10122	1k2 2% 0,25W
3805	4822 051 10122	1k2 2% 0,25W
3806	4822 051 10221	220Ω 2% 0,25W
3809	4822 116 52176	10Ω 5% 0,5W
3810	4822 116 52207	1k 2 5% 0,5W
3811	4822 051 10122	1k2 2% 0,25W
3812	4822 051 10122	1k2 2% 0,25W
3813	4822 051 10122	1k2 2% 0,25W
3814	4822 051 10122	1k2 2% 0,25W
3815	4822 116 52207	1k 2 5% 0,5W
3816	4822 116 52207	1k 2 5% 0,5W
3817	4822 051 10122	1k2 2% 0,25W
3818	4822 051 10122	1k2 2% 0,25W
3819	4822 051 10122	1k2 2% 0,25W
3820	4822 051 10471	470Ω 2% 0,25W
3821	4822 051 10102	1k 2% 0,25W
3822	4822 051 10103	10k 2% 0,25W
3823	4822 051 10105	1M 5% 0,25W
3824	4822 051 20222	2k2 5% 0,1W
3825	4822 051 20222	2k2 5% 0,1W
3826	4822 116 52175	100Ω 5% 0,5W
3827	4822 116 52175	100Ω 5% 0,5W
3830	4822 051 10829	82Ω 2% 0,25W
3831	4822 051 10821	820Ω 2% 0,25W
3832	4822 051 10102	1k 2% 0,25W
3833	4822 051 10102	1k 2% 0,25W
3834	4822 051 10681	680Ω 2% 0,25W
3835	4822 051 10103	10k 2% 0,25W
3836	4822 051 10473	47k 2% 0,25W
3837	4822 051 10102	1k 2% 0,25W
3838	4822 051 10473	47k 2% 0,25W
3839	4822 051 10151	150Ω 2% 0,25W
3840	4822 051 10228	2Ω2 5% 0,25W
3842	4822 051 10561	560Ω 2% 0,25W
3850	4822 116 52206	120Ω 5% 0,5W
3851	4822 051 10102	1k 2% 0,25W
3852	4822 051 10102	1k 2% 0,25W
3853	4822 116 52206	120Ω 5% 0,5W
3854	4822 051 10102	1k 2% 0,25W
3855	4822 051 10102	1k 2% 0,25W
3856	4822 116 52206	120Ω 5% 0,5W
3857	4822 051 10102	1k 2% 0,25W
3858	4822 051 10102	1k 2% 0,25W
3860	4822 051 10272	2k7 2% 0,25W
3861	4822 051 10562	5k6 2% 0,25W
3862	4822 051 10333	33k 2% 0,25W
3863	4822 051 10223	22k 2% 0,25W
3864	4822 051 10103	10k 2% 0,25W
3865	4822 051 10392	3k9 2% 0,25W
3866	4822 051 10272	2k7 2% 0,25W
3867	4822 116 52206	120Ω 5% 0,5W
3868	4822 051 10101	100Ω 2% 0,25W
3869	4822 051 10821	820Ω 2% 0,25W
3870	4822 050 24701	470Ω 1% 0,6W
3871	4822 050 22201	220Ω 1% 0,6W
3872	4822 051 10331	330Ω 2% 0,25W
3873	4822 051 10271	270Ω 2% 0,25W
3874	4822 051 10181	180Ω 2% 0,25W
3890[9]	4822 051 10102	1k 2% 0,25W
3890[13]	4822 051 10103	10k 2% 0,25W
3890[14]	4822 051 10153	15k 2% 0,25W
3890[10]	4822 051 10272	2k7 2% 0,25W
3890[11]	4822 051 10562	5k6 2% 0,25W
3890[12]	4822 051 10822	8k2 2% 0,25W

Jumper

4801.. 4862	4822 051 10008	jumper

5800	4822 157 53302	
5801	4822 152 20677	
5834	4822 157 53001	27µH 10%
5870	4822 157 51157	3.3µH

6800	4822 130 82921	LLZ-F3V9
6840	4822 130 80446	LL4148
6850	4822 130 80446	LL4148
6851	4822 130 80446	LL4148
6852	4822 130 80446	LL4148
6860	4822 130 80446	LL4148
6870	4822 130 80905	LLZ-F5V1
6871	4822 130 81227	LLZ-F5V6

7800	4822 209 31214	SAA5246P/E
7800[12]	4822 209 31215	SAA5246P/H
7810	4822 209 61805	HY6264P-15
7810[11]	4822 209 72681	MSM5165AL-12RS
7820[12]	4822 209 30281	PCF84C81A/097

Spare parts list / Stückliste / Liste

TXT module

7820[9,10]	4822 209 31069	PCF84C81A/098
7820[11]	4822 209 62479	MAB8461/W196
7821	4822 130 61207	BC848
7822	4822 130 61207	BC848
7831	4822 130 42513	BC858C
7833	5322 130 42136	BC848C
7850	5322 130 42136	BC848C
7851	5322 130 42136	BC848C
7852	5322 130 42136	BC848C
7860	4822 130 61207	BC848
7861	5322 130 60159	BC846B
7862	5322 130 42136	BC848C
7863	4822 130 61207	BC848
7870	4822 130 41344	BC337-40
7871	5322 130 42012	BC858
7872	4822 130 41344	BC337-40

9) IVT Europe BGLI
10) IVT Nordic
11) CCT Spain
12) CCT Europe BGDK
13) CCT Europa BGLI
14) CCT Nordic

PIP module

	4822 212 23605	PIP module

Connectors

	4822 265 30828	5p female
	4822 265 40472	10p female
	4822 265 40503	5p male

Various

1155	4822 320 40051	delay line DL711
1201	4822 242 70304	8,867238 MHz
1212	4822 242 70736	7,159090 MHz

⊣⊢

2103	4822 122 32444	33pF 5% 50V
2105	4822 122 31766	120pF 5% 50V
2118	4822 122 31775	680pF 5% 50V
2119	4822 122 31808	150pF 10% 50V
2120	4822 122 31807	1200pF 5% 50V
2125	4822 122 32863	22nF 80% 50V
2155	4822 122 32862	10nF 80% 50V
2158	4822 122 32862	10nF 80% 50V
2160	4822 124 40242	1µF 20% 63V
2161	4822 124 41576	2,2µF 20% 50V
2162	4822 122 32893	100nF 80% 50V
2171	4822 122 31961	68pF 5% 63V
2172	4822 126 11175	22pF 5% 50V
2176	4822 126 11175	22pF 5% 50V
2177	4822 122 31961	68pF 5% 63V
2180	4822 122 31768	180pF 5% 50V
2181	4822 122 31768	180pF 5% 50V
2185	4822 122 32863	22nF 80% 50V
2187	4822 122 32863	22nF 80% 50V
2189	4822 122 31746	1000pF 5% 50V
2196	4822 122 32893	100nF 80% 50V
2197	4822 122 31385	22pF 50V
2201	4822 122 31746	1000pF 5% 50V
2202	4822 125 50045	20pF
2211	4822 122 31746	1000pF 5% 50V
2212	4822 125 50045	20pF
2220	5322 121 42661	330nF 5% 63V
2222	4822 122 32542	47nF 10% 63V
2227	5322 122 31842	330pF 5% 63V
2230	4822 124 40242	1µF 20% 63V
2232	4822 124 41678	22µF 20% 25V
2234	4822 122 33496	100nF 10% 63V
2235	4822 124 41578	6,8µF 20% 50V
2238	4822 121 42937	2,7nF 1% 250V
2239	4822 122 32893	100nF 80% 50V
2250	4822 121 51115	270nF 10% 63V
2251	5322 122 31647	1nF 10% 63V
2255	4822 122 31766	120pF 5% 50V
2260	4822 122 32893	100nF 80% 50V
2270	4822 122 32893	100nF 80% 50V
2340	4822 124 41506	47µF 20% 16V
2345	4822 124 41506	47µF 20% 16V
2350	4822 124 40849	330µF 20% 16V
2351	4822 124 41643	100µF 20% 16V
2380	4822 122 32927	220nF
2381	4822 122 32927	220nF
2382	4822 122 32927	220nF
2383	4822 122 32927	220nF
2384	4822 122 32927	220nF
2385	4822 122 32927	220nF
2390	4822 122 32893	100nF 80% 50V
2399	4822 122 31746	1000pF5%50V
2404	4822 122 31965	220pF 5% 63V
2405	4822 122 32862	10nF 80% 50V
2409	4822 122 31965	220pF 5% 63V
2410	4822 122 32862	10nF 80% 50V
2413	4822 122 31765	100pF 5% 50V
2414	4822 122 32862	10nF 80% 50V
2415	4822 122 31965	220pF 5% 63V
2430	4822 122 32893	100nF 80% 50V
2432	4822 122 32893	100nF 80% 50V
2434	4822 122 32893	100nF 80% 50V
2438	4822 121 42472	10nF 10% 50V
2439	4822 121 41856	22nF 5% 250V
2440	4822 122 31965	220pF 5% 63V
2441	4822 122 31727	470pF 5% 63V
2442	4822 124 40242	1µF 20% 63V
2446	4822 122 32893	100nF 80% 50V
2448	4822 122 32893	100nF 80% 50V
2450	4822 122 32856	8,2nF 10% 63V
2455	4822 122 31972	39pF 5% 50V
2459	4822 124 41997	470µF 10V
2466	4822 122 32893	100nF 80% 50V

⊣□⊢

2444	4822 051 10224	220k 2% 0,25W
3103	4822 051 10821	820Ω 2% 0,25W
3104	4822 051 10821	820Ω 2% 0,25W
3105	4822 051 10362	3k6 2% 0,25W
3106	4822 116 52233	10k 5% 0,5W
3107	4822 051 10103	10k 2% 0,25W
3108	4822 051 10103	10k 2% 0,25W
3155	4822 051 10391	390Ω 2% 0,25W
3156	4822 051 10122	1k2 2% 0,25W
3157	4822 100 11391	330Ω 30% LIN
3158	4822 051 10759	75Ω 2% 0,25W
3170	4822 051 10112	1k1 2% 0,25W
3175	4822 051 10621	620Ω 2% 0,25W
3196	4822 050 11002	1k 1% 0,4W
3200	4822 051 10103	10k 2% 0,25W
3201	4822 051 10103	10k 2% 0,25W
3202	4822 051 10103	10k 2% 0,25W
3211	4822 051 10103	10k 2% 0,25W
3212	4822 051 10103	10k 2% 0,25W
3214	4822 051 10102	1k 2% 0,25W
3220	4822 051 10512	5k1 2% 0,25W
3221	4822 116 52233	10k 5% 0,5W
3222	4822 051 10008	jumper
3227	4822 116 52299	7k5 5% 0,5W
3228	4822 051 10472	4k7 2% 0,25W
3231	4822 051 10682	6k8 2% 0,25W
3232	4822 051 10229	22Ω 2% 0,25W
3233	4822 051 10471	470Ω 2% 0,25W
3234	4822 051 10361	360Ω 2% 0,25W
3235	4822 051 10122	1k2 2% 0,25W
3236	4822 051 10471	470Ω 2% 0,25W
3237	4822 051 10332	3k3 2% 0,25W
3238	4822 051 10333	33k 2% 0,25W
3239	4822 100 11319	4k7 30% LIN
3241	4822 051 10271	270Ω 2% 0,25W
3242	4822 050 11002	1k 1% 0,4W
3250	4822 051 10911	910Ω 2% 0,25W
3265	4822 051 10104	100k 2% 0,25W
3270	4822 051 10103	10k 2% 0,25W
3275	4822 051 10103	10k 2% 0,25W
3276	4822 051 10102	1k 2% 0,25W
3330	4822 051 20008	0Ω 5% 0,1W
3335	4822 051 10271	270Ω 2% 0,25W
3336	4822 051 10432	4k3 2% 0,25W
3337	4822 051 10122	1k2 2% 0,25W
3338	4822 051 10332	3k3 2% 0,25W
3340	4822 051 10202	2k 2% 0,25W
3341	4822 052 10229	22Ω 5% 0,33W
3345	4822 052 10229	22Ω 5% 0,33W
3353	4822 052 10568	5Ω6 5% 0,33W

Spare parts list / Stückliste / Liste

PIP module

3354	4822 051 10271	270Ω 2% 0,25W
3390	4822 051 10151	150Ω 2% 0,25W
3391	4822 051 10181	180Ω 2% 0,25W
3394	4822 051 10151	150Ω 2% 0,25W
3395	4822 051 10181	180Ω 2% 0,25W
3398	4822 051 10151	150Ω 2% 0,25W
3399	4822 051 10181	180Ω 2% 0,25W
3404	4822 051 10431	430Ω 2% 0,25W
3405	4822 051 10361	360Ω 2% 0,25W
3410	4822 051 10391	390Ω 2% 0,25W
3411	4822 051 10471	470Ω 2% 0,25W
3412	4822 051 10751	750Ω 2% 0,25W
3414	4822 051 10471	470Ω 2% 0,25W
3416	4822 051 10182	1k8 2% 0,25W
3434	4822 051 10473	47k 2% 0,25W
3436	4822 051 10473	47k 2% 0,25W
3437	4822 051 10101	100Ω 2% 0,25W
3438	4822 051 10513	51k 2% 0,25W
3440	4822 116 52222	390Ω 5% 0,5W
3441	4822 051 10519	51Ω 2% 0,25W
3442	4822 051 10919	91Ω 2% 0,25W
3444	4822 116 52175	100Ω 5% 0,5W
3446	4822 116 52175	100Ω 5% 0,5W
3448	4822 051 10392	3k9 2% 0,25W
3450	4822 051 10471	470Ω 2% 0,25W
3452	4822 051 10471	470Ω 2% 0,25W
3454	4822 051 10471	470Ω 2% 0,25W
3460	4822 116 52231	820Ω 5% 0,5W
3461	4822 116 52259	2k4 5% 0,5W
3462	4822 051 10333	33k 2% 0,25W
3463	4822 116 52299	7k5 5% 0,5W
3464	4822 051 10472	4k7 2% 0,25W
3470	4822 052 10108	1Ω 5% 0,33W
3618	4822 052 10568	5Ω6 5% 0,33W
3621	4822 051 10105	1M 5% 0,25W
3997	4822 051 10339	33Ω 2% 0,25W
3997	4822 051 10279	27Ω 2% 0,25W

Jumper

4001.. 4415	4822 051 10008	jumper

5118	4822 157 60435	10,3µH 6%
5155	4822 157 60433	7,2µH 6%
5157	4822 157 60434	9,4µH 6%
5170	4822 157 60432	10,3µH
5175	4822 157 60432	10,3µH
5190	4822 157 60432	10,3µH
5400	4822 157 50943	12µH 10%
5402	4822 157 50943	12µH 10%
5403	4822 157 52333	100µH 10%
5406	4822 157 50943	12µH 10%
5408	4822 157 50943	12µH 10%
5410	4822 157 50943	12µH 10%

6300	4822 130 80906	LLZ-C7V5

7103	5322 130 41982	BC848B
7105	5322 130 41982	BC848B
7125	4822 209 63927	TDA4554/V1
7126	4822 209 30389	TDA4510/V8
7200	5322 130 41982	BC848B
7210	5322 130 41982	BC848B
7233	5322 130 41983	BC858B
7234	5322 130 41982	BC848B
7335	5322 130 41982	BC848B
7337	5322 130 41982	BC848B
7338	5322 130 41982	BC848B
7350	4822 130 42616	BC818-40
7380	4822 209 60479	TEA5114A
7400	5322 130 41983	BC858B
7402	5322 130 41983	BC858B
7404	5322 130 41983	BC858B
7406	4822 209 62473	SDA9087
7408	4822 209 63291	SDA9088/2Ω
7410	4822 209 63644	SDA9086-3
7755	4822 209 72363	TDA2579A/N8

Control module DAS

[17]	4822 212 30036	control module
[18]	4822 212 30029	control module

Connectors

▲	4822 265 30384	mains K11
▲	4822 265 40596	mains K25
	4822 264 40207	3p male
	4822 265 30951	4p male

Various

▲	4822 276 12597	Mains switch
	4822 267 31014	Headphone socket
	4822 276 50354	Swith assembly
	4822 212 23667	IR receiver GP1U52YP
	4822 209 72895	LED TLUV5320
	4822 256 91766	LED holder

2233	4822 121 43526	47nF 5% 100V
2234	4822 121 43526	47nF 5% 100V
2713	5322 124 21189	100µF 20% 40V

3246	4822 116 52219	330Ω 5% 0,5W
3247	4822 116 52175	100Ω 5% 0,5W
3248	4822 116 52219	330Ω 5% 0,5W
3249	4822 116 52175	100Ω 5% 0,5W
3729	4822 116 52232	910Ω 5% 0,5W
3730	4822 116 52215	220Ω 5% 0,5W
3775	4822 116 52175	100Ω 5% 0,5W
3776[17]	4822 116 52264	5K6 5% 0,5W
3776[18]	4822 116 52289	27K 5% 0,5W
3777[17]	4822 116 52289	27K 5% 0,5W
3777[18]	4822 116 52264	5K6 5% 0,5W
3778[17]	4822 116 52233	56K 5% 0,5W
3778[18]	4822 116 52291	10K 5% 0,5W
3779[17]	4822 116 52291	10K 5% 0,5W
3779[18]	4822 116 52233	56K 5% 0,5W

17)



18)